

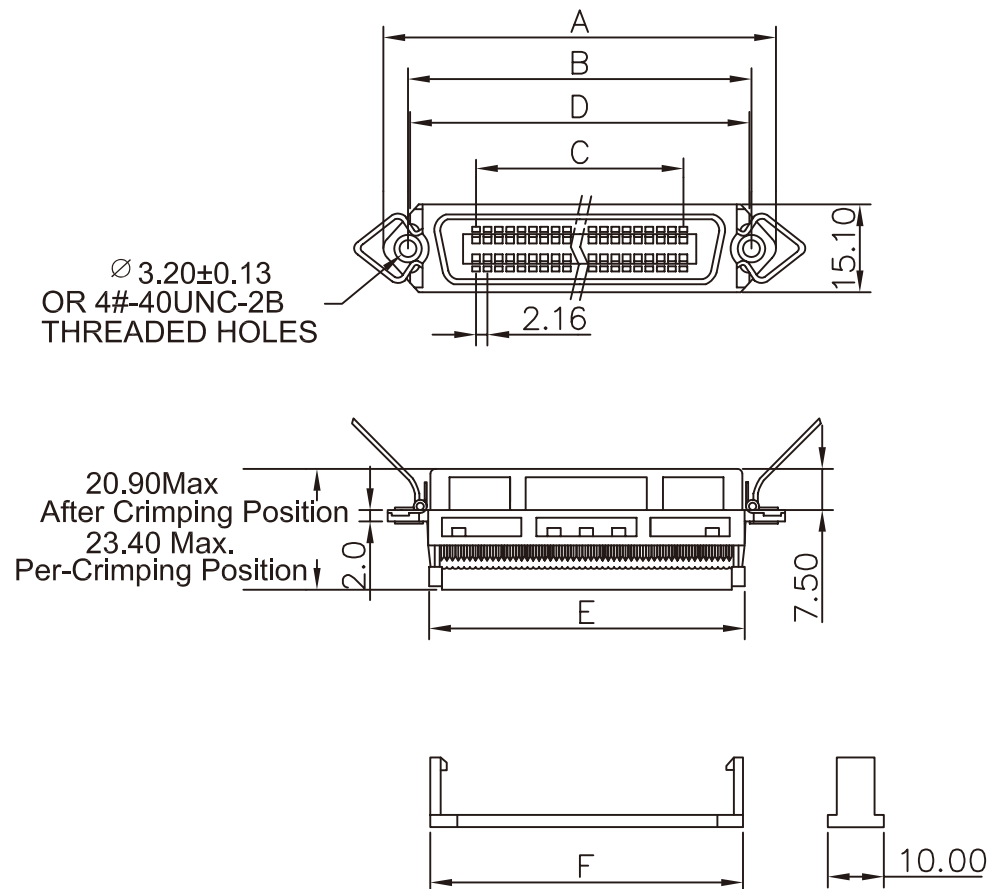


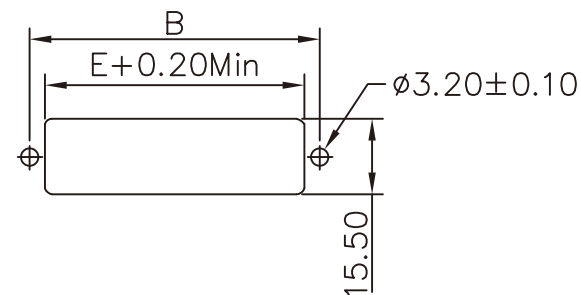

SPECIFICATIONS:

Current Rating:1A AWG#28/1,2A:AWG26
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megohms Min.
 Dielectric Withstanding voltage:500V AC AT Sea Level
 Operating Temperature:-55° C TO +105°C (limited BY cABLE)
 Insulator:Polyester Resin&Glass Reinforced(UL 94V-0)
 Contact:Phosphor Bronze,Gold Plated Over Nickel

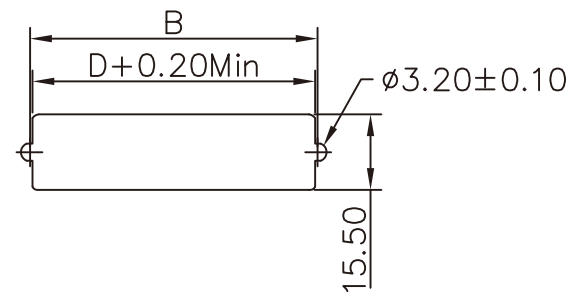

Number of Positions	A	B	C	D	E	F
	±0.25	±0.13	±0.13	±0.25	±0	±0.25
36	67.80	59.74	36.72	58.80	53.30	54.40
50	82.80	74.85	51.84	74.25	68.50	70.50

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1


DATE

SIZE A4

TOLERANCES ARE

X. ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

PJECTION



ORDER INFORMATION

CFP-S-xx-LF
 SERIES | LEADFREE
 36.50 WAY
 FEMALE

DESCRIPTION: