


## 一、工程圖 (Engineering Picture)

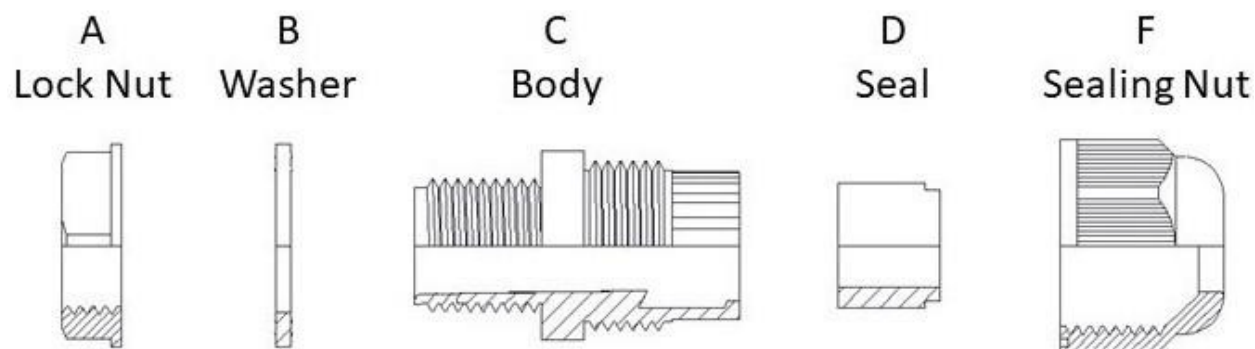

## 二、產品參數

螺牙規格: 公制(Metric)、PG、G (PF / BSP / PS)、NPT

產品材質: UL合格之NYLON 66-防火等級 94V-2

可訂製防火等級UL94V-20

夾緊圈為耐候橡膠材質。

溫度範圍:  $-40^{\circ}\text{C} \sim 100^{\circ}\text{C}$ , 瞬間可耐熱至 $120^{\circ}\text{C}$

防水等級: IP68-10

產品特性: 特殊夾緊爪及夾緊圈之設計, 抗拉力優秀, 安裝簡單方便

可防水、防塵、耐弱酸、酒精、油及一般溶劑。

顏色種類: 黑色、灰色。其他顏色可依需求訂做。

**RoHS Compliant**

TOLERANCES ARE

照片框

**ORDER INFORMATION**

CGN-K1-M12xxy-LF

SERIES

LEADFREE

03S: CABLE RANGE 1-3mm

06S: CABLE RANGE 3-6.5mm

07L: CABLE RANGE 4-8mm

BLACK

THREAD O.D. 12mm

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

X,  $\pm 0.30$

.X,  $\pm 0.30$

.XX,  $\pm 0.20$

.XXX,  $\pm 0.10$

ANG  $\pm 1^{\circ}$

PPOJECTION

DESCRIPTION: 尼龍防水電纜固定頭

### 三、產品規格

| 螺牙規格    | 編號             | 電纜範圍       | 螺紋外徑       | 螺紋長度         | 扳手徑         | 包裝      |
|---------|----------------|------------|------------|--------------|-------------|---------|
| Thread  | Item.No.       | CableRange | ThreadO.D. | ThreadLength | SpannerSize | Std.Pkg |
|         |                | Φ(mm)      | C1(mm)     | C2(mm)       | A&F(mm)     | (pcs)   |
| M12x1.5 | CGN-K1-M1203S  | 1-3        | 12         | 8.5          | 18/15       | 50      |
|         | CGN-K1-M1206S  | 3-6.5      | 12         | 8.5          | 18/15       | 50      |
|         | CGN-K1-M1203SL | 1-3        | 12         | 15           | 18/15       | 50      |
|         | CGN-K1-M1206SL | 3-6.5      | 12         | 15           | 18/15       | 50      |
|         | CGN-K1-M1205   | 3-5.5      | 12         | 8.5          | 18/19       | 50      |
|         | CGN-K1-M1207   | 4-8        | 12         | 8.5          | 18/19       | 50      |
|         | CGN-K1-M1205L  | 3-5.5      | 12         | 15           | 18/19       | 50      |
|         | CGN-K1-M1207L  | 4-8        | 12         | 15           | 18/19       | 50      |

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ± 0.30

.X ± 0.30

.XX ± 0.20

.XXX ± 0.10

ANG ± 1°

PPOJECTION

照片框

ORDER INFORMATION

CGN-K1-M12xxy-LF

SERIES

BLACK

LEADFREE

03S: CABLE RANGE 1-3mm

06S: CABLE RANGE 3-6.5mm

07L: CABLE RANGE 4-8mm

THREAD O.D. 12mm

DESCRIPTION: 尼龍防水電纜固定頭