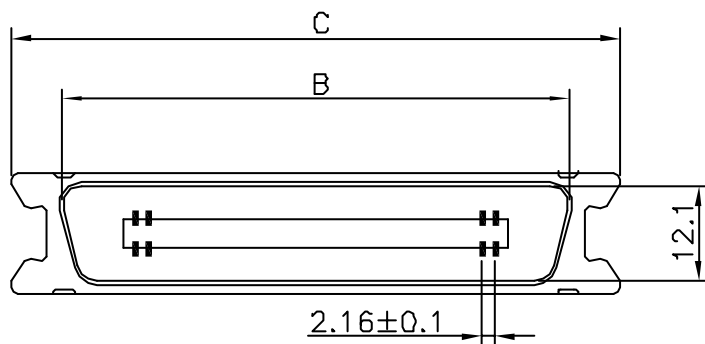


Positions

	A	B	C
36	46.6	49.3	62.1
50	61.9	64.4	77.4

Material & Finish

SHELL:

Steel
Zinc plated, Tin plated
or Nickel plated steel

PIN CONTACT:

Phosphor bronze or brass
Gold plated

INSULATOR:

PBT & Glass-fibre reinforced
UL-94-V0

NUMBER OF CONTACT:

36,50

CURRENT RATING:

5 Amp

DIELECTRIC STRENGTH:

1000V for one minute

INSULATOR RESISTANCE:

1000M Ω Min. (at 500V DC)

TEMPERATURE:

-55°C to +105°C

CI-P-xx-LF

LEADFREE

RoHS Compliant

MORETHANALL
CONNECTORS
ASSEMBLIES

煜倫股份有限公司

PART NO. **CI-P-xx**

DWG NO. **CI-P-xx**

FILE NO.


UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X $\pm$ 0.2
.XX $\pm$
.XXX $\pm$
AWG

DESCRIP TION:

AREA

**57 IDC TYPE
MOLDED TYPE MALE**

REVISIONS

HK

DATE