

● MATERIALS: (RoHS Compliant)

Housing: Plastic Thermoplastic L.C.P UL94V-0,White

Termination Cover: PBT+ Glass Fiber UL94V-0, Black

Contacts: Phosphor Bronze Gold Selective Plated

Front Shell: Steel,Nickel Plated Over Copper

● ELECTRICAL CHARACTERISTICS:






Contact Current Rating: 0.5 Amp

Dielectric Withstanding Voltage: 250V AC

Insulation Resistance: >500MΩ/Min

Contact Resistance: 35mΩ/Max

Operation Temperature: -55°C ~ +85°C

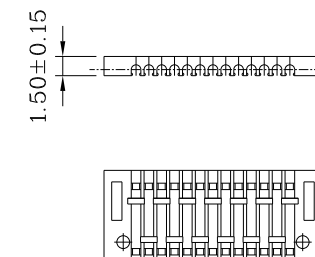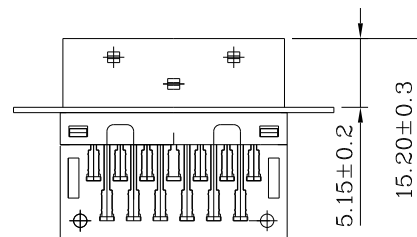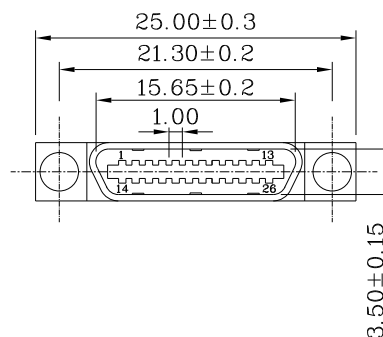

Termination Cover
(2 Places)

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

CIS-PI-26-LF
SERIES T LEADFREE
IDC 26WAY
PLUG

DESCRIPTION: 1.0(.039") Smart Serial Cable Plug Connector I.D.C Type