
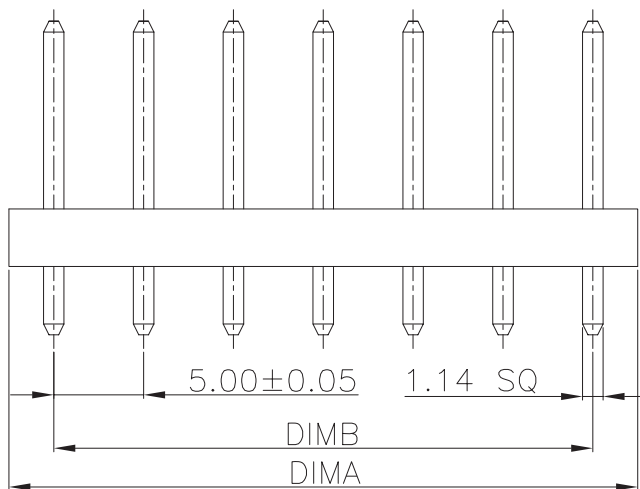


Specifications:
 Current rating:7.0A AC,DC
 Voltage rating:250V AC,DC
 Contact resistance:20m Ohm Max
 Insulation resistance:1000M Ohm Min
 Withstanding voltage:1500V AC/minute
 Temperature range:-40°C to +105°C
 Material and Finish:
 Insulator:Nylon 66 (UL94V-2)
 Insulator Color:White
 Contact:Brass
 Finish:Tin Plated

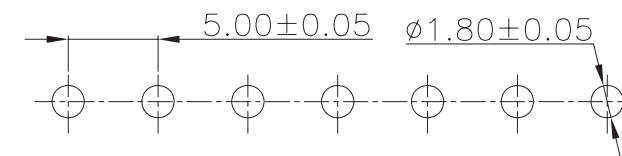

P.C.B Layout

CIRCUITS	DIM.A	DIM.B	CIRCUITS	DIM.A	DIM.B
2	10.00	5.00	8	40.00	35.00
3	15.00	10.00	9	45.00	40.00
4	20.00	15.00	10	50.00	45.00
5	25.00	20.00	11	55.00	50.00
6	30.00	25.00	12	60.00	55.00
7	35.00	30.00			

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
 .X ± 0.15
 .XX ± 0.10
 .XXX ±
 ANG ±

照片框

ORDER INFORMATION

CKX-D-xx-LF
 SERIES T LEADFREE
 02~12 WAY
 DIP 180°

DESCRIPTION: 5.0mm Wire To Board Wafer