
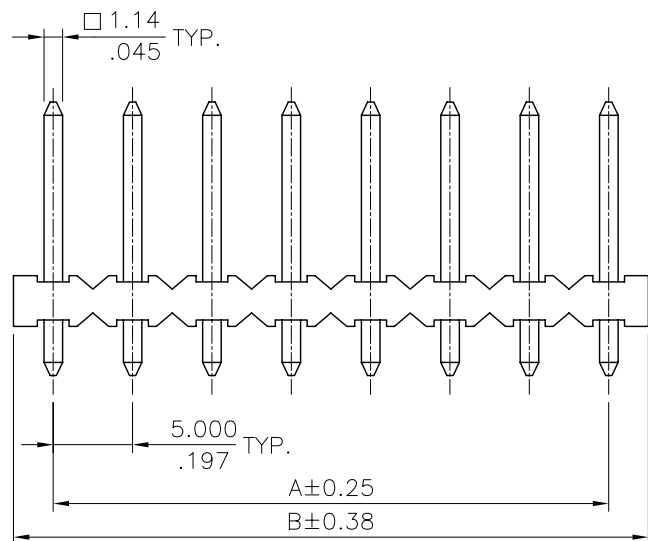



A = 5.00 * No. of Spaces
 B = A + 5.00
 * Available in 2 through 20 circuits



Recommended P.C. Board Layout

Material:

* Insulation: Glass filled polyester UL 94V-0

* Contact: Brass

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
 .X ± 0.38
 .XX ± 0.25
 .XXX ± 0.15
 ANG ±

PPOJECTION

照片框

ORDER INFORMATION

CKX-DB-xx-LF
 SERIES | T LEADFREE
 | 02~20 WAY
 | BREAKAWAY
 | DIP 180°

DESCRIPTION: