

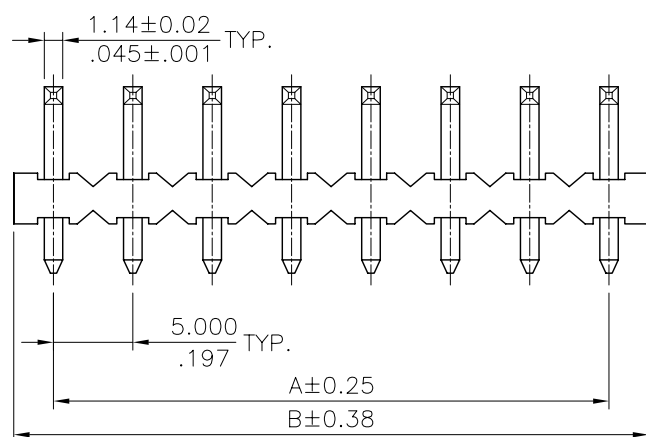
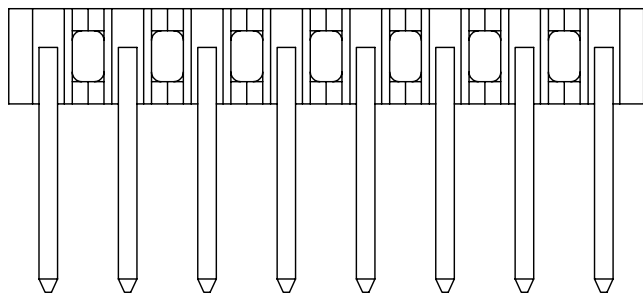




A = 5.00 * No. of Spaces

B = A + 5.00

* Available in 2 through 20 circuits

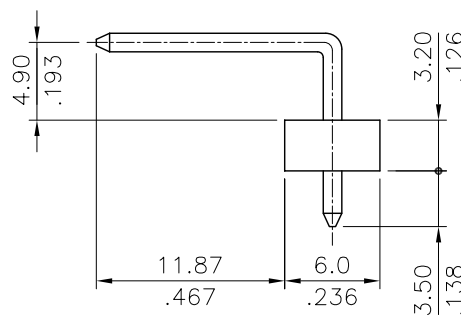

Recommended P.C. Board Layout

Material:

* Insulation: Glass filled polyester UL 94V-0

* Contact: Brass

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±
.X ± 0.38
.XX ± 0.25
.XXX ± 0.10
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

CKX-R-xx-LF
SERIES | LEADFREE
02~20WAY
DIP 90°

DESCRIPTION: