


J
I
H
G
F
E
D
C
B
A

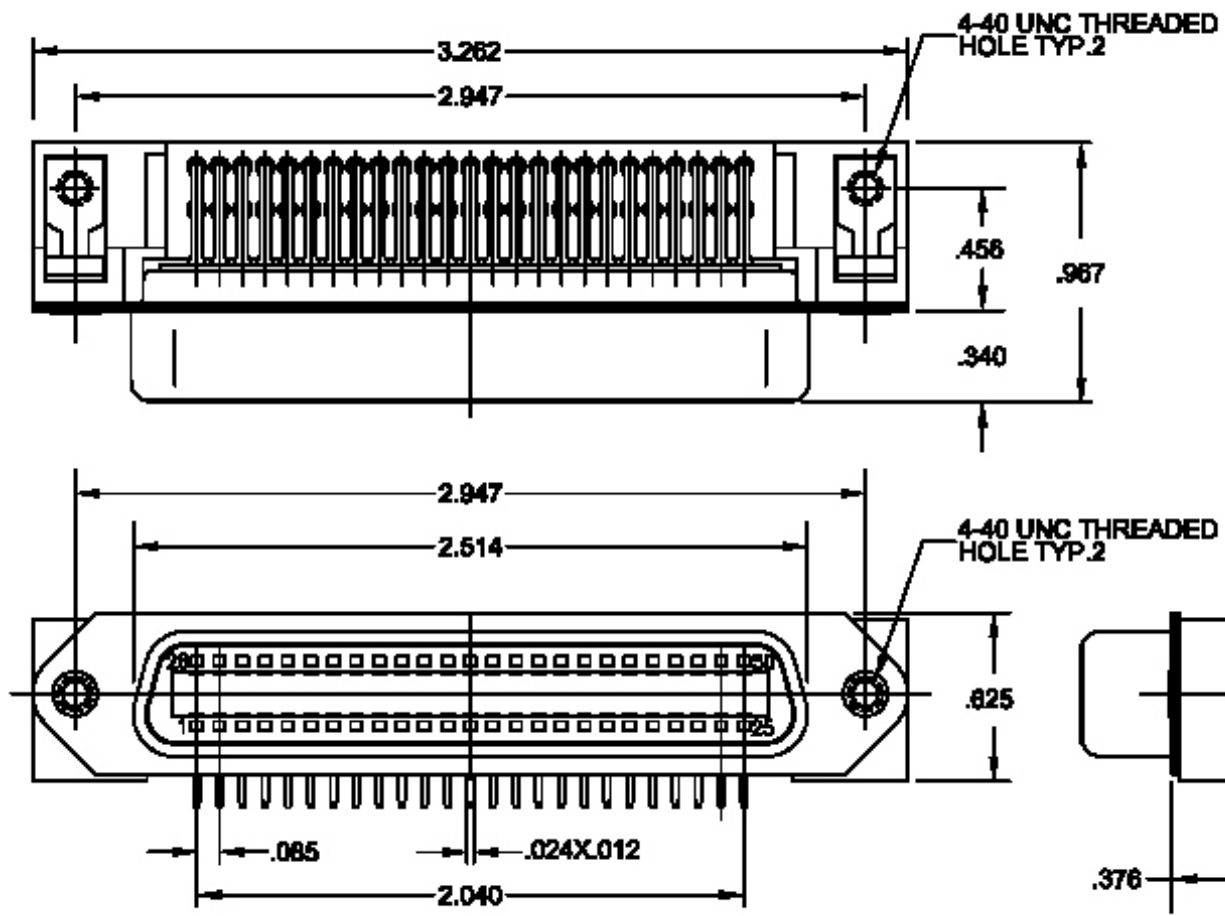

MATERIALS:

INSULATOR : THERMOPLASTIC POLYESTER,
COLOR: BLACK, UL94V-0 RATING.
SHELLS: STEEL, NICKEL PLATED
CONTACTS: COPPER ALLOY 30u" OF GOLD
PLATED ON CONTACT AREA, TINLEAD ON TAILS
OVER NICKEL

ELECTRICAL SPECIFICATIONS

CONTACT CURRENT RATING: 1 AMPERE
DIELECTRIC WITHSTANDING VOLTAGE:
1000 VAC R.M.S.
INSULATION RESISTANCE: 1000 MEGOHMS
MIN. AT 500 VDC.
CONTACT RESISTANCE: 30 MILLIOHMS MAX
OPERATING TEMPERATURE: -55°C TO +105°C



煜倫股份有限公司

PART NO. CL-SLN-50									
DWG NO. CL-SLN-50		CHECKED BY CY	TOLERANCES ARE .X ± 0.2 .XX ± .XXX ± AWG	DESCRIP TION:					
FILE NO.		DRAWING BY							
UNIT / mm	SCALE 1:1	PROJECTION 		AREA	REVISIONS	HK	DATE		