
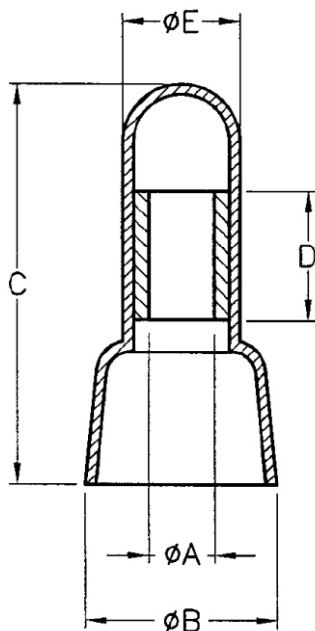




電壓(VOLTAGE): 300V.

溫度(TEMPERATURER): 105°C.

使用工具: 氣動工具MR-30A, IZUMI AC-5ND, 手動工具AK-25, AK-28, IZUMI #7A.

CLE-xx-WH-LF

LEADFREE

01 = 1.25mm²

02 = 2.00mm²

05 = 5.50mm²

08 = 8.00mm²

PART NO.	WIRE RANGE	A	B	C	D	E
CLE-01	#22-16 1.25mm ²	2.5	7.7	18.0	7.0	5.0
CLE-02	#16-14 2mm ²	3.2	9.5	20.0	7.0	5.7
CLE-05	#12-10 5.5mm ²	4.4	12.3	25.5	8.4	7.6
CLE-08	#8 8mm ²	5.2	14.2	27.7	8.5	9.5

RoHS Compliant

MORETHANALL
CONNECTORS
ASSEMBLIES

煜倫股份有限公司

PART NO. **CLE-xx-WH**

DWG NO. **CLE-xx-WH**

FILE NO.


UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X ± 0.2

.XX ±

.XXX ±

AWG

DESCRIP TION:

AREA

REVISIONS

HK

DATE