

Dimension Information:

Pos	Dim.A	Dim.B	Pos	Dim.A	Dim.B
2	1.25	5.85	08	8.75	13.35
3	2.50	7.10	09	10.00	14.60
4	3.75	8.35	10	11.25	15.85
5	5.00	9.60	11	12.50	17.10
6	6.25	10.85	12	13.75	18.35
7	7.50	12.10	13	15.00	19.60
			14	16.25	20.85
			15	17.50	22.10

Specifications:

Current rating: 1A AC,DC

Voltage rating: 50V AC,DC

Contact resistance: 20m ohm.Max

Insulation resistance: 100M ohm.Min

Withstanding voltage: 500V AC/minute

Operating temperature range: -40°C~+105°C

Material:

Insulator:High Temp. Plastic(LCP UL94V-0)




Color:Ivory

Terminal:Brass




Plated:Matte Tin

Solder Pad:Brass


Plated:Matte Tin

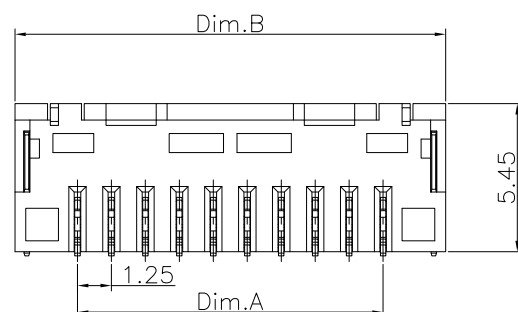

2P to 7P

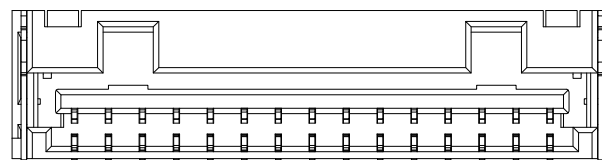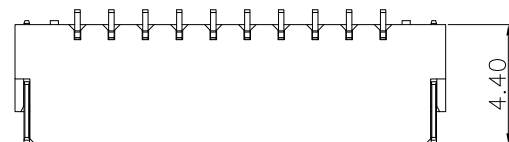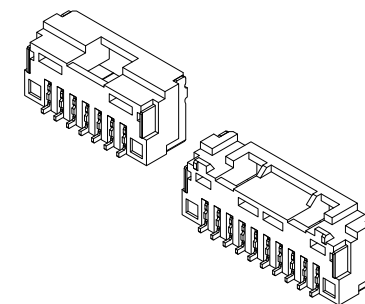

8P to 15P

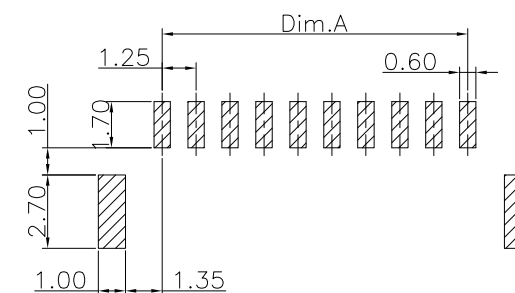

P.C.B Layout

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.20
.XX ± 0.10
.XXX ±
ANG ±

照片框

ORDER INFORMATION

CLM125-WX-1Xxx-LF

SERIES

LEADFREE

1X02:02 WAY

1X15:15 WAY

NON POST

90°SMT

DESCRIPTION: 1.25mm Wafer R/A SMD Type