


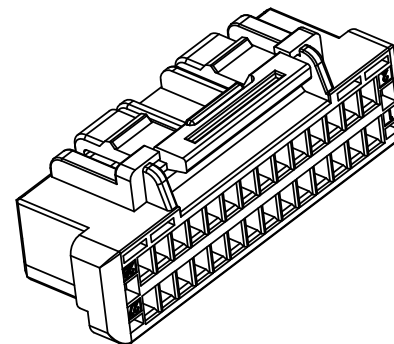

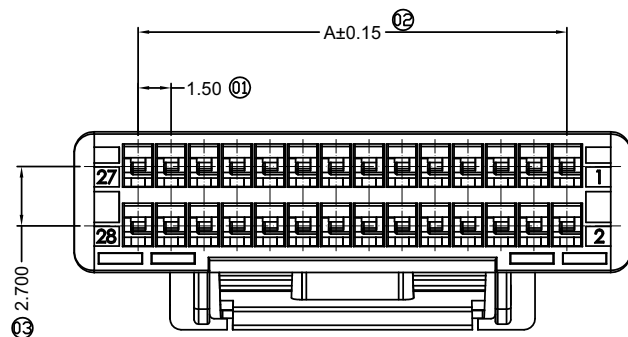


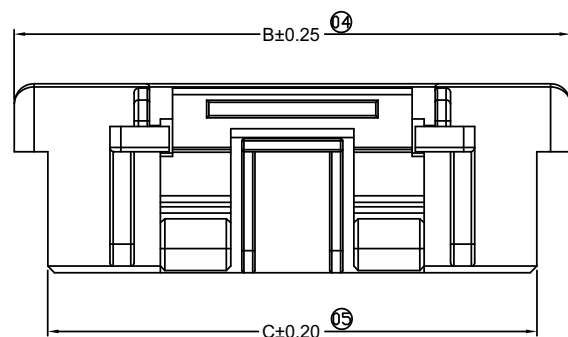


- Specifications :
- Voltage rating: 100V AC / DC
 - Current rating: 1.5A AC / DC
 - Withstanding voltage: 500V AC/minute
 - Temperature range: -40°C~+105°C
 - Insulation resistance: $\geq 500M\Omega$
 - Contact resistance: $\leq 20m\Omega$
 - After environmental testing: $\leq 40m\Omega$
 - Suitable SESOTerminal: 1515T





2*06P~2*14P Shape
Scale 1:1

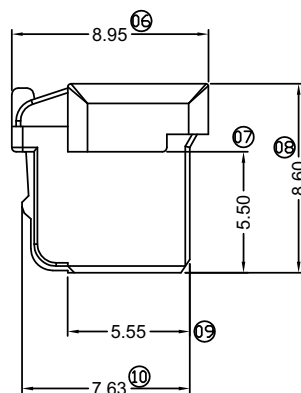

Poles	Dimensions (mm)			Poles	Dimensions (mm)		
	A	B	C		A	B	C
2*04	4.50	10.30	7.25	2*10	13.50	19.30	16.25
2*05	6.00	11.80	8.75	2*11	15.00	20.80	17.75
2*06	7.50	13.30	10.25	2*12	16.50	22.30	19.25
2*07	9.00	14.80	11.75	2*13	18.00	23.80	20.75
2*08	10.50	16.30	13.25	2*14	19.50	25.30	22.25
2*09	12.00	17.80	14.75				

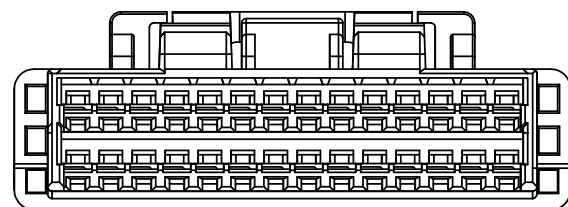

2*06~2*09P 视图
比例 1:1

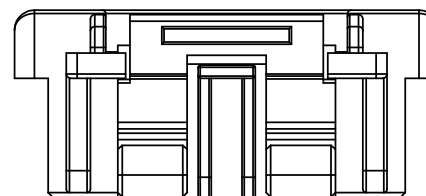

2*10~2*14P 视图
比例 1:1

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ± 2°

ORDER INFORMATION

CLM15-H-2Xxx-LF

SERIES

LEADFREE

2X04:08WAY

2X14:28WAY

HOUSING

DESCRIPTION: 1.50mm Crimp Style Connectors