

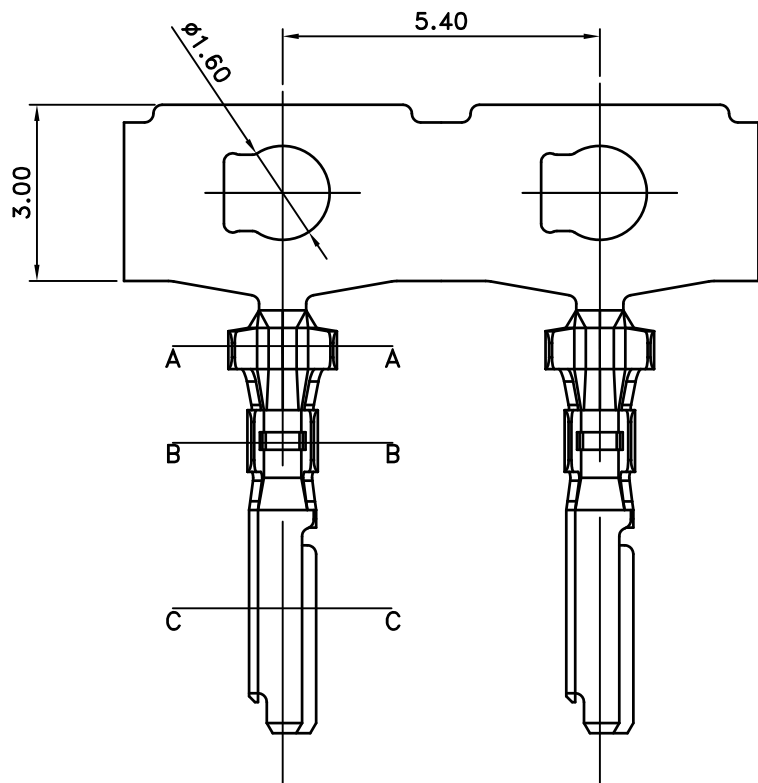



SEC.A-A

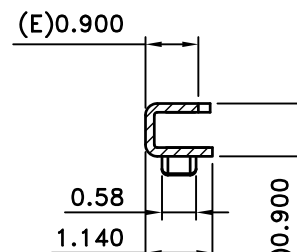

SEC.B-B

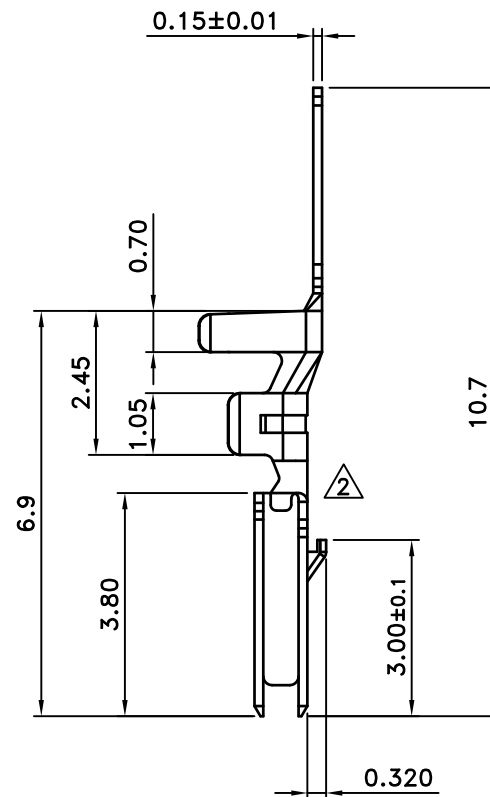


SEC.C-C

■ SPECIFICATIONS

- Material: Phosphor Bronze
- Wire Range: CLM15-T-26 AWG #26~#30
Insulation O.D.: 0.7mm~1.02mm
- CLM15-T-24 AWG #24~#28
Insulation O.D.: 0.78mm~1.28mm

- Plated: Tin (Pre-Plated)
- Q'ty: 15,000 Pcs/Reel

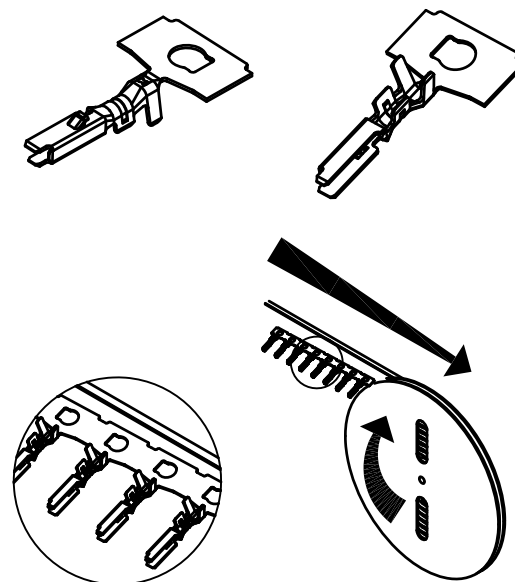

	A	B	C	D
CLM15-T-26	1.75	1.80	1.20	1.20
CLM15-T-24	1.85	2.10	1.20	1.35

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±

.X ± 0.30

.XX ± 0.20

.XXX ± 0.10

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

CLM15-T-xx-LF

SERIES

LEADFREE

26:26~30AWG

24:24~28AWG

TERMINAL

DESCRIPTION: