

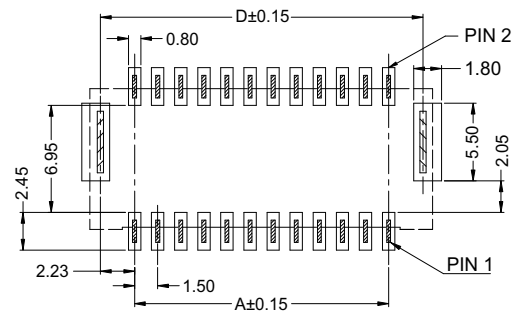


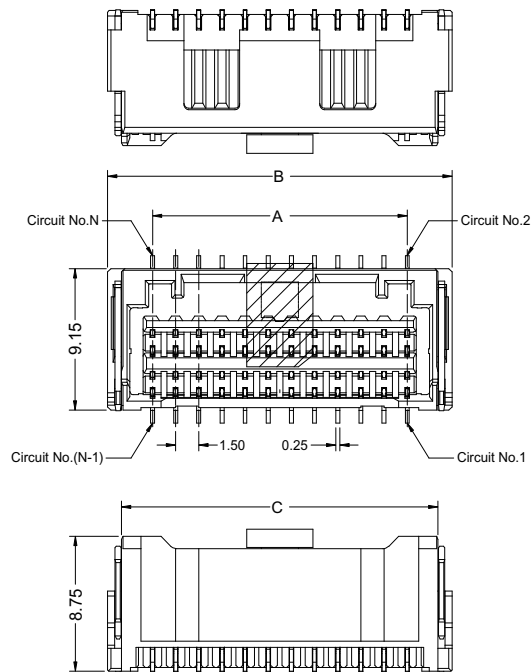


RECOMMENDED P.C.B LAYOUT
(TOLERANCE:±0.05)



■ Specifications :

- Voltage rating: 100V AC / DC
- Current rating: 1.5 AC / DC
- Withstanding voltage: 500V AC/minute
- Temperature range: -40°C~+105°C
- Insulation resistance:≥500MΩ
- Contact resistance: ≤20mΩ
- After environmental testing: ≤40mΩ



Poles	Dimensions (mm)				Poles	Dimensions (mm)			
	A	B	C	D		A	B	C	D
2*04	4.50	10.30	8.50	8.95	2*11	15.00	20.80	19.00	19.45
2*05	6.00	11.80	10.00	10.45	2*12	16.50	22.30	20.50	20.95
2*06	7.50	13.30	11.50	11.95	2*13	18.00	23.80	22.00	22.45
2*07	9.00	14.80	13.00	13.45	2*14	19.50	25.30	23.50	23.95
2*08	10.50	16.30	14.50	14.95					
2*09	12.00	17.80	16.00	16.45					
2*10	13.50	19.30	17.50	17.95					

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ± 2°

照片框

ORDER INFORMATION

CLM15-VXC-2Xxx-LF

SERIES

180°SMT

CAP


NON POST

LEADFREE


2X04:08WAY

2X14:28WAY


DESCRIPTION:






2*04P~2*05P Shape
Scale 1:1



2*06P~2*09P Shape
Scale 1:1

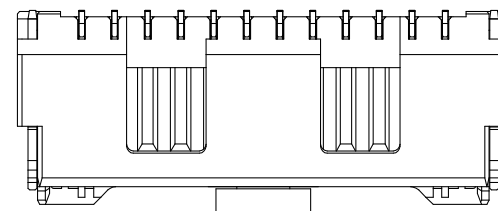

2*10P~2*14P Shape
Scale 1:1

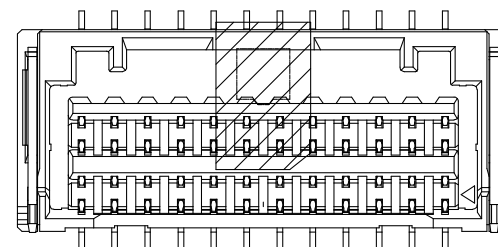

照片框

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

TOLERANCES ARE

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ± 2°

PPOJECTION

ORDER INFORMATION

CLM15-VXC-2Xxx-LF

SERIES

LEADFREE

2X04:08WAY

2X14:28WAY

180°SMT

CAP
NON POST

DESCRIPTION: