

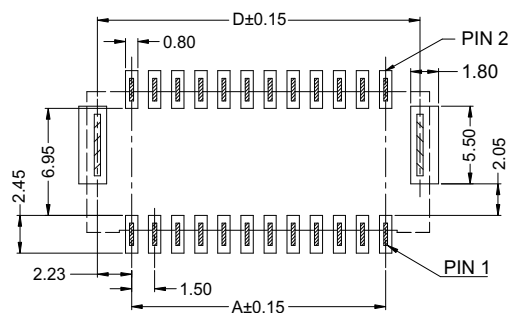
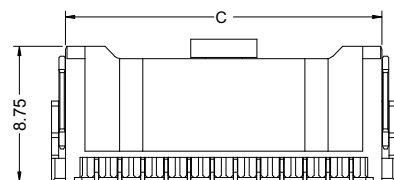


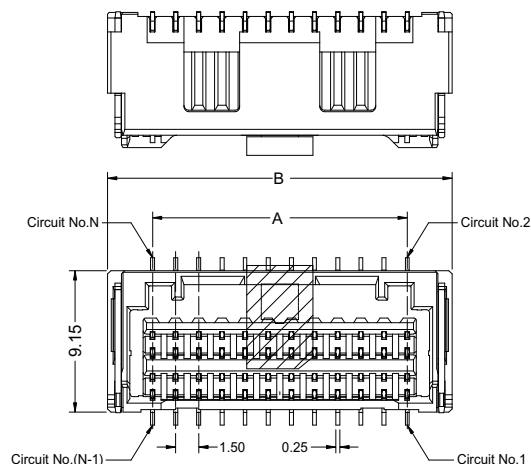


RECOMMENDED P.C.B LAYOUT
(TOLERANCE:±0.05)



■ Specifications :

- Voltage rating: 100V AC / DC
- Current rating: 1.5 AC / DC
- Withstanding voltage: 500V AC/minute
- Temperature range: -40°C~+105°C
- Insulation resistance:≥500MΩ
- Contact resistance: ≤20mΩ
- After environmental testing: ≤40mΩ



Poles	Dimensions (mm)				Poles	Dimensions (mm)			
	A	B	C	D		A	B	C	D
2*04	4.50	10.30	8.50	8.95	2*11	15.00	20.80	19.00	19.45
2*05	6.00	11.80	10.00	10.45	2*12	16.50	22.30	20.50	20.95
2*06	7.50	13.30	11.50	11.95	2*13	18.00	23.80	22.00	22.45
2*07	9.00	14.80	13.00	13.45	2*14	19.50	25.30	23.50	23.95
2*08	10.50	16.30	14.50	14.95					
2*09	12.00	17.80	16.00	16.45					
2*10	13.50	19.30	17.50	17.95					

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ± 2°

照片框

ORDER INFORMATION

CLM15-VXCR-2Xxx-LF

SERIES

180°SMT

REEL

CAP


NON POST

LEADFREE


2X04:08WAY

2X14:28WAY


DESCRIPTION:






2*04P~2*05P Shape
Scale 1:1



2*06P~2*09P Shape
Scale 1:1

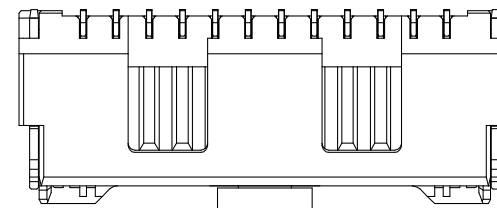

2*10P~2*14P Shape
Scale 1:1

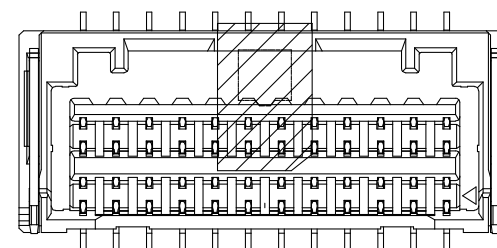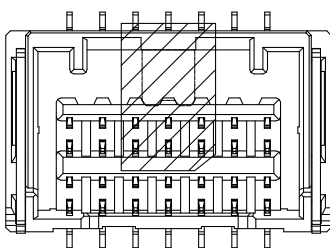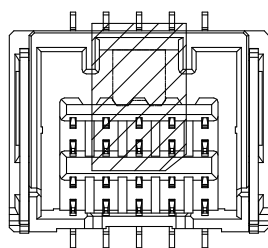

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ± 2°

PPOJECTION

ORDER INFORMATION

CLM15-VXCR-2Xxx-LF

SERIES



LEADFREE

2X04:08WAY
2X14:28WAY

180°SMT



REEL
CAP
NON POST

DESCRIPTION:

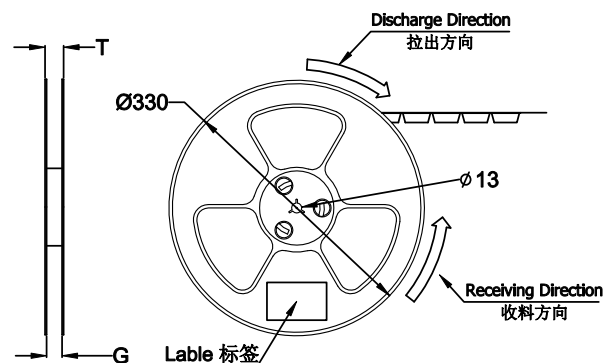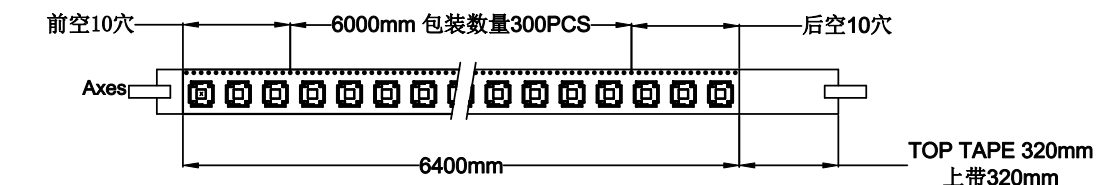




Single hole: None Hole Side
单孔: 贴无链孔侧

Double hole: Elliptical Hole Side
双孔: 贴椭圆孔侧

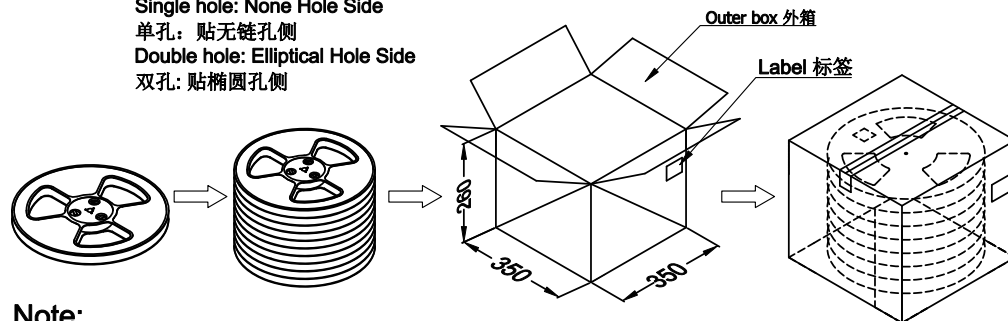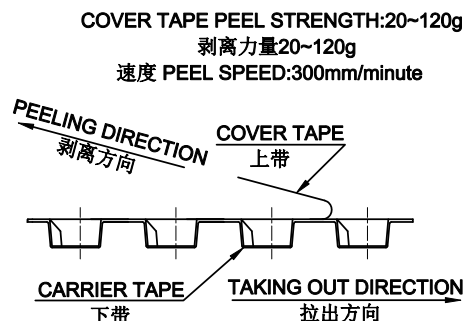

Note:

- Carrier Camber Is Within 1mm In 100mm; 带长100mm内容许弯曲度1mm
- 10 Sprocket Hole Pitch Cumulative Tolerance $\pm 0.2\text{MM}$; 圆孔十个孔距距离累计允许公差为 $\pm 0.2\text{mm}$
- Carrier tape Material for PS; 下带材质为PS材质; Color颜色: Natural透明色
- Bracer保护带: Color颜色: Natural透明色; 厚度0.40mm最小;
- Thickness $= 0.50 \pm 0.05$; 材料厚度为 $0.50 \pm 0.05\text{mm}$
- Carton material 纸箱材质: K=K; Carton Thickness 纸箱厚度: 6~7mm

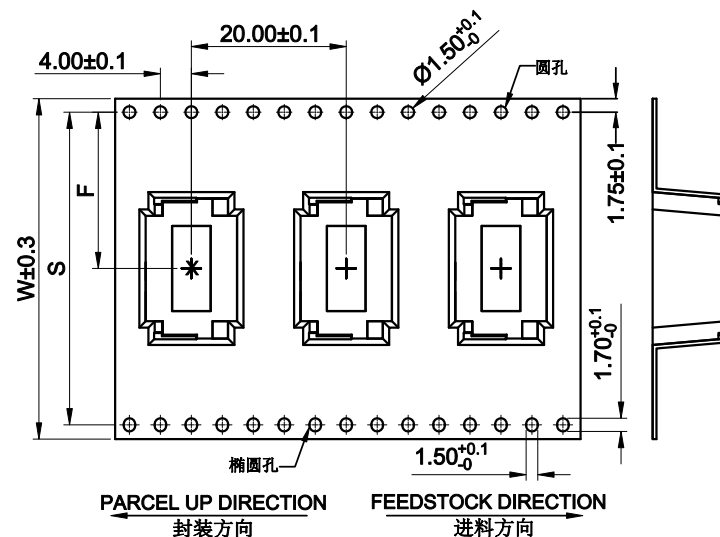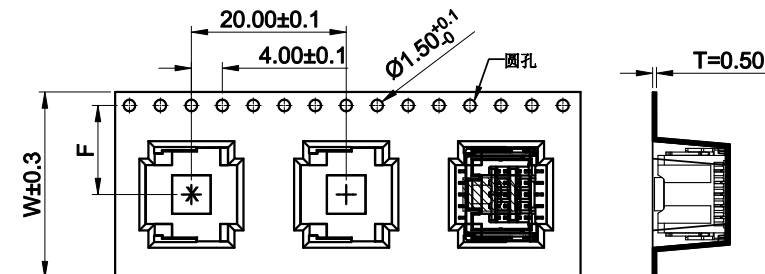

Carrier Tape No. 载带料号	W	S	F	T	G	Cover Tape(W) 上带(宽度)	REEL 卷/PCS	CARTON 箱/R	CARTON 箱/PCS
CLM15-VXCR-2X04 ~ CLM15-VXCR-2X05	24	-	11.5	28.50	24.50	21.3	300	8R	2400
CLM15-VXCR-2X06 ~ CLM15-VXCR-2X08	32	28.4	14.2	36.50	32.50	25.5		7R	2100
CLM15-VXCR-2X09 ~ CLM15-VXCR-2X14	44	40.4	20.2	48.50	44.50	37.5		5R	1500

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X, $\pm$
X ± 0.35
XX ± 0.25
XXX ± 0.15
ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

CLM15-VXCR-2Xxx-LF

SERIES
180°SMT
REEL
CAP
NON POST
LEADFREE
2X04:08WAY
2X14:28WAY

DESCRIPTION: Pitch 1.50 mm 180° Wafer Connectors Packing