



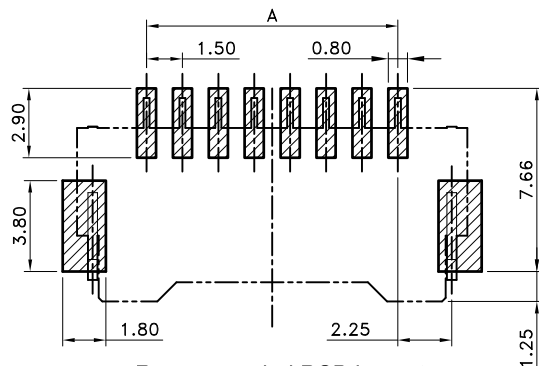

Recommended PCB Layout
General Tolerance ± 0.05

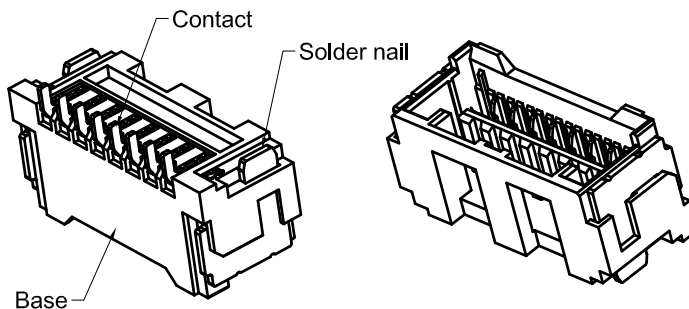

3D View

SPECIFICATIONS

- Current Rating : 2A AC/DC
- Voltage Rating : 100V AC/DC
- Withstanding Voltage : 500V AC/minute
- Insulation Resistance : 500M Ω min.
- Temperature Range : -40 $^{\circ}$ C to +85 $^{\circ}$ C
- Contact Resistance : 20m Ω max.

- Material : 1. Contact : Phos. Bronze
- 2. Base : PA6T UL 94V-0
- 3. Solder nail : Brass
- Qt'y : 800 Pcs / Reel

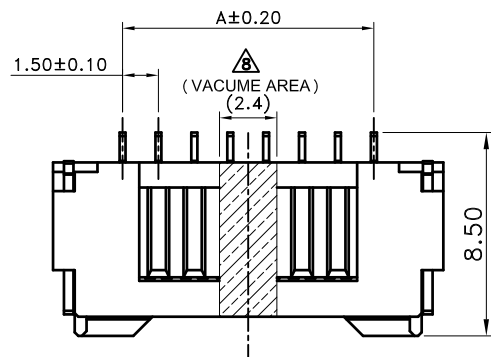


Figure of 6~15 Circuit




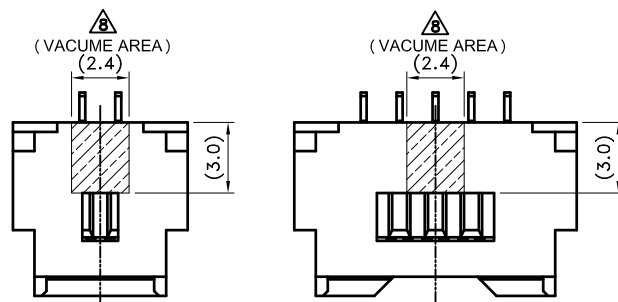


Figure of 2~5 Circuit

Poles	Dimension(mm)		Poles	Dimension(mm)	
	A	B		A	B
2	1.50	7.30	9	12.00	17.80
3	3.00	8.80	10	13.50	19.30
4	4.50	10.30	11	15.00	20.80
5	6.00	11.80	12	16.50	22.30
6	7.50	13.30	13	18.00	23.80
7	9.00	14.80	14	19.50	25.30
8	10.50	16.30	15	21.00	26.80

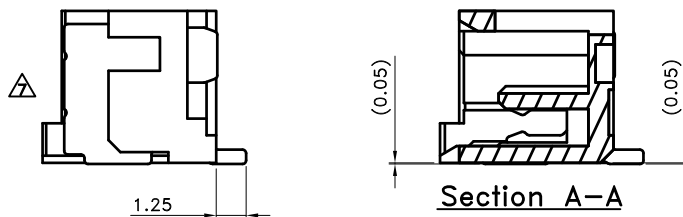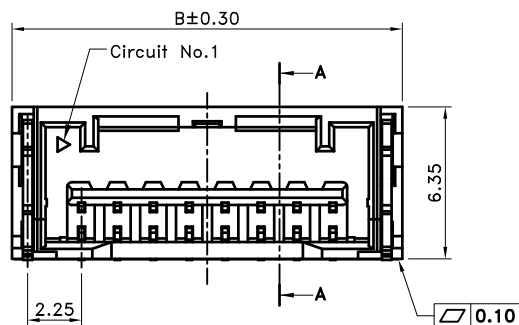

Section A-A

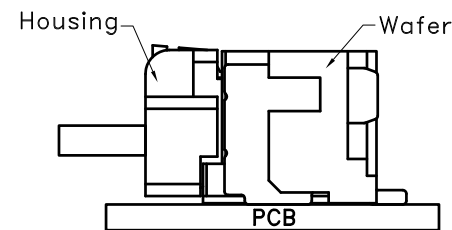

Mated Connectors

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, $\pm$
.X $\pm$ 0.30
.XX $\pm$ 0.20
.XXX $\pm$ 0.10
ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

CLM15-WX-1Xxx-LF

SERIES

LEADFREE

1X02:02WAY

1X15:15WAY

NON POST

90 $^{\circ}$ SMT

DESCRIPTION: