
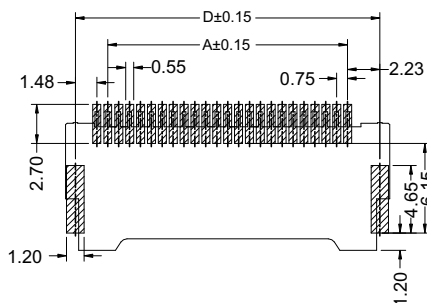

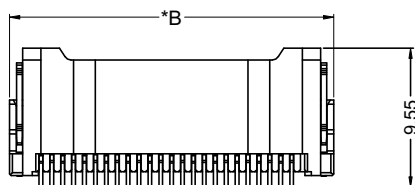



2*04 PIN
2*05 PIN

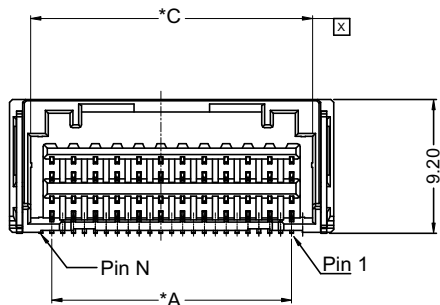

RECOMMENDED P.C.B LAYOUT
(TOLERANCE:±0.05)

Specifications :

- Voltage rating: 100V AC / DC
- Current rating: 1.5A AC/DC
- Withstanding voltage: 500V AC/minute
- Temperature range: -40°C~+105°C
- Insulation resistance: ≥500MΩ
- Contact resistance: ≤20mΩ
- After environmental testing: ≤40mΩ



CLM15-WXC-2Xxx	LCP UL 94V-0	Phosphor Bronze	Brass	Matte Tin-Plated
PART NO	Material	Material(Pin)	Material (Solder Tabs)	Finish (Pin And Solder Tabs)

Poles	Dimensions (mm)				Poles	Dimensions (mm)			
	A	B	C	D		A	B	C	D
04	4.50	10.30	7.40	8.95	11	15.00	20.80	17.90	19.45
05	6.00	11.80	8.90	10.45	12	16.50	22.30	19.40	20.95
06	7.50	13.30	10.40	11.95	13	18.00	23.80	20.90	22.45
07	9.00	14.80	11.90	13.45	14	19.50	25.30	22.40	23.95
08	10.50	16.30	13.40	14.95					
09	12.00	17.80	14.90	16.45					
10	13.50	19.30	16.40	17.95					

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ± 2°

PPOJECTION

照片框

ORDER INFORMATION

CLM15-WXC-2Xxx-LF

SERIES


180°SMT

CAP


NON POST

LEADFREE
2X04:08WAY
2X14:28WAY


DESCRIPTION:






2*04P~2*05P Shape
Scale 1:1



2*06P~2*09P Shape
Scale 1:1

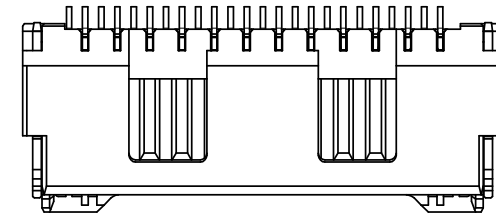

2*10P~2*14P Shape
Scale 1:1

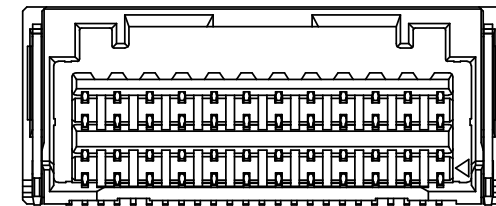

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

TOLERANCES ARE

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ± 2°

PPOJECTION

照片框

ORDER INFORMATION

CLM15-WXC-2Xxx-LF

SERIES

LEADFREE

2X04:08WAY

2X14:28WAY

180°SMT

CAP
NON POST

DESCRIPTION: