


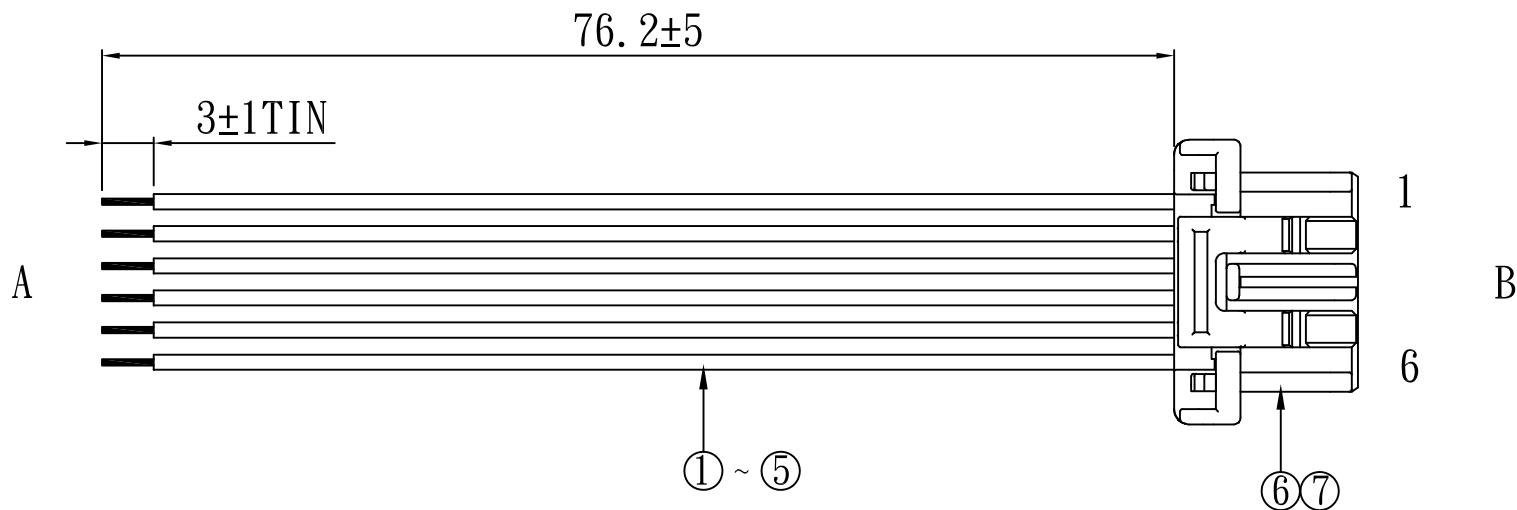

WIRING CHART

A	COLOR	B
TIN	WHITE	1
TIN	WHITE	2
TIN	BLACK	3
TIN	RED	4
TIN	ORANGE	5
TIN	PURPLE	6

NOTES:

1. ALL DIMENSIONS ARE "mm".
2. THE PRODUCT MUST BE COMPLY WITH THE DIRECTIVE OF ROHS.

ELECTRICAL TESTING:

1. 100% OPEN/SHORT TEST
2. CONTACT RESISTANCE: 5mΩ
3. INSULATION RESISTANCE: 5MΩ Min

NO.	ITEM.	DESCRIPTION	Q'TY	UL/CSA No.
1	WIRE:	UL1213 #24 WHITE (SIL VER)	2PCS	E252458 OR EQ
2	WIRE:	UL1213 #24 BLACK (SIL VER)	1PCS	E252458 OR EQ
3	WIRE:	UL1213 #24 RED (SIL VER)	1PCS	E252458 OR EQ
4	WIRE:	UL1213 #24 ORANGE (SIL VER)	1PCS	E252458 OR EQ
5	WIRE:	UL1213 #24 PURPLE (SIL VER)	1PCS	E252458 OR EQ
6	HOUSING:	CLM15-H-1X06	1PCS	
7	TERMINAL:	CLM15-T-24	6PCS	

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

CLM15X1-060024-F3N-LF

SERIES

LEADFREE
76.2mm
FEMALE
24 AWG
06 WAY

DESCRIPTION: CABLE ASS"Y