


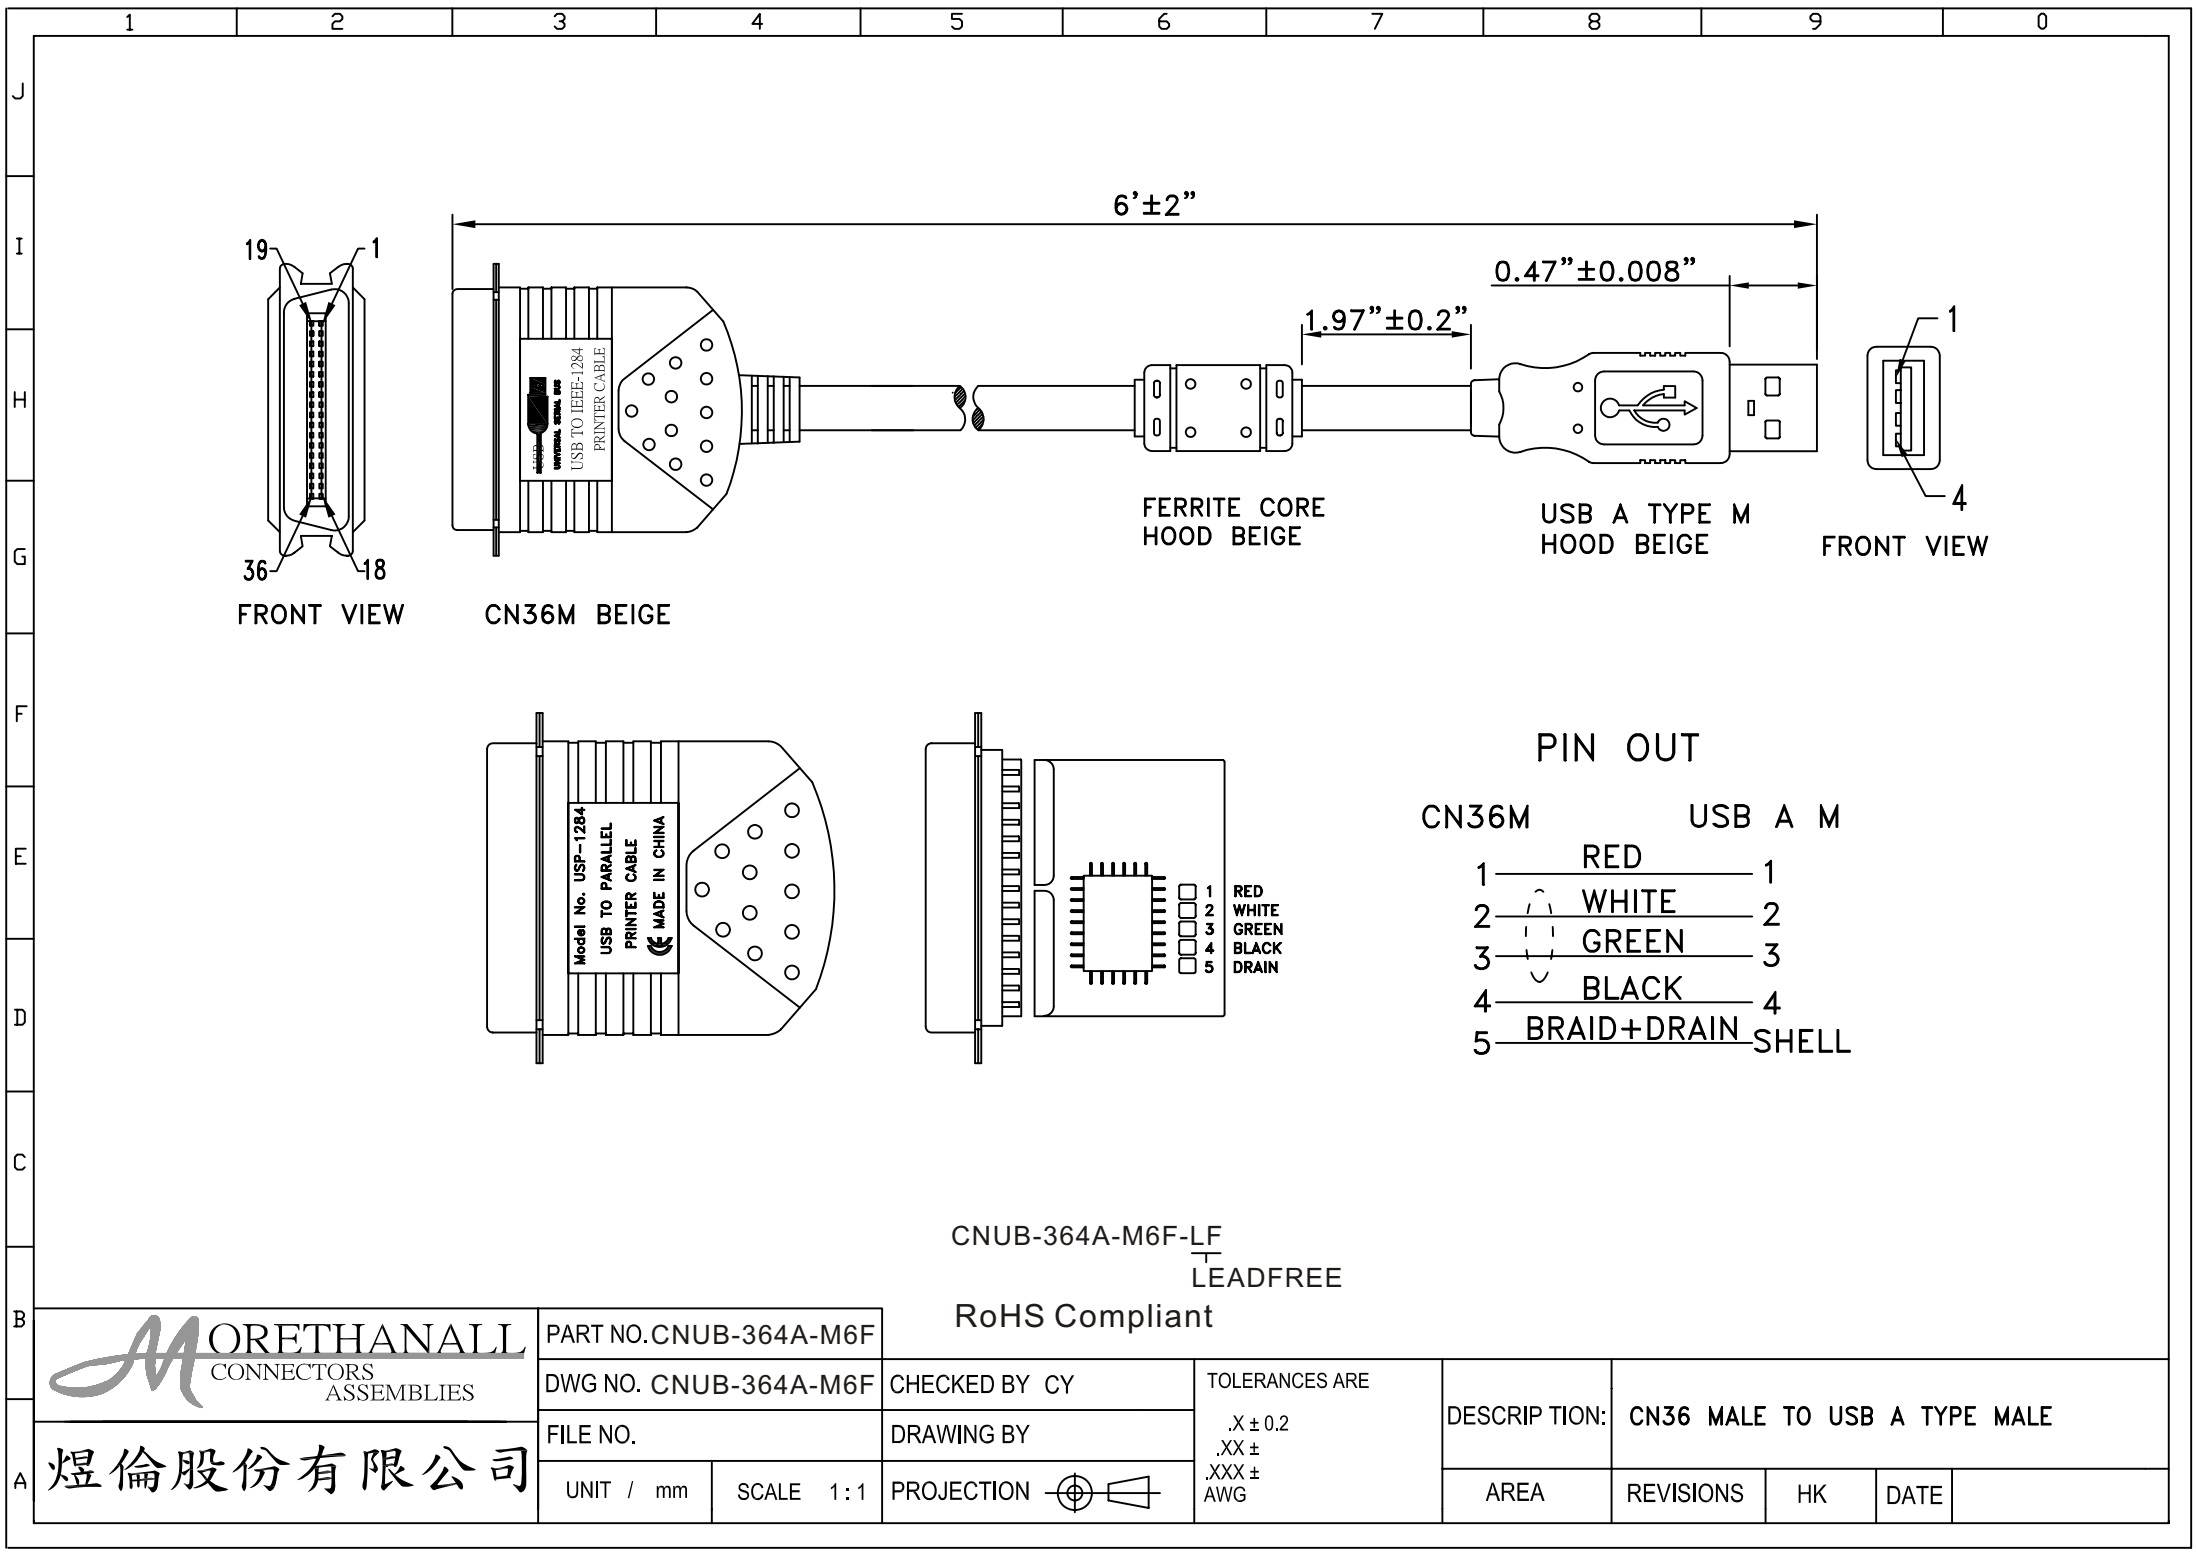

CNUB-364A-M6F-LF

LEADFREE

RoHS Compliant

J

I

H

G

F

E

D

C

B

A

***CONSTRUCTION:

1.CABLE: * UL2725 28AWG*1P+24AWG*2C+AEB OD:4.7mm BEIGE JACKET.

***CONNECTORS:

2.USB A/M: * USB A TYPE MALE CRIMPING TYPE.
* PINS: GOLD PLATED OVER NICKEL.
* INSULATOR: WHITE COLOR P.B.T UL 94V-0 RATED.
* SHELL: STEEL WITH GOLD PLATED.
* MOLDED: BEIGE PVC 45P.

3.CN36 MALE * CENTRONIC 36PIN MALE SOLDER TYPE.
* PINS: GOLD PLATED OVER NICKEL.
* INSULATOR: BLUE COLOR P.B.T UL 94V-0 RATED.
* SHELL: STELL WITH NICKEL PLATED.
* SHIELDED: 360° COPPER-FOIL SHIELDED AND SOLDER.
* MOLDED: BEIGE PVC 45P.

4.FERRITE CORE: * RH: OD:10.5mm*ID:5.5mm*20mm, BEIGE PVC 45P MOLDED.

5.LABLE: * PRINT:  PRINT: Model No. USP-1284
USB TO IEEE-1284 USB TO PARALLEL
PRINTER CABLE PRINTER CABLE
 MADE IN CHINA

6.TEST: * CT: 2 ohm IS: 5M ohm.

7.PACKING: * PACK EACH CABLE IN VACUUM-MANTLE WITH HEAT SEALED.

8.MATERIAL: * MATERIAL WITH RoHS GRADE.



PART NO. CNUB-364A-M6F								
DWG NO. CNUB-364A-M6F		CHECKED BY CY	TOLERANCES ARE .X ± 0.2 .XX ± .XXX ± AWG	DESCRIP TION:				
FILE NO.		DRAWING BY						
UNIT / mm	SCALE 1:1	PROJECTION 		AREA	REVISIONS	HK	DATE	

煜倫股份有限公司