

NOTES:

MATERIAL:



1. HOUSING: PBT
 2. TERMINAL: PHOSPHOR BRONZE T=0.20mm
 3. LATCH: SUS301 HV340±20(No Planting)
- PLATING: 50~80U" NI UNDER PLATE
All over, 120~150U" Sn
IN TAIL AREA. MIN 3U"GOLD
PLATED IN CONTACT AREA

ELECTRICAL SPECIFICATION:

CURRNT RATING: 1A
VOLITAGE RATING: 1000 VAC/60S
DIELECTRIC WITHSTANDING VOLTAGE: 500VAC
INSULATION RESISTANCE: 1000MΩ
CONTACT RESISTANCE: MAX 250 mΩ

ENVIRONMENTAL

OPERATING TEMPERATURE: -20°C TO +70°C
STORAGE TEMPERATURE: -30°C TO +80°C

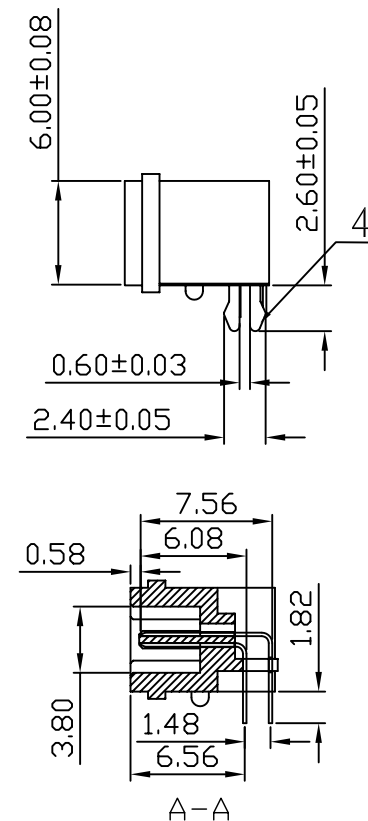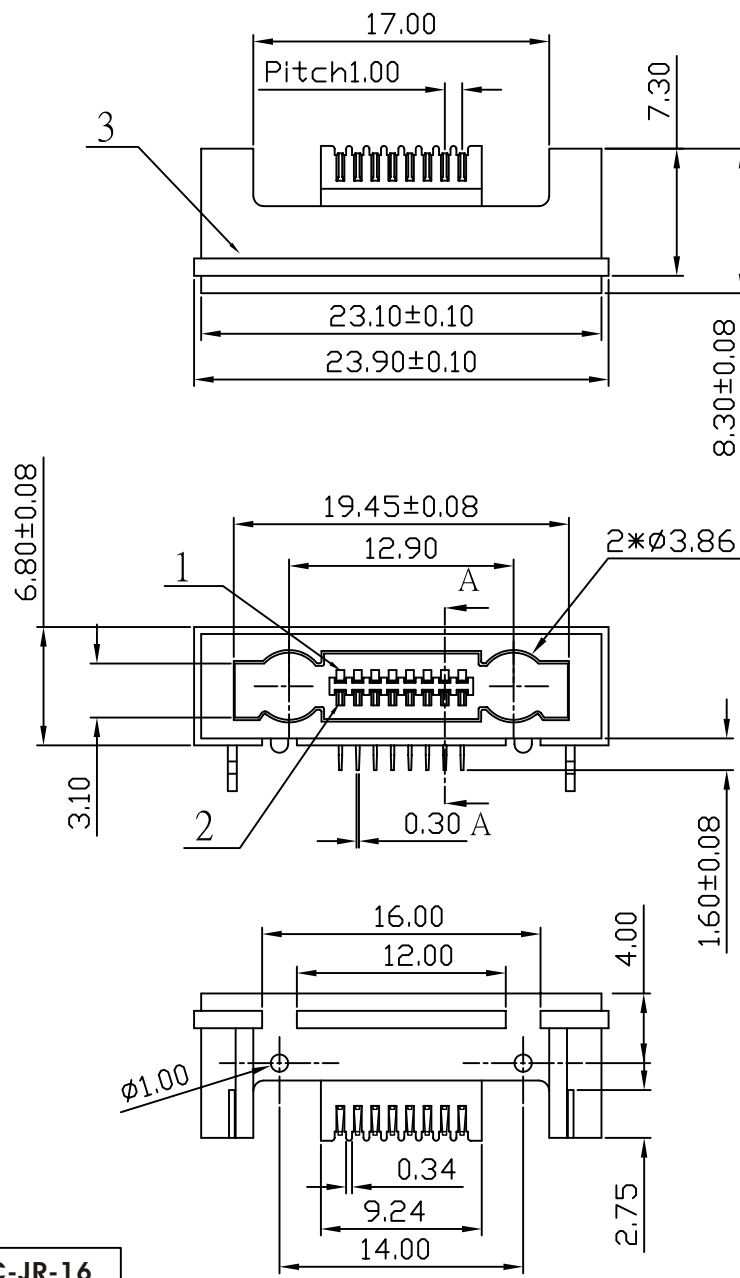

MORETHANALL
CONNECTORS
ASSEMBLIES

煜倫股份有限公司

PART NO. **CPDOC-JR-16**

DWG NO. **CPDOC-JR-16**

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE

.X ± 0.2
.XX ±
.XXX ±
AWG

DESCRIPTION: DOCOMO Socket

AREA

REVISIONS

HK

DATE