
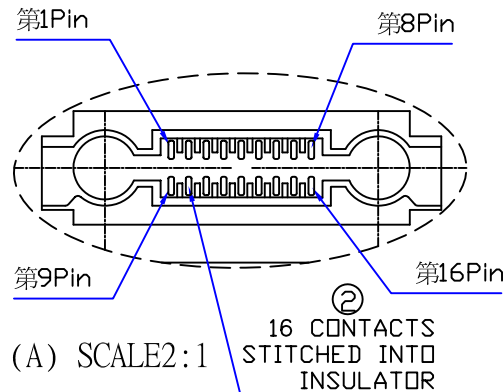


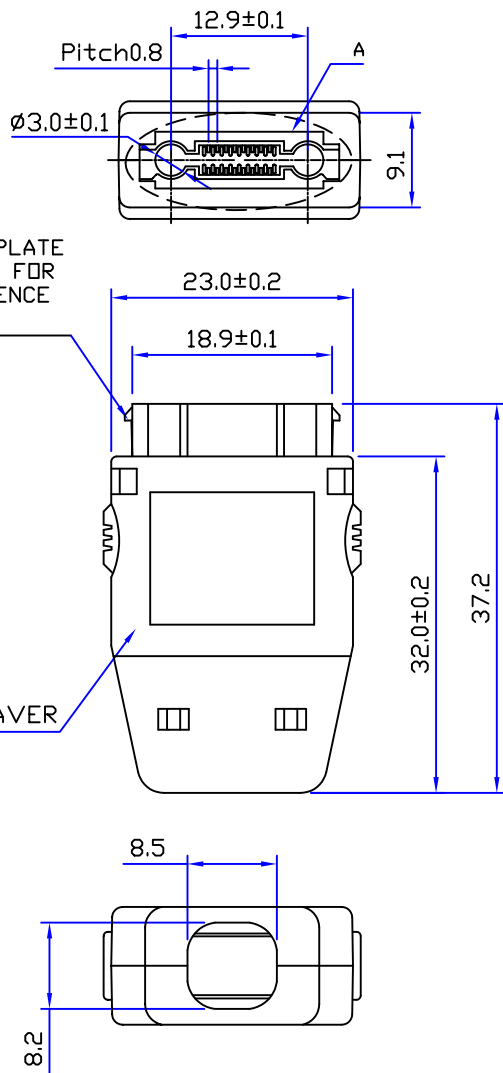



NOTES:

ELECTRICAL SPECIFICATION:

CURRENT RATING: 1.5A
VOLTAGE RATING: 1000 VAC/60S
DIELECTRIC WITHSTANDING VOLTAGE: 500VAC
INSULATION RESISTANCE: 1000M Ω
CONTACT RESISTANCE: MAX 50 m Ω

ENVIRONMENTAL

OPERATING TEMPERATURE: -20°C TO +70°C
STORAGE TEMPERATURE: -30°C TO +80°C

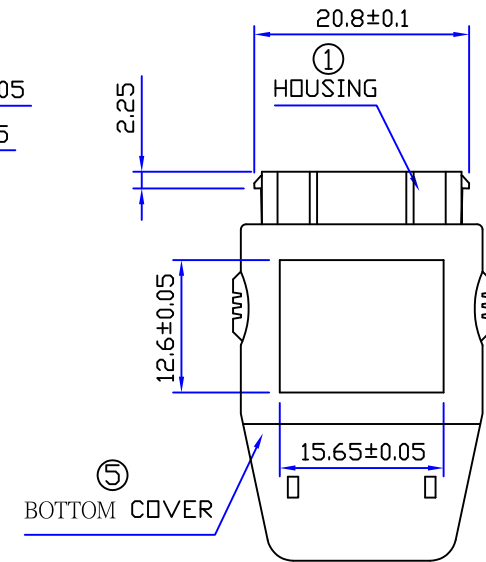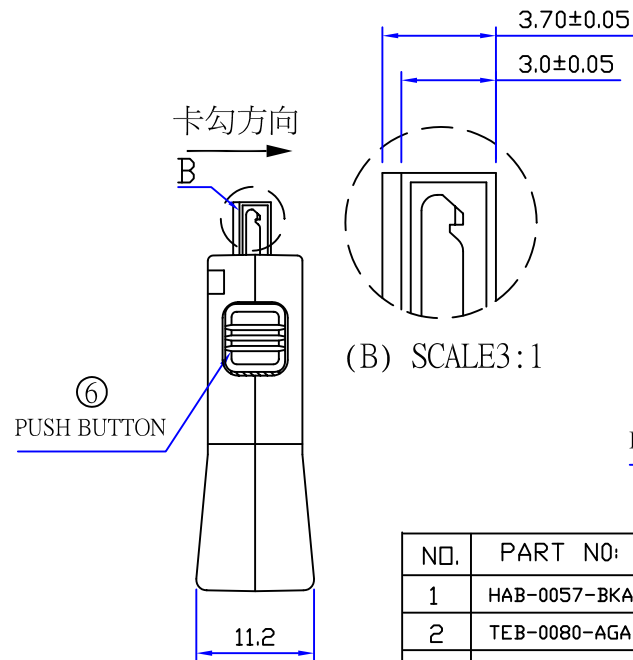

NO.	PART NO:	NAME	MATERIAL	CLCLR	QTY
1	HAB-0057-BKA	HOUSING	PBT	BK	1PCS
2	TEB-0080-AGA	TERMINAL	PHOSPHOR BRONZE	NI/SN/AU	16PCS
3	LEE-0052-Y*A	LATCH (R)	SUS 301	SUS 301	1PCS
3	LEE-0053-Y*A	LATCH (L)	SUS 301	SUS 301	1PCS
4	CAA-0433-BKA	TOP COVER	ABS	BK	1PCS
5	CAA-0434-BKA	BOTTOM COVER	ABS	BK	1PCS
6	BAA-0222BKA	PUSH BUTTON	ABS	BK	2PCS

MORETHANALL
CONNECTORS
ASSEMBLIES

煜倫股份有限公司

PART NO. **CPDOC-PSQ-16**

DWG NO. **CPDOC-PSQ-16**

FILE NO.


UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X $\pm$ 0.2
.XX $\pm$
.XXX $\pm$
AWG

DESCRIPTION:

AREA

REVISIONS

HK

DATE