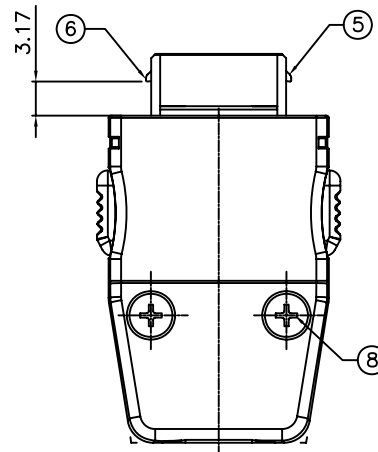
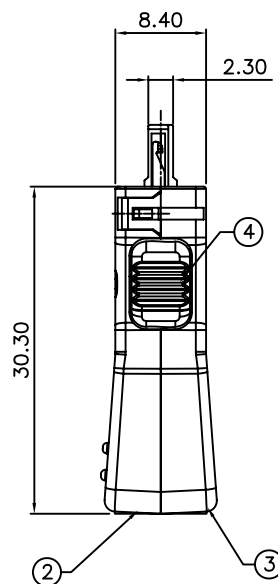
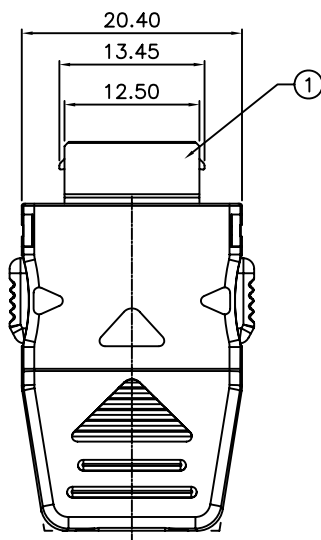



NOTE1

ITEM 項目	PARTS NAME 零件名稱	Q'TY 數量	MATERIAL 材質	FINISH/REMARK 處理/備註
1	HOUSING	1	NYLON	(Black)
2	TOP COVER	1	A.B.S	(Black)
3	BOTTOM COVER	1	A.B.S	(Black)
4	BUTTON	2	A.B.S	GRAY
5	LATCH(R)	1	STAINLESS	Non-plating
6	LATCH(L)	1	STAINLESS	Non-plating
7	CONTACT	18	Phosphor Bronze	Gold flash selective
8	SCREW	2	C1018	-----

SPECIFICATION

MATERIAL

See drawing

STANDARD DATA

Rating current:0.5A

Operating temperature: -30°FXC ~ +60°FXC

Storage temperature: -40°FXC ~ +85°FXC

ELECTRICAL

Insulator resistance: 1000M ohms Min. @ 250 VDC

Withstanding voltage: 100 VAC / minute

Contact resistance: 50 m ohms Max.

MECHANICAL

Mating force: 30N(3.06kgf) Max.

Unmating force (Without lock): 4.2N(0.43kgf) Min.

Durability: 10000 cycles Min.

Contact retention force: 4.2N(0.43kgf) Min

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.50

.X ± 0.30

.XX ± 0.20

.XXX ±

ANG ± 5°

PPOJECTION

照片框

ORDER INFORMATION

CPHRS-PA-18-LF

SERIES

LEADFREE

18 WAY

ASSEMBLY

MALE

DESCRIPTION: PLUG IN CONNECTOR Solder type-18 position