
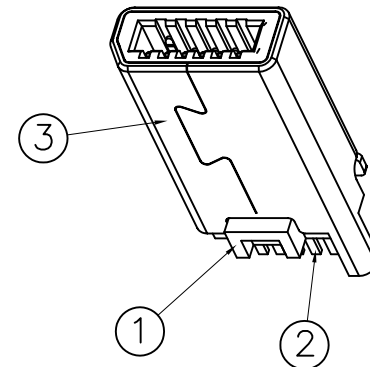
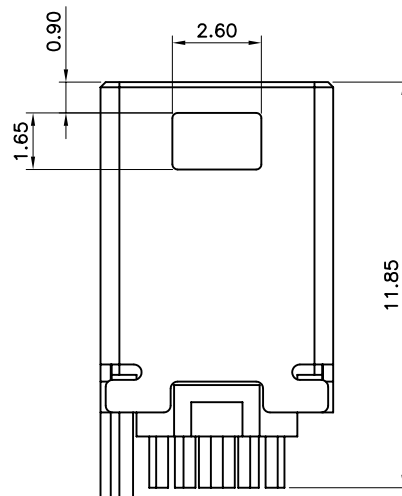
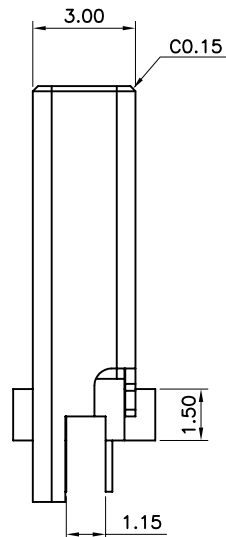
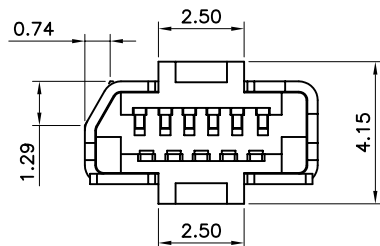
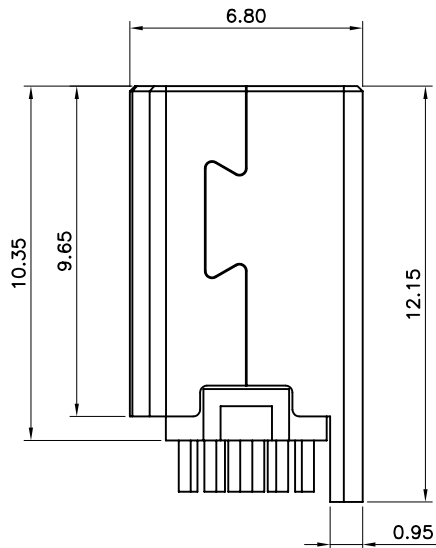




NOTES

1.MATERIAL: See drawing

2.ELECTRICAL

2.1.Insulator resistance: 1000M ohms Min. @ 250 VDC

2.2.Withstanding voltage: 100 VAC / minute

2.3.Contact resistance: 50m ohms Max.

3.MECHANICAL

3.1.Mating force: 30N(3.06kgf) Max.

3.2.Unmating force: 4.2N(0.43kgf) Min.

3.3.Durability: 10000 cycles Min.

3.4.Contact retention force: 4.2N(0.43kgf) Min

CPHTC-PS-11B-LF

LEADFREE

RoHS Compliant

MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO. CPHTC-PS-11B

DWG NO. CPHTC-PS-11B

FILE NO.


UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X ± 0.2

.XX ± 0.1

.XXX ±

AWG

DESCRIP TION:

AREA

REVISIONS

HK

DATE

煜倫股份有限公司