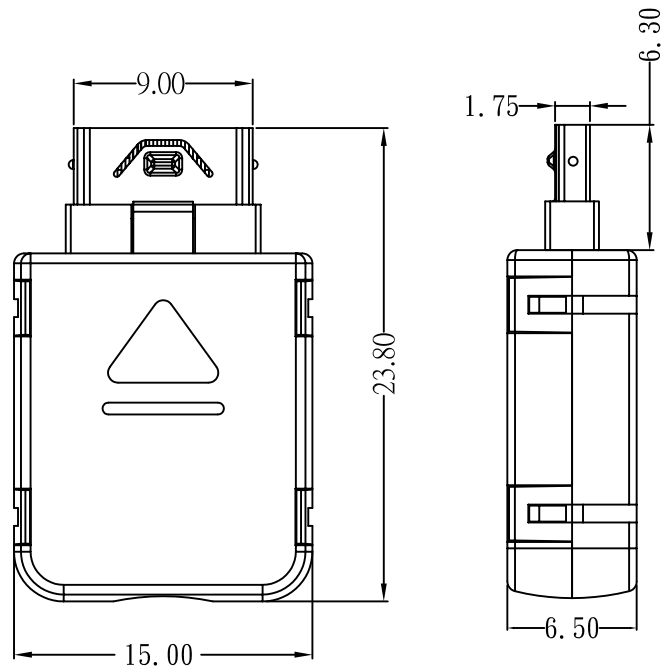
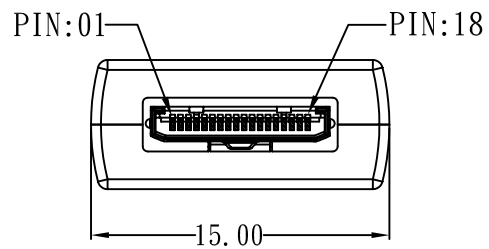


NOTES:

1.ELECTRICAL SPECIFICATION:

CURRENT RATING: 0.5A
VOLTAGE RATING: 100VAC
WITHSTANDING VOLTAGE: MIN 300VAC
INSULATION RESISTANCE: MIN 100MΩ
CONTACT RESISTANCE: MAX 80mΩ

2.ENVIRONMENTAL

OPERATING TEMPERATURE: -15°C TO +85°C
STORAGE TEMPERATURE: -30°C TO +85°C

CPLGC-PA-18-LF
LEADFREE

RoHS Compliant

MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO. CPLGC-PA-18

DWG NO. CPLGC-PA-18

CHECKED BY CY

TOLERANCES ARE

DESCRIP TION: LG-8500-18P仿原(M)

FILE NO.

DRAWING BY

.X ± 0.2
.XX ± 0.1
.XXX ±
AWG

AREA

REVISIONS

HK

DATE


UNIT / mm


SCALE 1:1

PROJECTION



煜倫股份有限公司

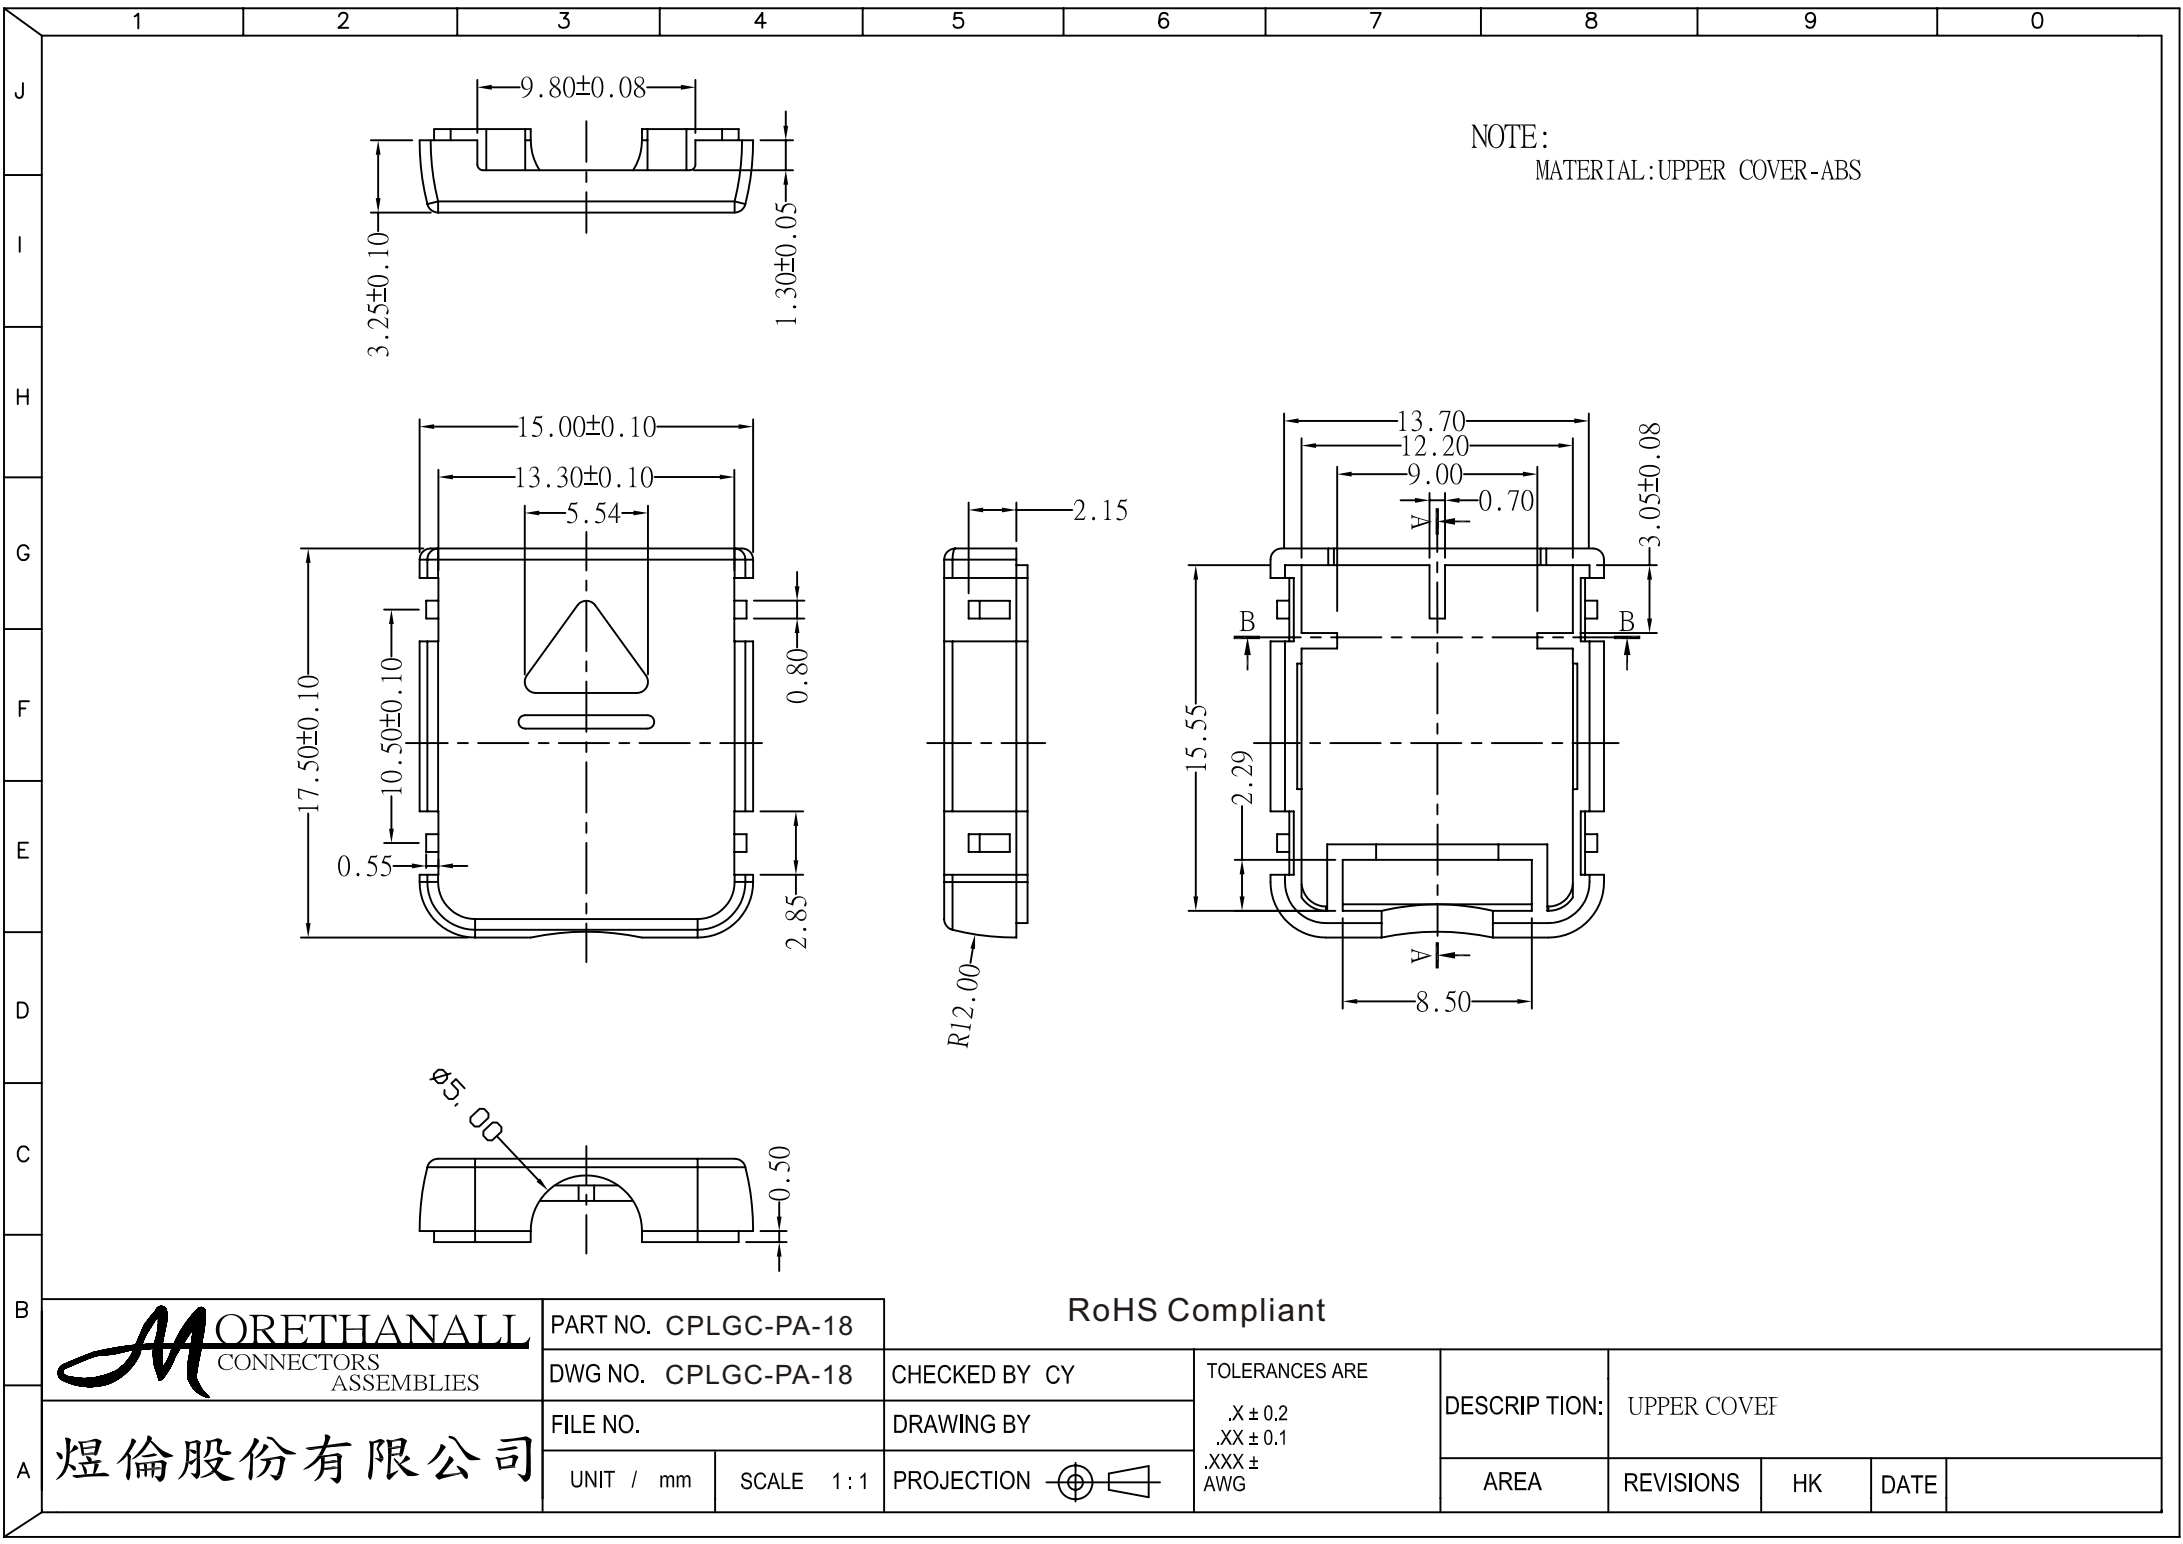

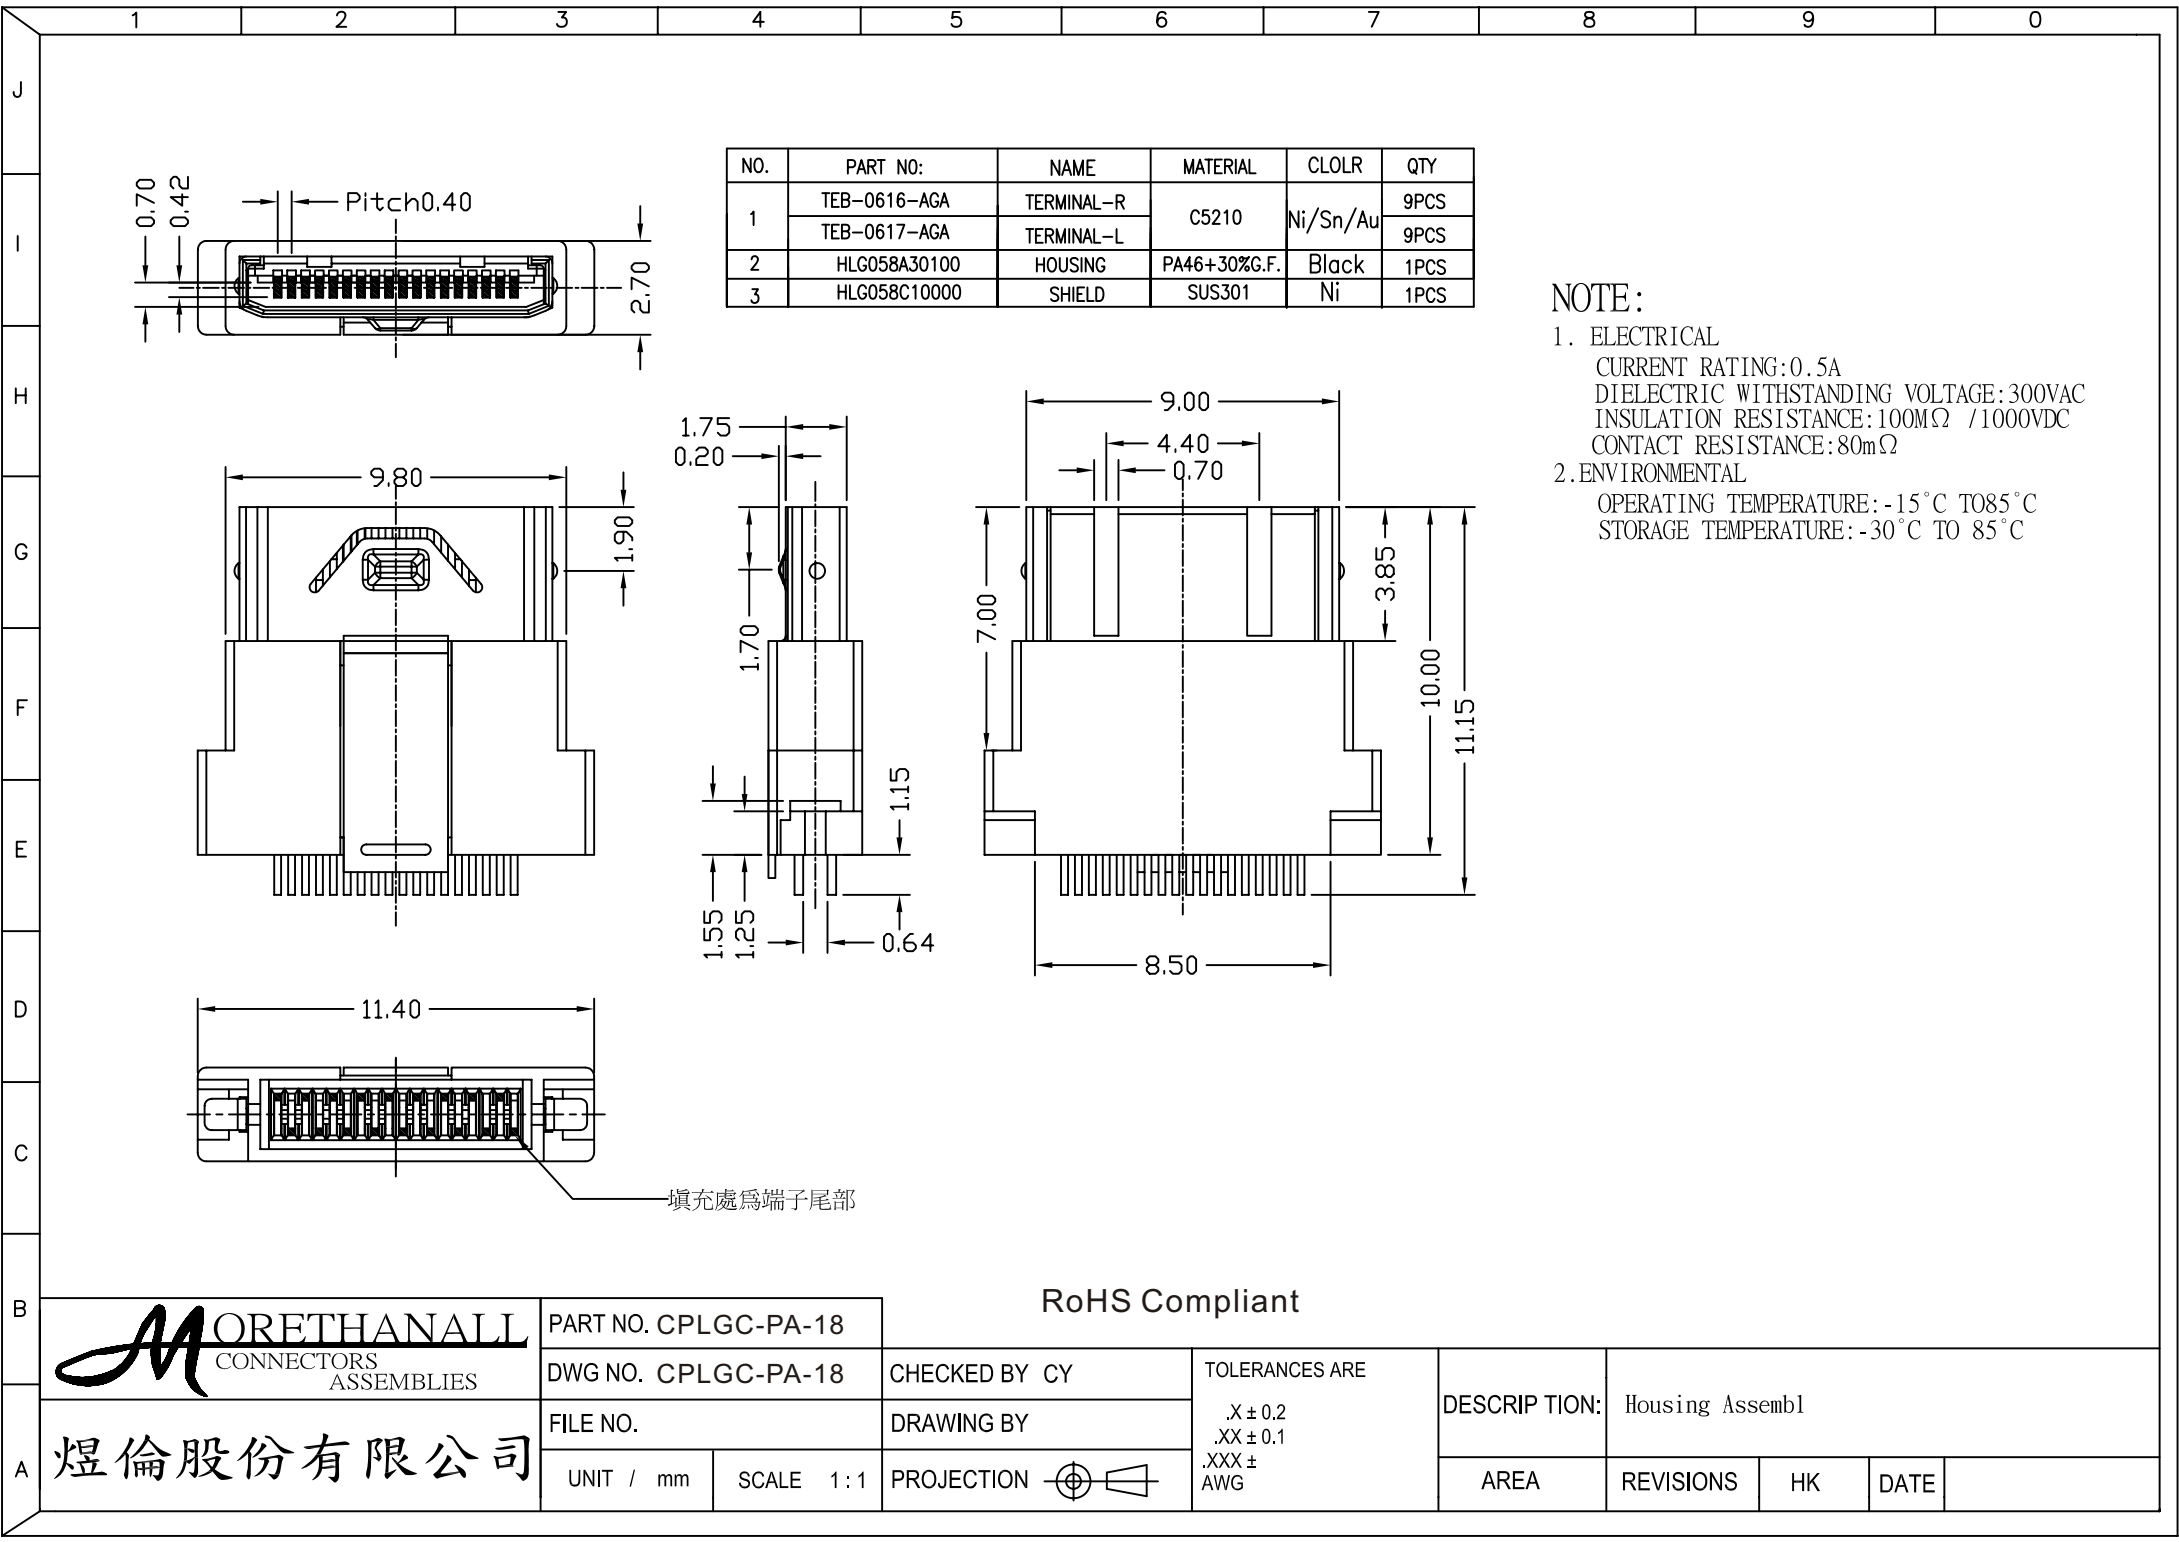

填充處為端子尾部



PART NO. CPLGC-PA-18

DWG NO. CPLGC-PA-18

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION

RoHS Compliant

TOLERANCES ARE

.X ± 0.2
.XX ± 0.1
.XXX ±
AWG

DESCRIPTION: Housing Assembl

AREA

REVISIONS

HK

DATE

煜倫股份有限公司

