
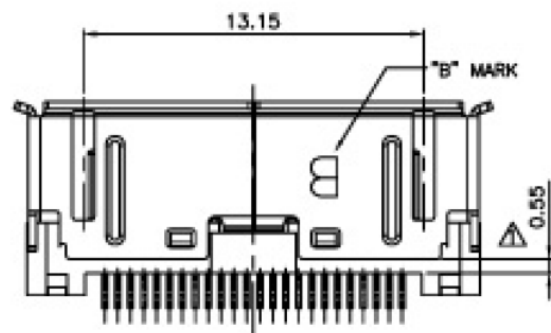
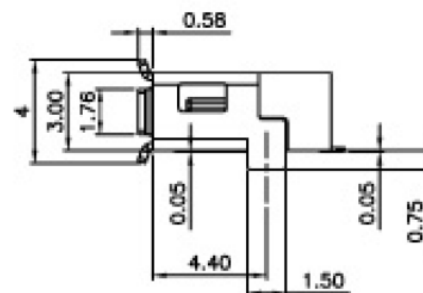
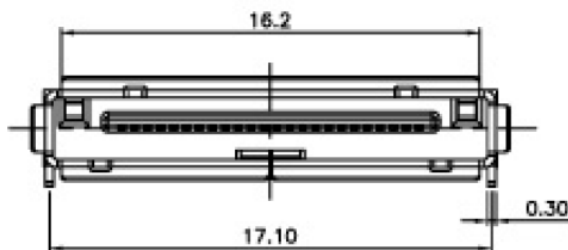
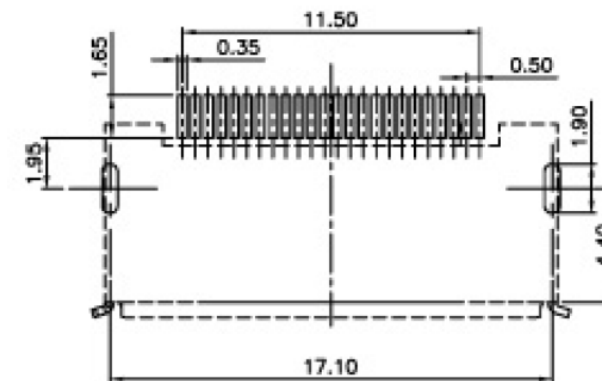
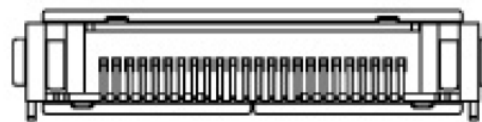


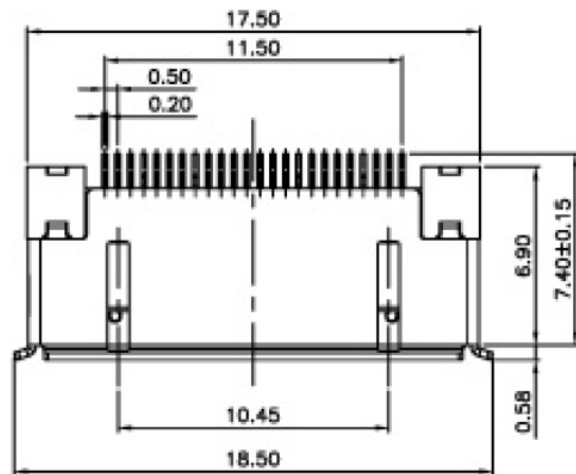

ITEM 項目	PARTS NAME 零件名稱	Q'TY 數量	MATERIAL 材質	FINISH/REMARK 處理/備註
1	HOUSING	1	LCP	UL-94V-0 (Black)
2	SHELL	1	STAINLESS	50u"NICHEL PLATING
3	CONTACT	24	Phosphor Bronze	15u" Gold flash selective

RECOMMENDED P.C. BOARD LAYOUT (TOLERANCE: ±0.03mm)

SPECIFICATION

MATERIAL

See drawing

STANDARD DATA

Rating current: 0.5A

Operating temperature: -30°C ~ +70°C

Storage temperature: -10°C ~ +60°C

ELECTRICAL

Insulator resistance: 1000m ohms Min. @ 250 VDC

Withstanding voltage: 350 VAC / minute

Contact resistance: 50 m ohms

MECHANICAL

Mating force: 30N(3.06kgf) Max.

Unmating force (Without lock): 4.2N(0.43kgf) Min.

Durability: 10000 cycles Min.

Contact retention force: 2.1N(0.21kgf) Min

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

CPMOL-JW-24-LF

SERIES | LEADFREE
24WAY
90°SMT
JACK

DESCRIPTION: