
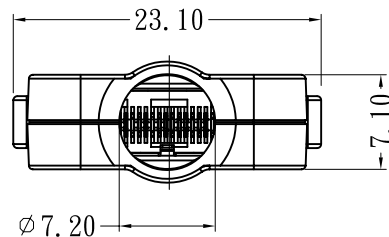
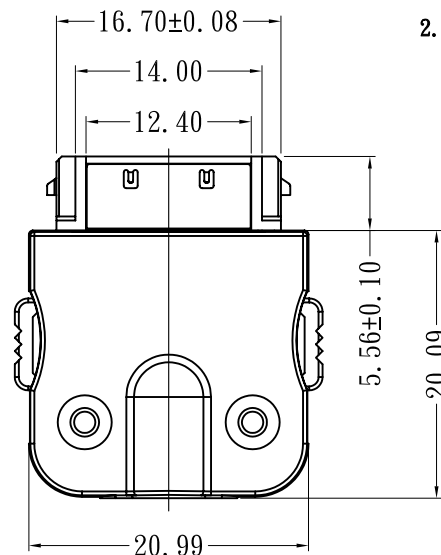
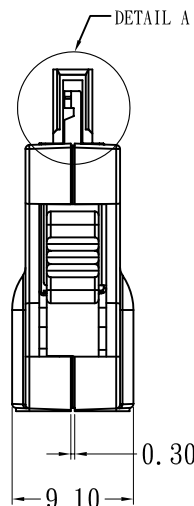
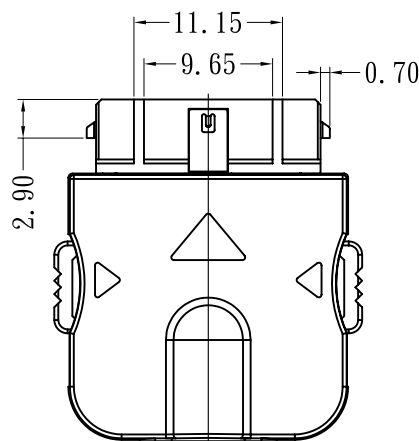


DETAIL A SCALE 2.5:1
注意卡勾装配方向



NOTES:

1. ELECTRICAL SPECIFICATION:

CURRENT RATING: 0.8A
VOLTAGE RATING: 250VAC
DIELECTRIC WITHSTANDING VOLTAGE: MIN 300VAC
INSULATION RESISTANCE: MIN 100MΩ
CONTACT RESISTANCE: MAX 80mΩ

2. ENVIRONMENTAL:

OPERATING TEMPERATURE: -10°C TO +60°C
STORAGE TEMPERATURE: -30°C TO +60°C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

X.±
.X±
.XX±
.XXX±
ANG±

PPOJECTION

照片框

ORDER INFORMATION

CPMOL-PA-24-LF

SERIES | LEADFREE
24WAY
ASSEMBLY
MALE

DESCRIPTION: