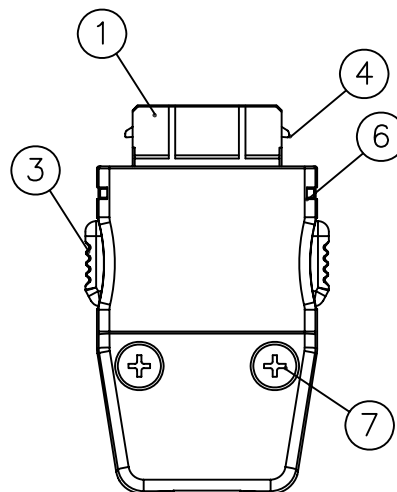
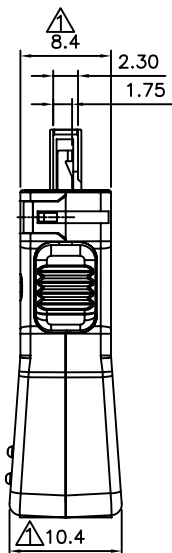
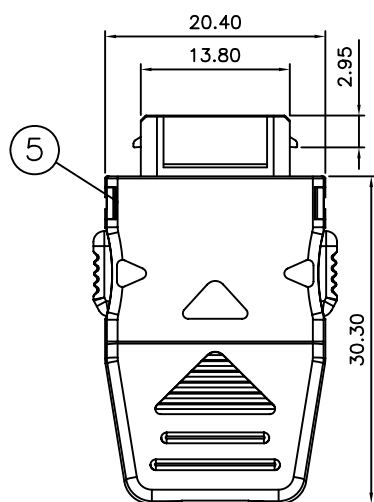



ITEM 項目	PARTS NAME 零件名稱	Q'TY 數量	MATERIAL 材質	FINISH/REMARK 處理/備註
1	HOUSING	1	PA-46	(Black)
2	CONTACT	18	Phosphor Bronze	Gold flash selective
3	BUTTON	2	A.B.S	(Gray)
4	LATCH	2	STAINLESS	Non-plating
5	TOP COVER	1	A.B.S	(Black)
6	BOTTOM COVER	1	A.B.S	(Black)
7	SCREW	2	C1018	(Black)

SPECIFICATION

MATERIAL

See drawing

STANDARD DATA

Rating current: 0.5A

Applicable wire: AWG#26 Max.

Operating temperature: -30?XC ~ +60?XC

Storage temperature: -40?XC ~ +85?XC

ELECTRICAL

Insulator resistance: 1000M ohms Min. @ 250 VDC

Withstanding voltage: 100 VAC / minute

Contact resistance: 50 m ohms Max.

MECHANICAL

Mating force: 30N(3.06kgf) Max.

Unmating force (Without lock): 4.2N(0.43kgf) Min.

Durability: 10000 cycles Min.

Contact retention force: 4.2N(0.43kgf) Min

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

CPMOL-PARV-24-LF

SERIES

LEADFREE

24WAY

REVERSED

ASSEMBLY

MALE

DESCRIPTION: PLUG IN for Solder type-18 position