
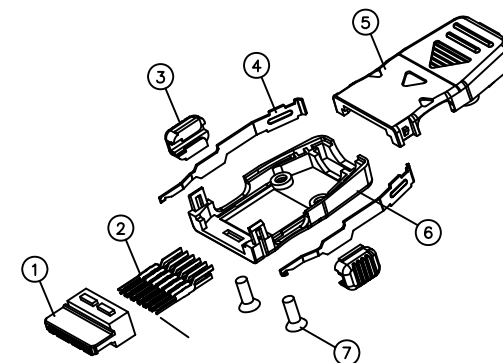
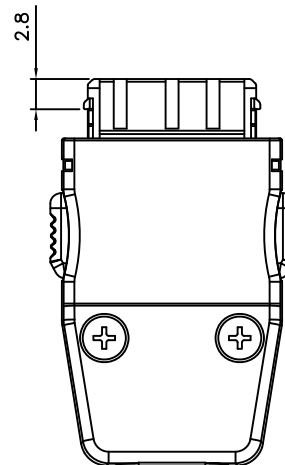
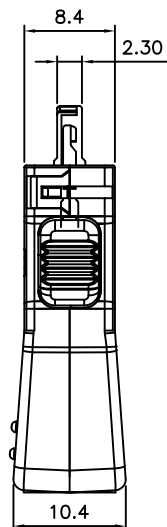

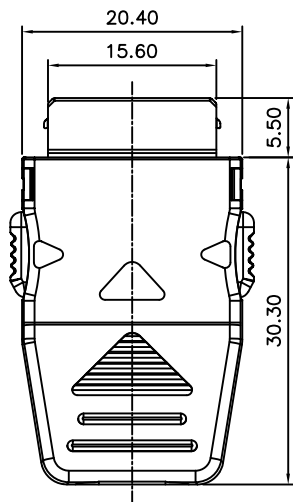




ITEM 項目	PARTS NAME 零件名稱	Q'TY 數量	MATERIAL 材質	FINISH/REMARK 處理/備註
1	HOUSING	1	NYLON	(Black)
2	CONTACT	24	Phosphor Bronze	Gold flash selective
3	BUTTON	2	A.B.S	(Gray)
4	LATCH	2	STAINLESS	Non-plating
5	TOP COVER	1	A.B.S	(Black)
6	BOTTOM COVER	1	A.B.S	(Black)
7	SCREW	2	C1018	(Black)

SPECIFICATION

MATERIAL

See drawing

STANDARD DATA

Rating current:0.5A

Applicable wire: AWG#26 Max.

Operating temperature: -30?XC ~ +60?XC

Storage temperature: -40?XC ~ +85?XC

ELECTRICAL

Insulator resistance: 1000M ohms Min. @ 250 VDC

Withstanding voltage: 100 VAC / minute

Contact resistance: 50 m ohms Max.

MECHANICAL

Mating force: 30N(3.06kgf) Max.

Unmating force (Without lock): 4.2N(0.43kgf) Min.

Durability: 10000 cycles Min.

Contact retention force: 4.2N(0.43kgf) Min

CPMOT-PA-24-LF

LEADFREE

RoHS Compliant

MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO. CPMOT-PA-24

DWG NO. CPMOT-PA-24

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X ± 0.2

.XX ± 0.1

.XXX ±

AWG

DESCRIP TION:

PLUG IN for MOTOROLA
Solder type-24 position

AREA

REVISIONS

HK

DATE

煜倫股份有限公司