


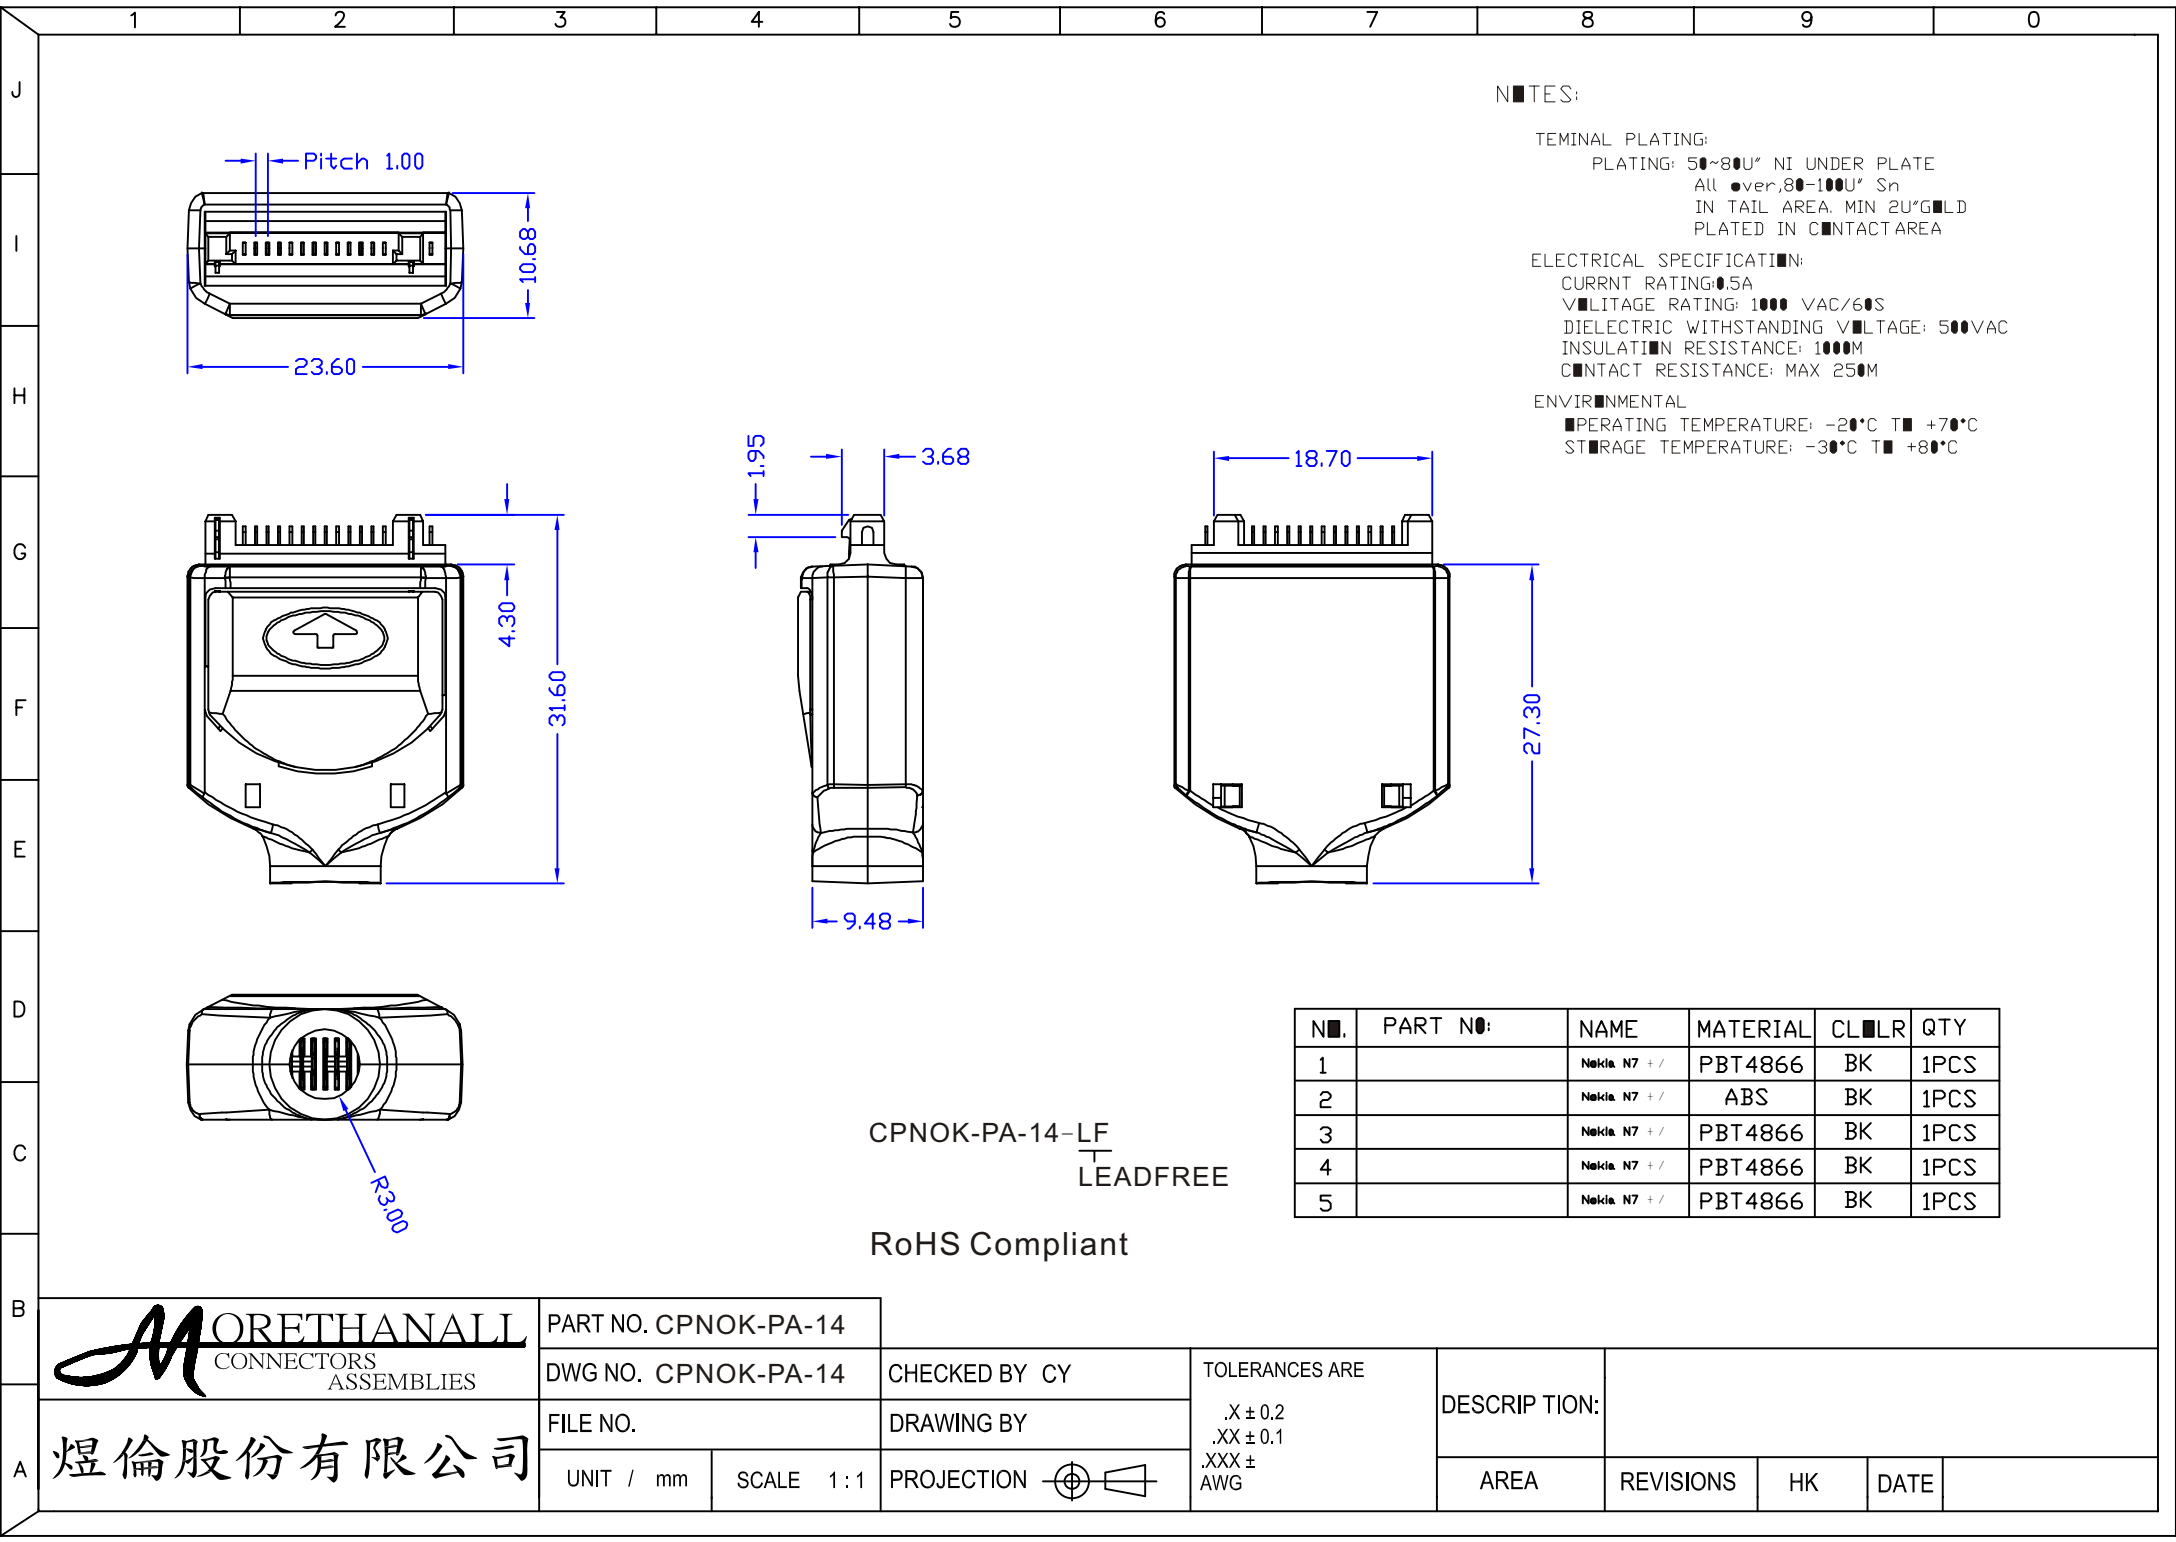

NOTES:

- TERMINAL PLATING:
PLATING: 50~80U" NI UNDER PLATE
All over, 80~100U" Sn
IN TAIL AREA, MIN 2U"GOLD
PLATED IN CONTACT AREA
- ELECTRICAL SPECIFICATION:
CURRENT RATING: 0.5A
VOLTAGE RATING: 1000 VAC/60S
DIELECTRIC WITHSTANDING VOLTAGE: 500VAC
INSULATION RESISTANCE: 1000M
CONTACT RESISTANCE: MAX 250M
- ENVIRONMENTAL
OPERATING TEMPERATURE: -20°C TO +70°C
STORAGE TEMPERATURE: -30°C TO +80°C

NO.	PART NO.	NAME	MATERIAL	COLOR	QTY
1		Nokia N7 + /	PBT4866	BK	1PCS
2		Nokia N7 + /	ABS	BK	1PCS
3		Nokia N7 + /	PBT4866	BK	1PCS
4		Nokia N7 + /	PBT4866	BK	1PCS
5		Nokia N7 + /	PBT4866	BK	1PCS


CPNOK-PA-14-LF
LEADFREE

RoHS Compliant




煜倫股份有限公司


PART NO. CPNOK-PA-14								
DWG NO. CPNOK-PA-14		CHECKED BY CY	TOLERANCES ARE .X ± 0.2 .XX ± 0.1 .XXX ± AWG	DESCRIP TION:				
FILE NO.		DRAWING BY						
UNIT / mm	SCALE 1:1	PROJECTION 		AREA	REVISIONS	HK	DATE	

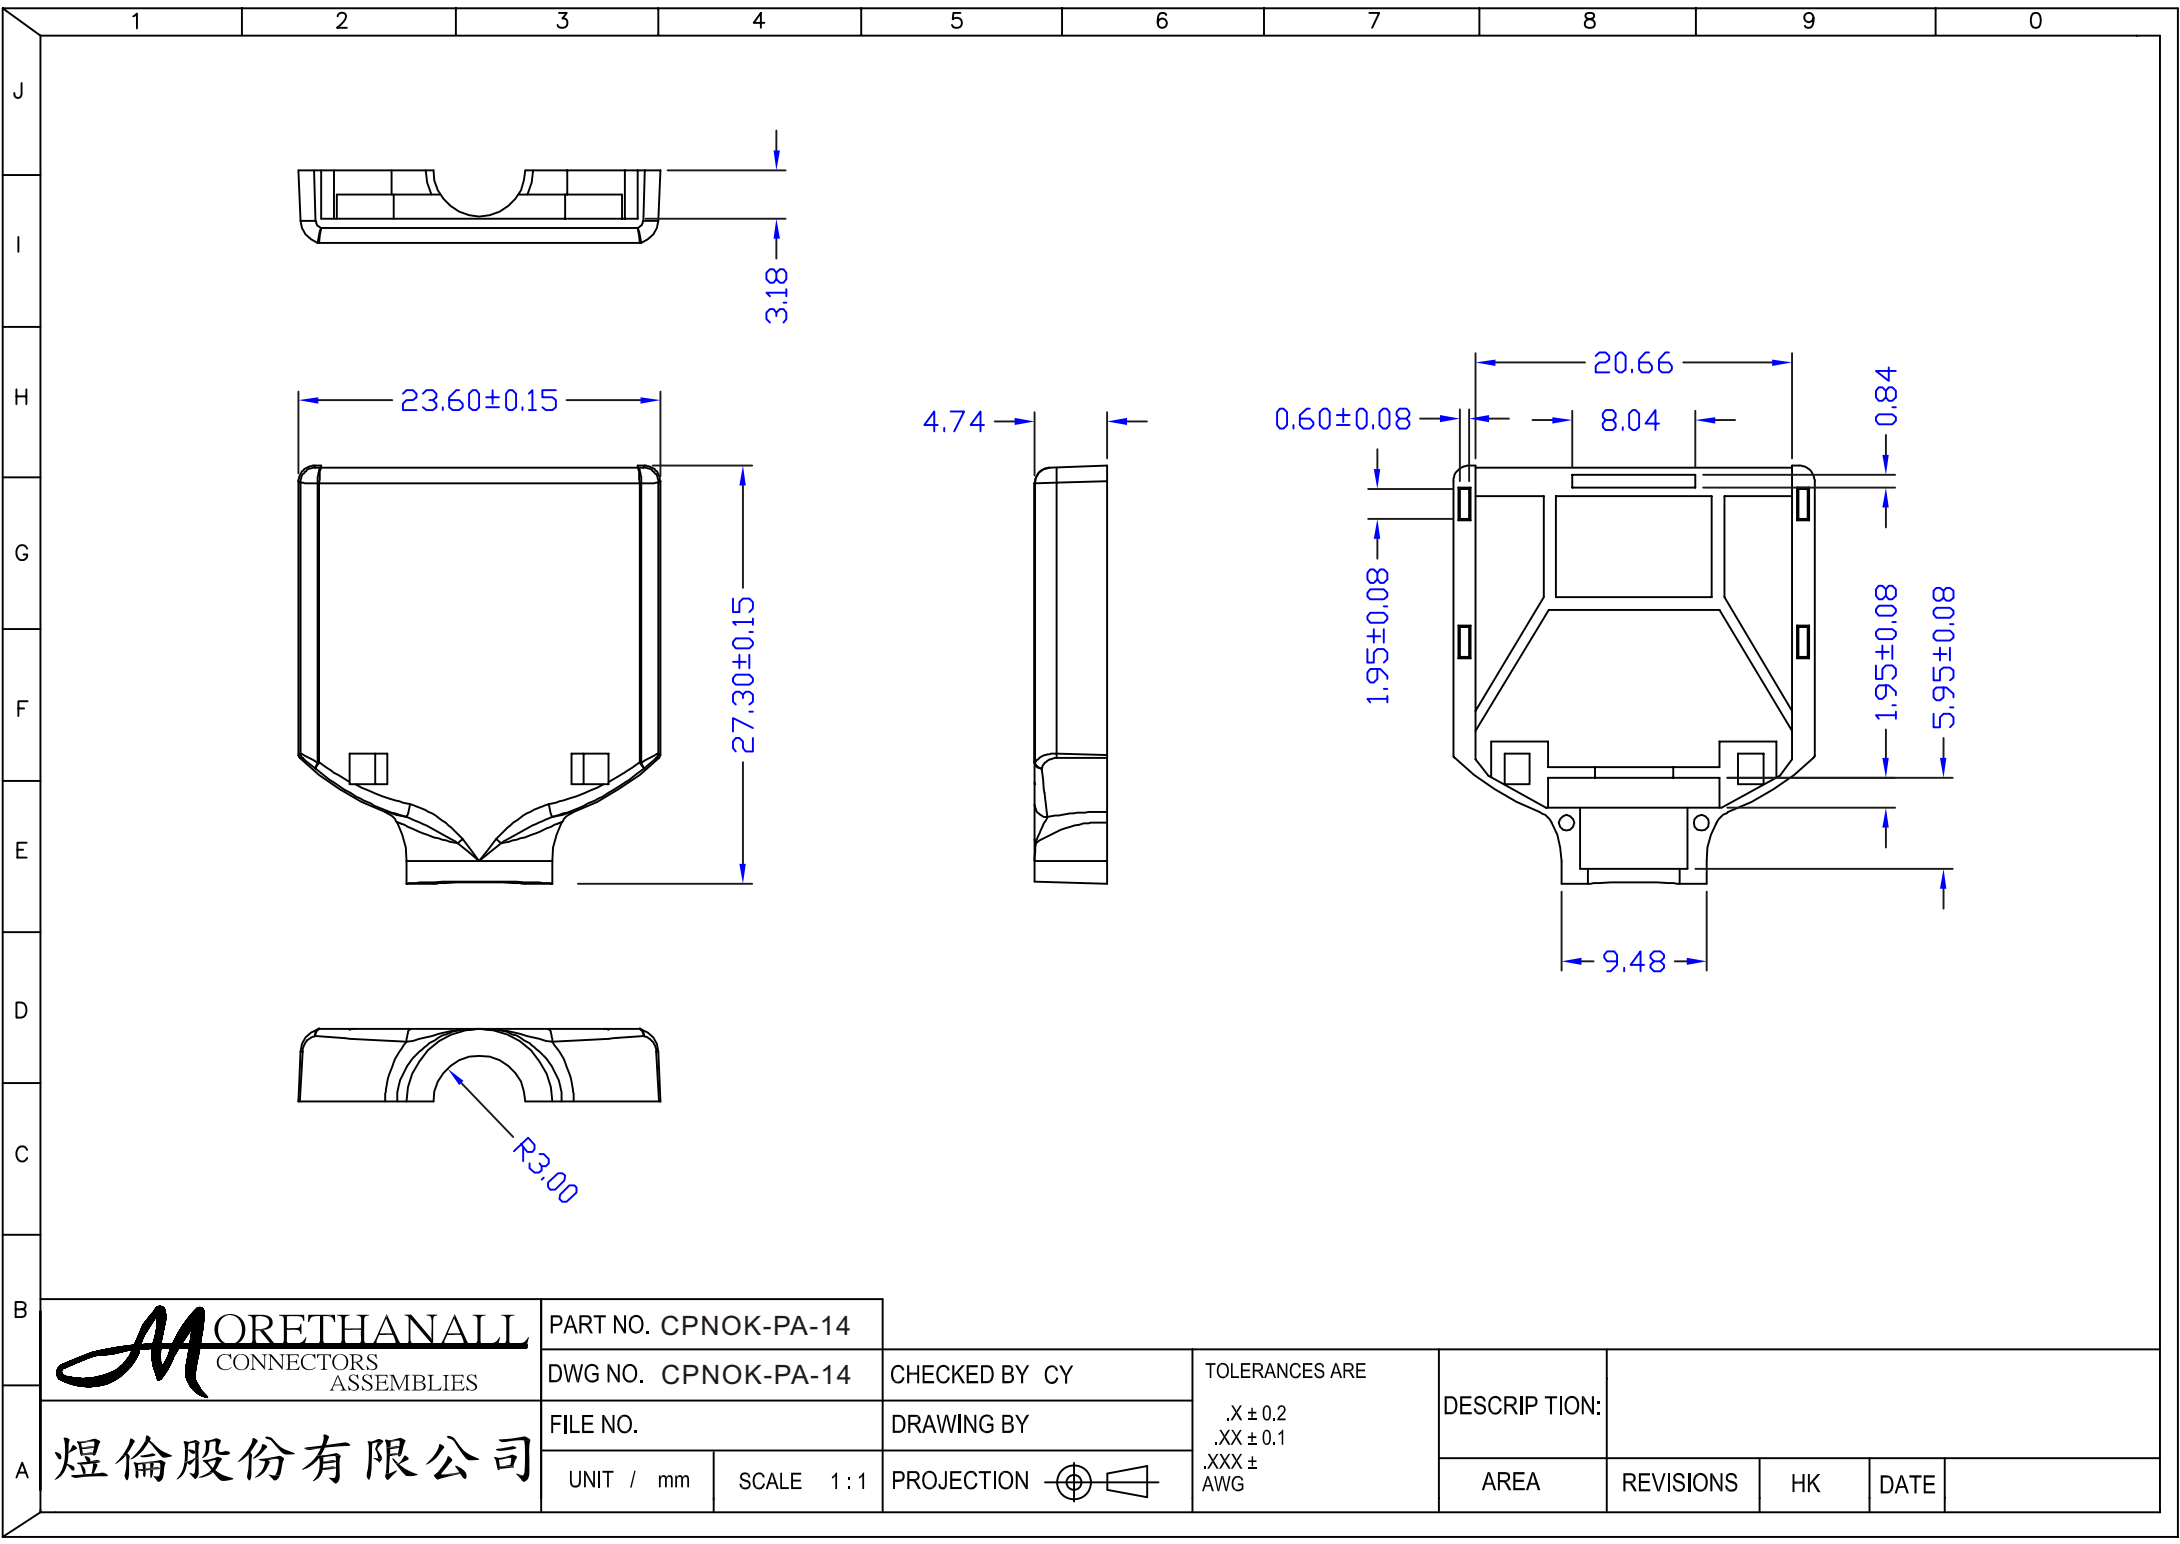

MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO. CPNOK-PA-14								
DWG NO. CPNOK-PA-14		CHECKED BY CY	TOLERANCES ARE .X ± 0.2 .XX ± 0.1 .XXX ± AWG	DESCRIP TION:				
FILE NO.		DRAWING BY						
UNIT / mm	SCALE 1:1	PROJECTION 		AREA	REVISIONS	HK	DATE	

煜倫股份有限公司

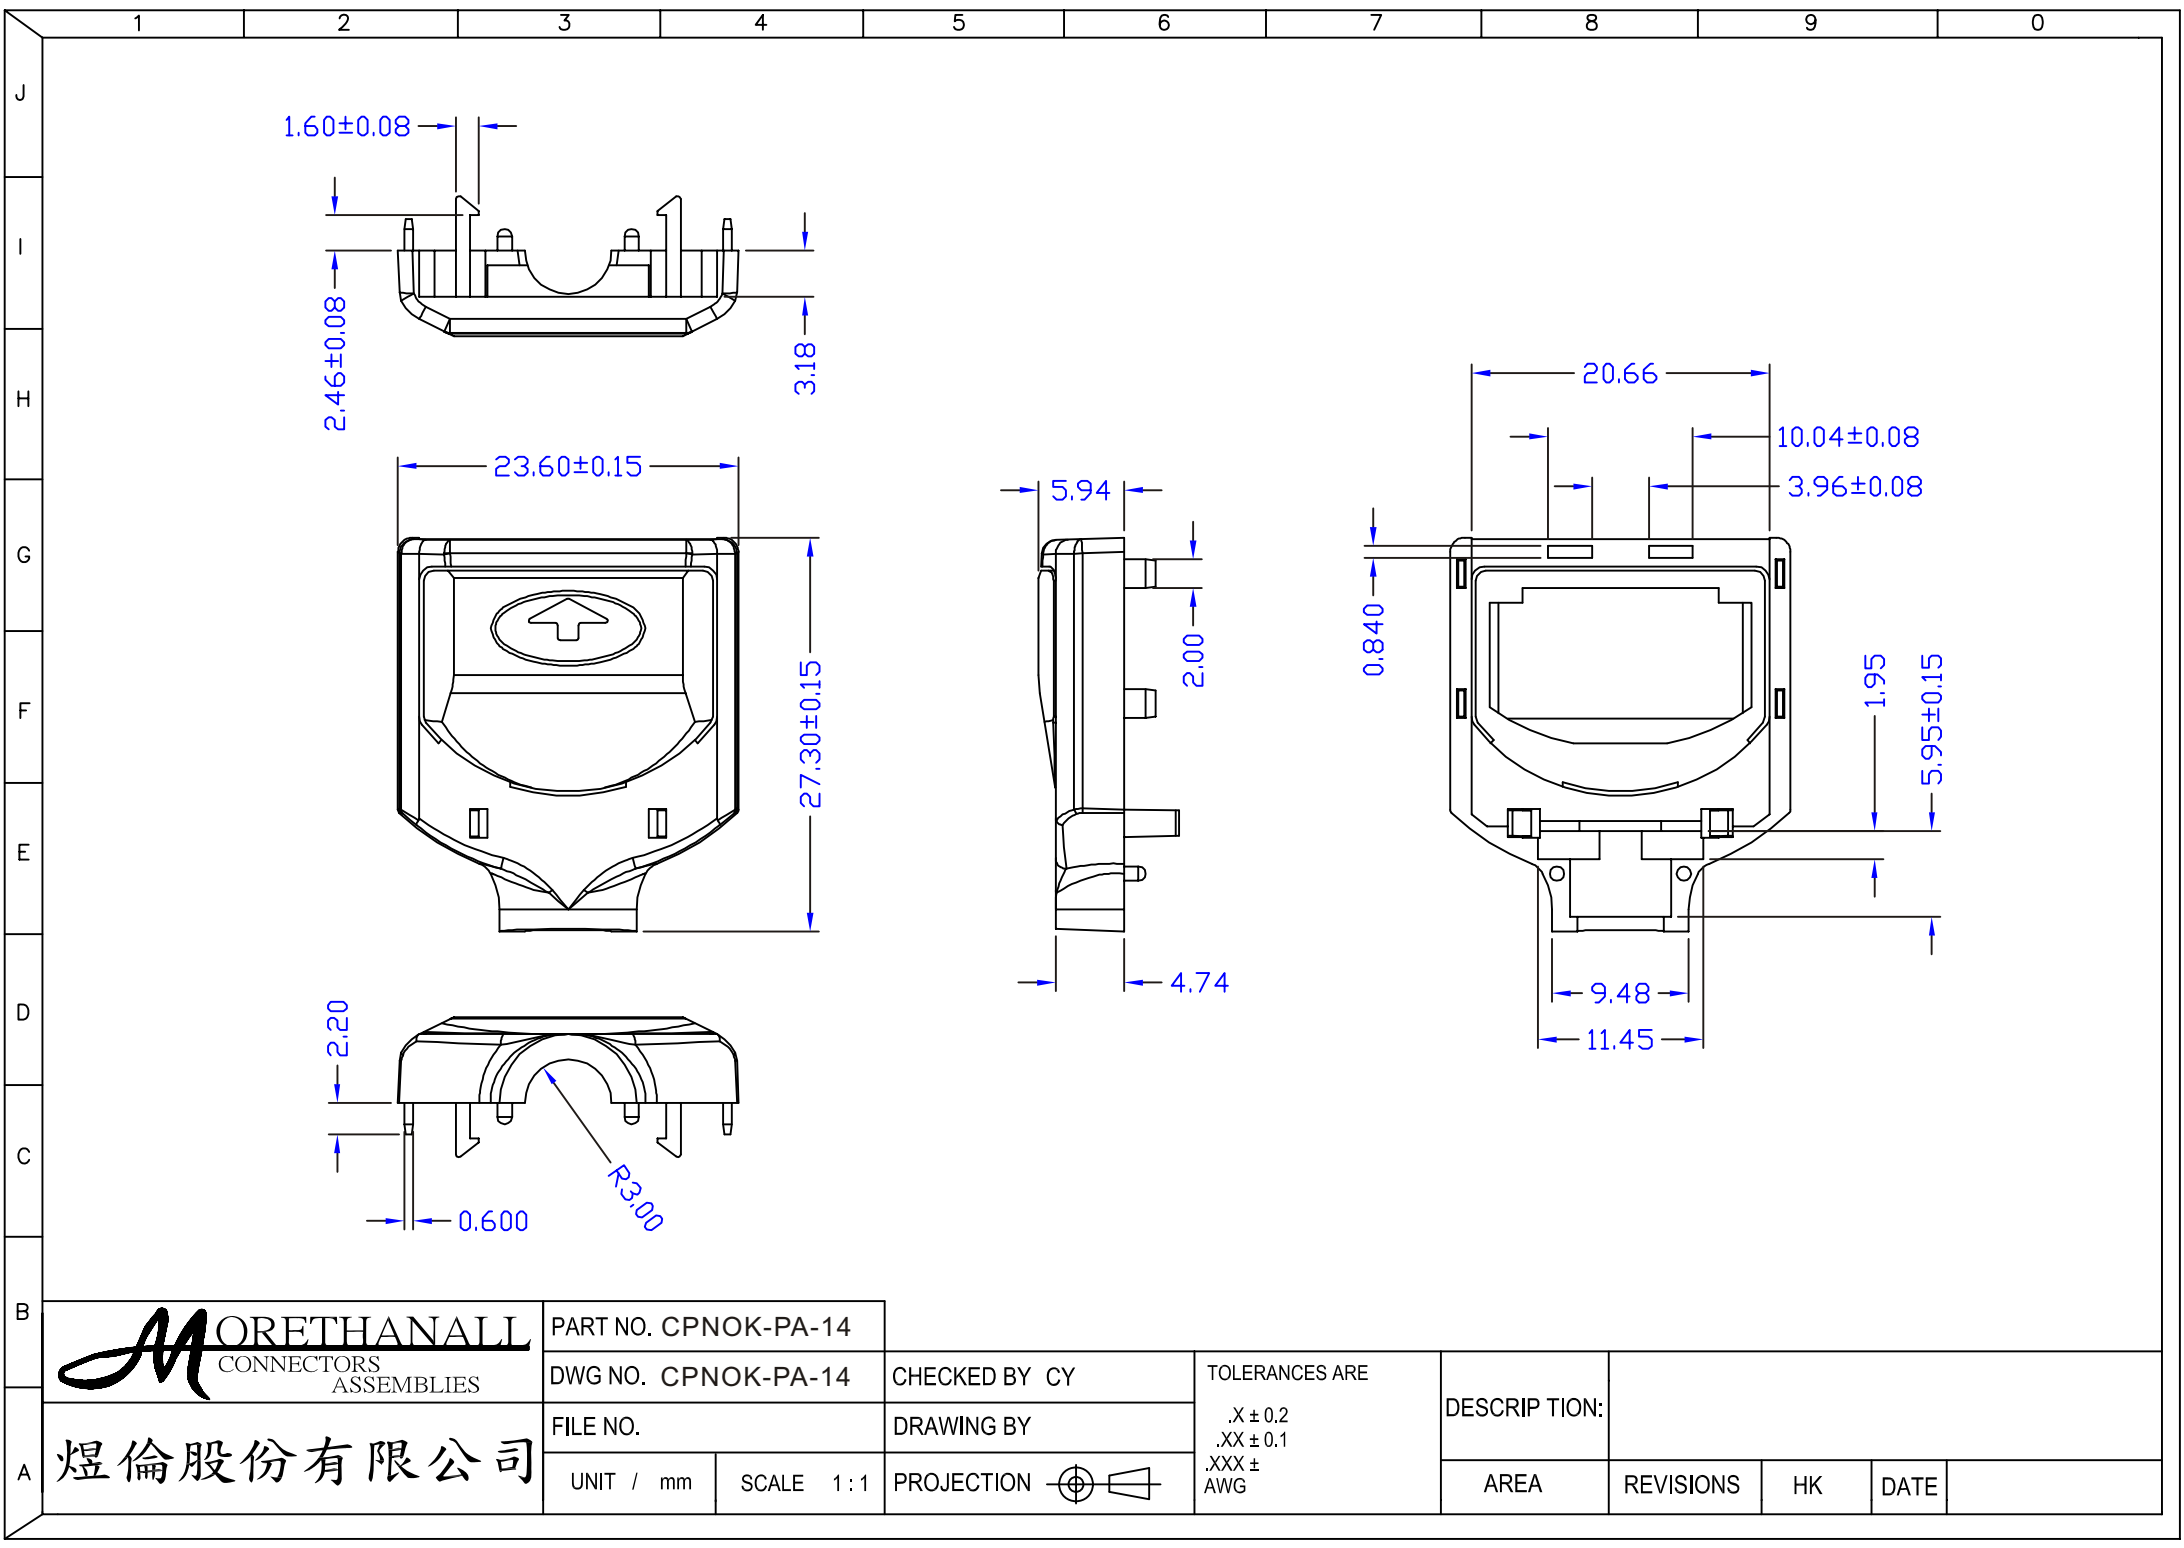

MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO. CPNOK-PA-14

DWG NO. CPNOK-PA-14

CHECKED BY CY

TOLERANCES ARE

FILE NO.

DRAWING BY

.X ± 0.2
.XX ± 0.1
.XXX $\pm$
AWG

DESCRIP TION:					
		AREA	REVISIONS	HK	DATE

煜倫股份有限公司

UNIT / mm

SCALE 1:1

PROJECTION 