


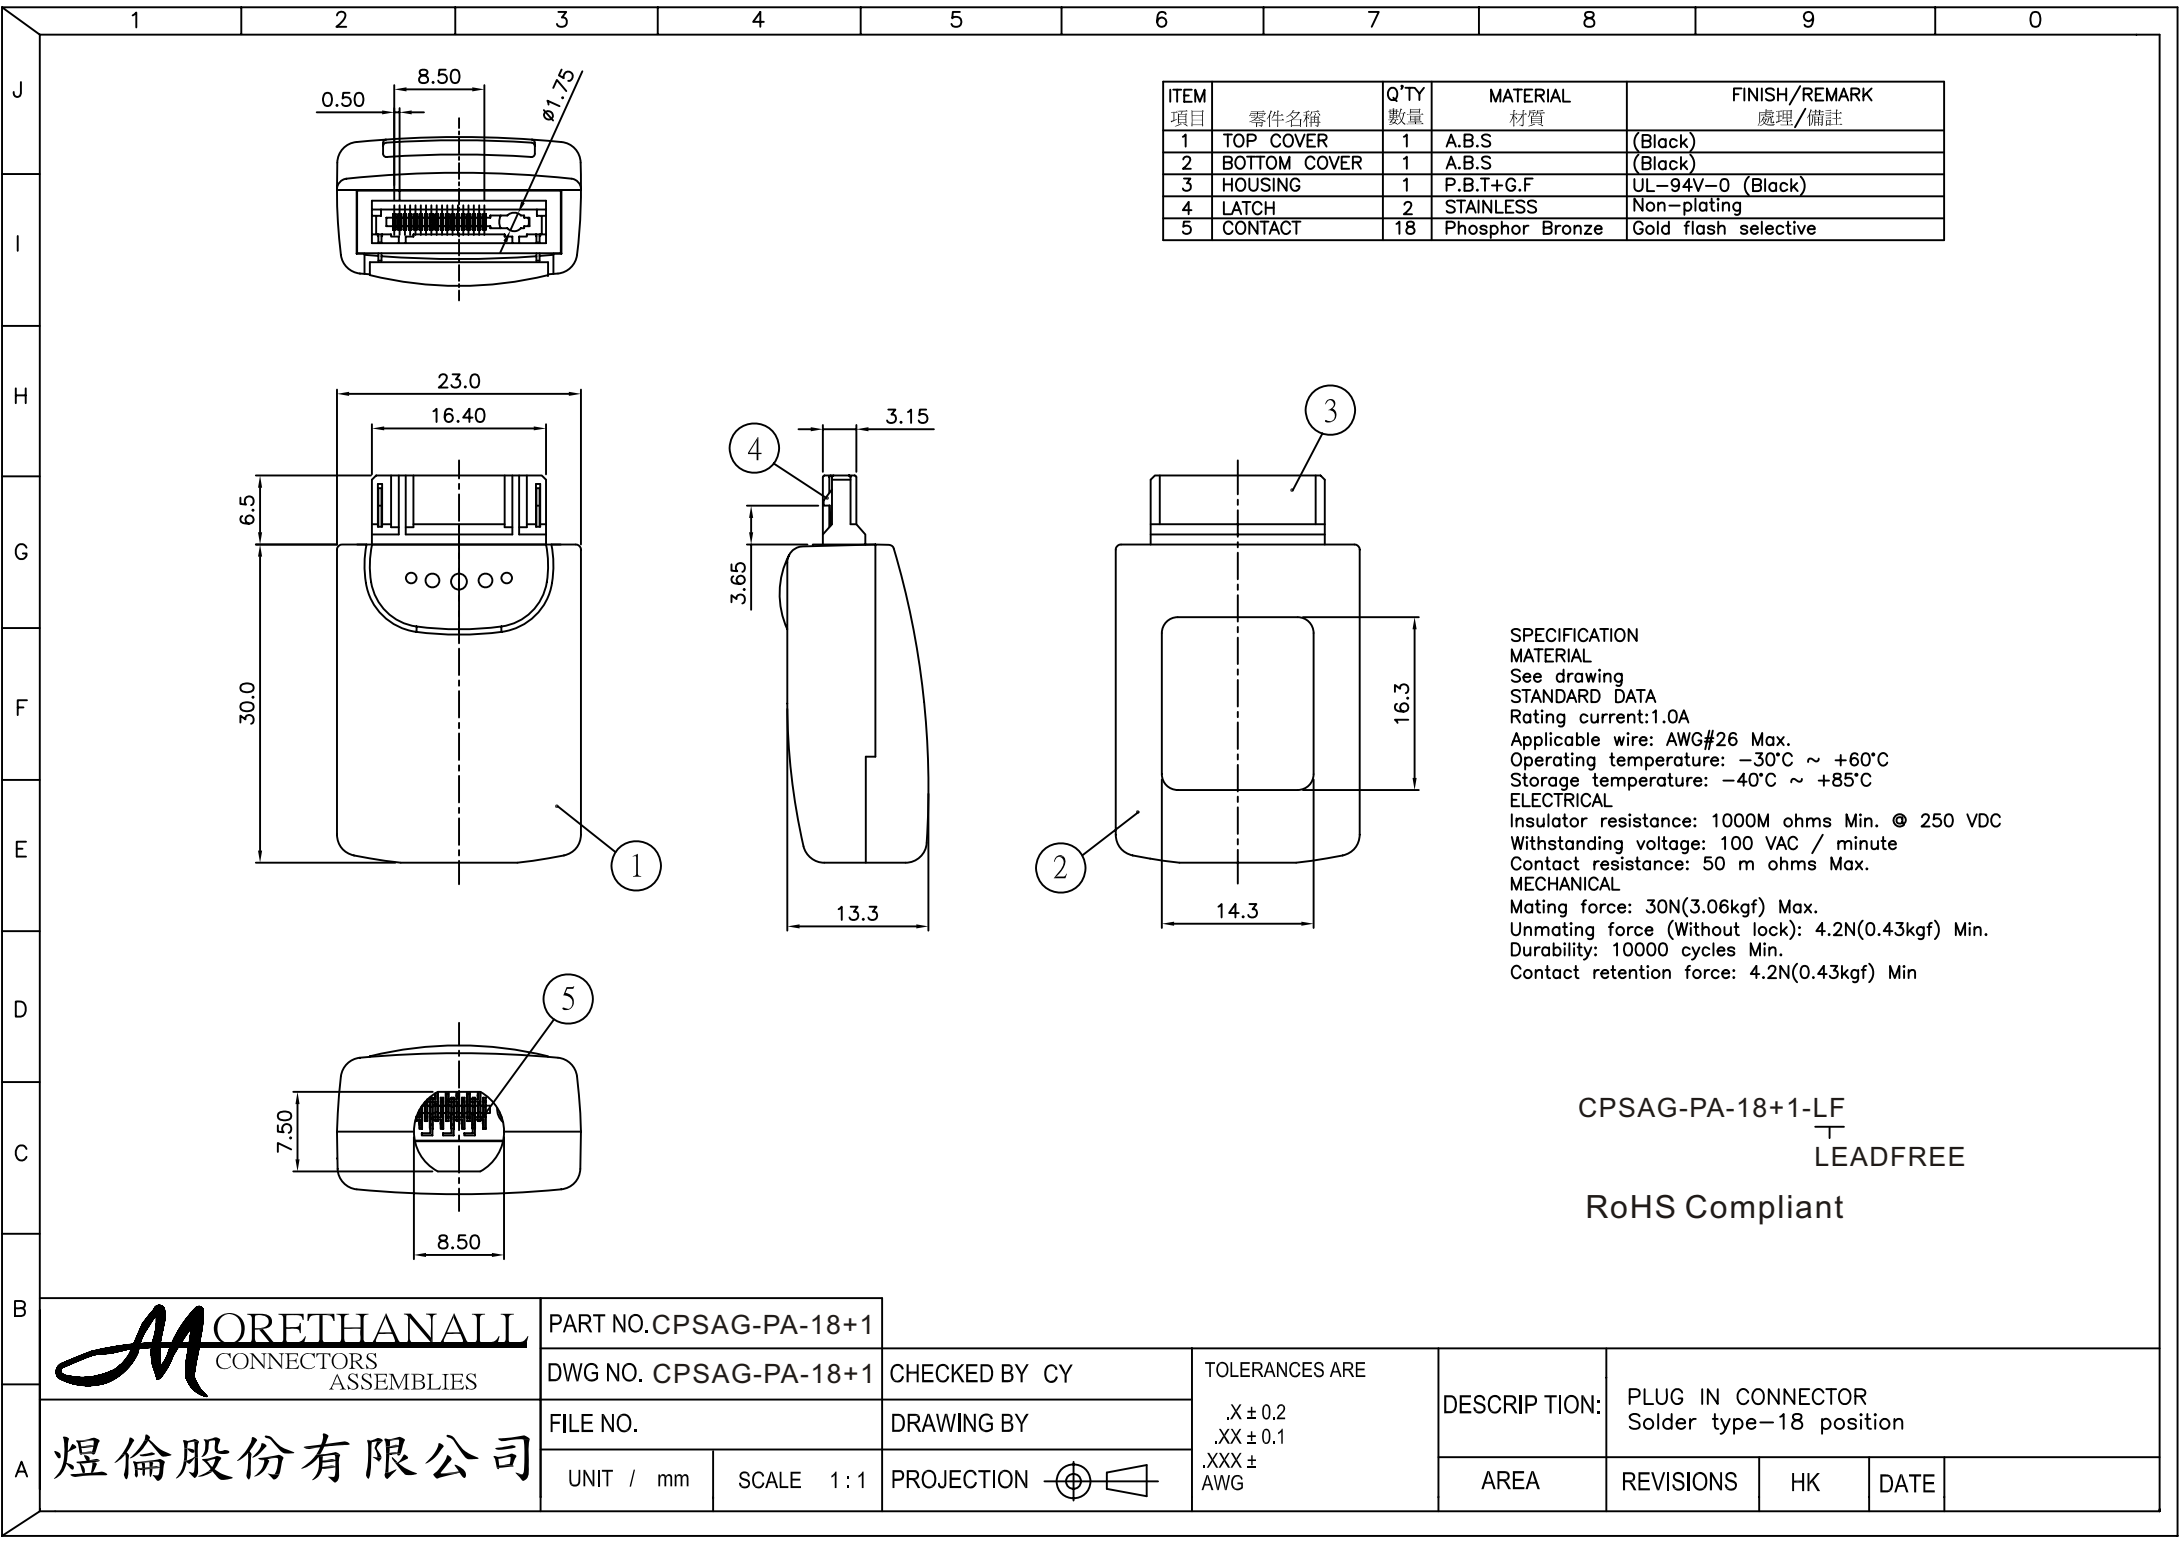

ITEM 項目	零件名稱	Q'TY 數量	MATERIAL 材質	FINISH/REMARK 處理/備註
1	TOP COVER	1	A.B.S	(Black)
2	BOTTOM COVER	1	A.B.S	(Black)
3	HOUSING	1	P.B.T+G.F	UL-94V-0 (Black)
4	LATCH	2	STAINLESS	Non-plating
5	CONTACT	18	Phosphor Bronze	Gold flash selective

SPECIFICATION
MATERIAL
See drawing
STANDARD DATA
Rating current:1.0A
Applicable wire: AWG#26 Max.
Operating temperature: -30°C ~ +60°C
Storage temperature: -40°C ~ +85°C
ELECTRICAL
Insulator resistance: 1000M ohms Min. @ 250 VDC
Withstanding voltage: 100 VAC / minute
Contact resistance: 50 m ohms Max.
MECHANICAL
Mating force: 30N(3.06kgf) Max.
Unmating force (Without lock): 4.2N(0.43kgf) Min.
Durability: 10000 cycles Min.
Contact retention force: 4.2N(0.43kgf) Min

CPSAG-PA-18+1-LF
LEADFREE

RoHS Compliant

MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO.CPSAG-PA-18+1								
DWG NO. CPSAG-PA-18+1		CHECKED BY CY	TOLERANCES ARE .X ± 0.2 .XX ± 0.1 .XXX ± AWG	DESCRIP TION:	PLUG IN CONNECTOR Solder type—18 position			
FILE NO.		DRAWING BY						
UNIT / mm	SCALE 1:1	PROJECTION 		AREA	REVISIONS	HK	DATE	

煜倫股份有限公司