


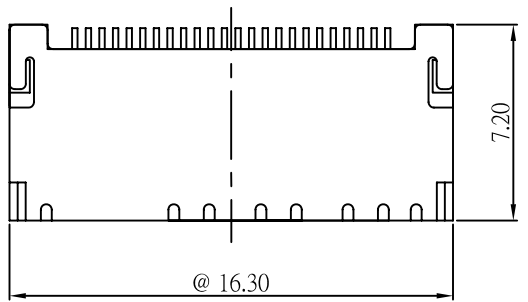






NO	PART NO.	PART NAME	UNIT
1	KS014-30	Housing(本體)	1
2	20040-18	TERMINAL(24pin端子)	24
3	22005-2N	SHELL(鐵殼)	1

- NOTES
- 1. MATERIAL & FLASH/PLATED
 - 1.1 HOUSING: HIGH TEMP. THERMOPLASTIC+GLASS FIBRE [UL 94V-0]; COLOR: BLACK
 - 1.2 TERMINAL: PHOSPHOR BRONZE
.PLATED: 8u" GOLD ON CONTACT AREA.
120u" MIN. TIN/LEAD ON SOLDER TAILS.
.BASE NICKEL: 50u" MIN.
 - 1.3 SHELL: STAINLESS
.PLATED: 40u" MIN. NICKEL ON ALL;
 - 2. IMPORTANT DIM MARK:"@"
 - 3. PACKAGE: TAPE REL

CPSAM-JW33-24-LF

LEADFREE

RoHS Compliant

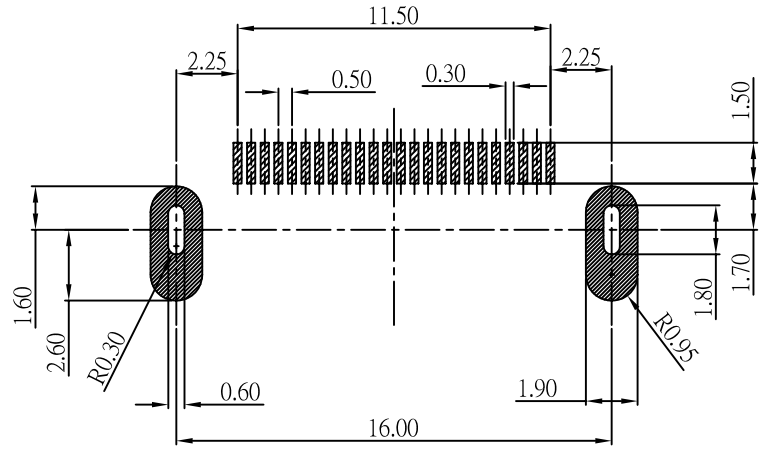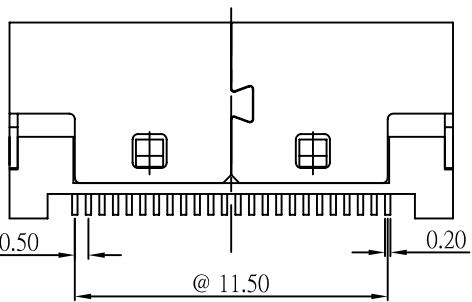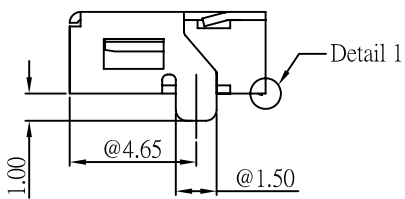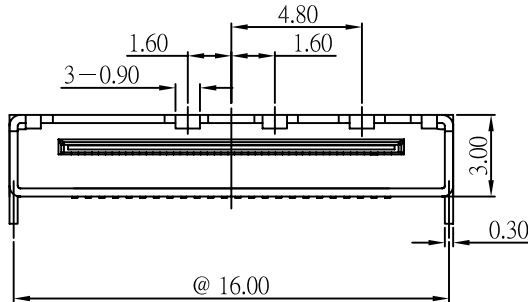

RECOMMENDED PC BOARD LAYOUT
TOLERANCE: ±0.05mm [TOP VIEW]



煜倫股份有限公司

PART NO. CPSAM-JW33-24									
DWG NO. CPSAM-JW33-24		CHECKED BY CY		TOLERANCES ARE .X ± 0.1 .XX ± 0.01 .XXX ± AWG	DESCRIP TION:	24pin(type2) Female I/O Connector			
FILE NO.		DRAWING BY							
UNIT / mm	SCALE 1:1	PROJECTION			AREA	REVISIONS	HK	DATE	