
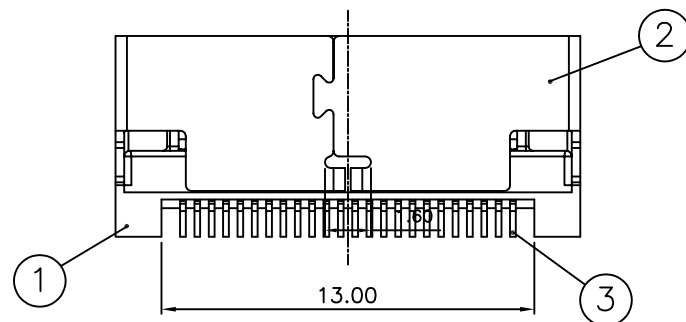

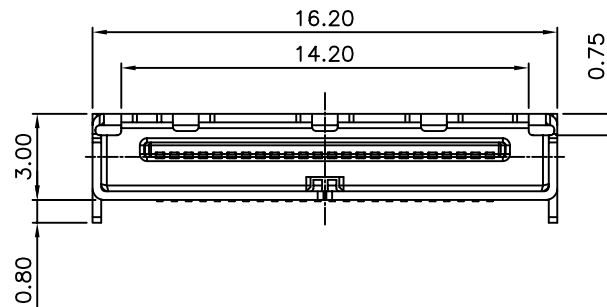


ITEM 項目	PARTS NAME 零件名稱	Q'TY 數量	MATERIAL 材質	FINISH/REMARK 處理/備註
1	HOUSING	1	L.C.P	(Black)
2	SHELL	1	STAINLESS	Ni 50u" Tin(lead free) 100u"
3	CONTACT	24	Phosphor Bronze	5u"Gold flash selective(lead free)

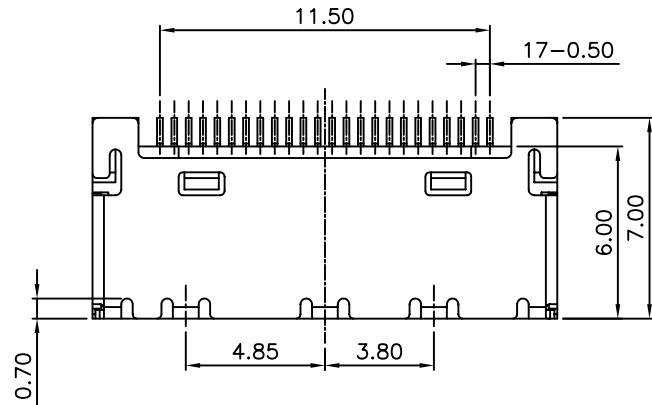

SPECIFICATION

MATERIAL

See drawing

STANDARD DATA

Rating current:0.5A

Applicable wire: AWG#26 Max.

Operating temperature: $-30^{\circ}\text{C} \sim +70^{\circ}\text{C}$

Storage temperature: $-10^{\circ}\text{C} \sim +60^{\circ}\text{C}$

ELECTRICAL

Insulator resistance: 250M ohms Min. @ 100 VDC

Withstanding voltage: 100 VAC / minute

Contact resistance: 60 m ohms Max.

MECHANICAL

Mating force: 30N(3.06kgf) Max.

Unmating force (Without lock): 4.2N(0.43kgf) Min.

Durability: 10000 cycles Min.

Contact retention force: 2.1N(0.21kgf) Min

CPSAM-JW43-24-LF

LEADFREE

RoHS Compliant

MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO. CPSAM-JW43-24

DWG NO. CPSAM-JW43-24

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE

 $.X \pm 0.2$ $.XX \pm$ $.XXX \pm$

AWG

DESCRIPTION:

I/O CONNECTOR
SMD type-24 position

AREA

REVISIONS

HK

DATE

煜倫股份有限公司