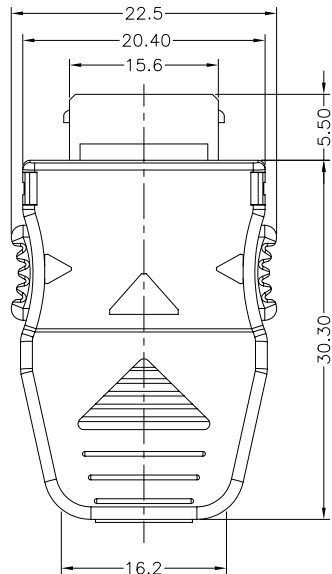



SPECIFICATION

MATERIAL

SEE DRAWING

STANDARD DATA

RATING CURRENT:0.5A

APPLICABLE WIRE: AWG#26 MAX.

OPERATING TEMPERATURE: -30°C ~ +60°C

STORAGE TEMPERATURE: -40°C ~ +85°C

ELECTRICAL

INSULATOR RESISTANCE: 1000M OHMS MIN. @ 250 VDC

WIRHSRANDING VOLTAGE: 100 VAC / MINUTE

CONTACT RESISTANCE: 50 m OHMS MAX.


MECHANICAL

MATING FORCE: 30N(3.06KGF) MAX.

UNMATING FORCE(WITHOUT LOCK): 4.2N(0.43KGF) MIN.

DURABILITY:10000 CYCLES MIN.

CONTACT RETENTION FORCE: 4.2N(0.43KGF) MIN

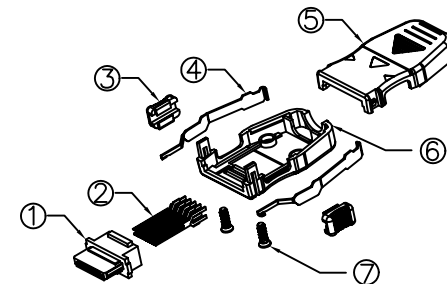

ITEM	PARTS NAME	MATERIAL	FINISH/REMARK	QTY
1	HOUSING	LCP	BLACK	1
2	CONTACT	PHOSPHOR BRONZE	GOLD FLASH SELECTIVE	24
3	BUTTON	A.B.S	GRAY	2
4	LATCH	STAINLESS	NON-PLATING	2
5	TOP COVER	A.B.S+PC	BLACK	1
6	BOTTIM COVER	A.B.S+PC	BLACK	1
7	SCREW	C1018	BLACK	2

MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO. CPSAM-PA-24

DWG NO. CPSAM-PA-24

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X ± 0.2

.XX ± 0.15

.XXX ±

AWG

DESCRIP TION:

Plug in for Motorola
Solder type-24 position

AREA

REVISIONS

HK

DATE

煜倫股份有限公司