
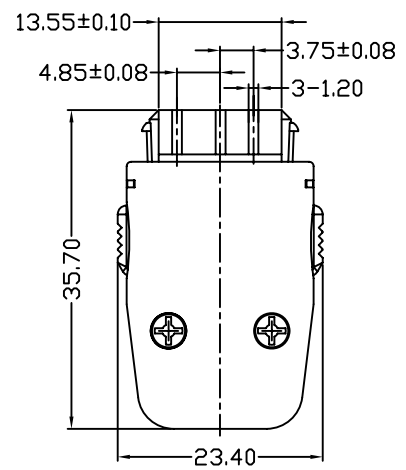
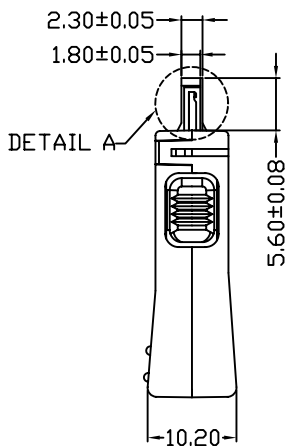
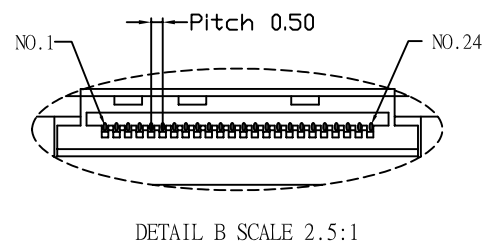


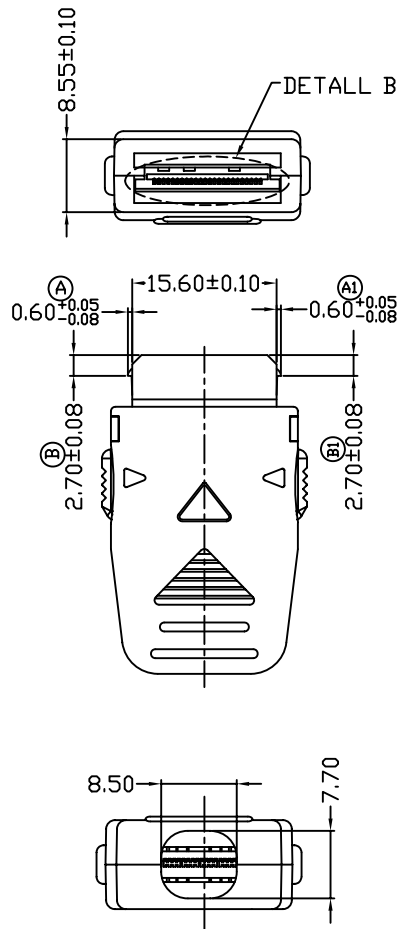

NOTE:

1.ELECTRICAL
CURRENT RATING:0.8A
DIELECTRIC WITHSTANDING VOLTAGE:300VAC/60S
INSULATION RESISTANCE:100MΩ/1000VDC
CONTACT RESISTANCE:MAX 80MΩ

2.ENVIRONMENTAL
OPERATING TEMPERATURE:-15℃ TO +85℃
STORAGE TEMPERATURE:-30℃ TO +85℃

CPSAM-PA43-24-LF
LEADFREE
RoHS Compliant

注: |A-A1| ≤ 0.08
|B-B1| ≤ 0.08

 CONNECTORS ASSEMBLIES	PART NO.CPSAM-PA43-24		CHECKED BY CY		TOLERANCES ARE .X ± 0.2 .XX ± .XXX ± AWG	DESCRIP TION:					
	DWG NO. CPSAM-PA43-24										
	FILE NO.		DRAWING BY			AREA		REVISIONS	HK	DATE	
	UNIT / mm	SCALE 1:1	PROJECTION 								