

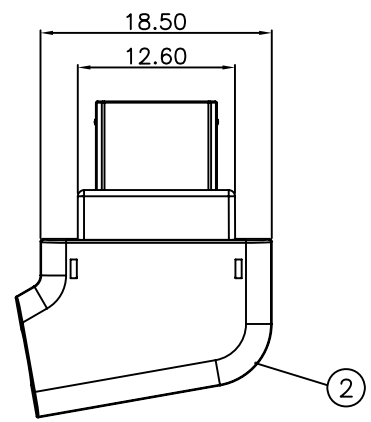
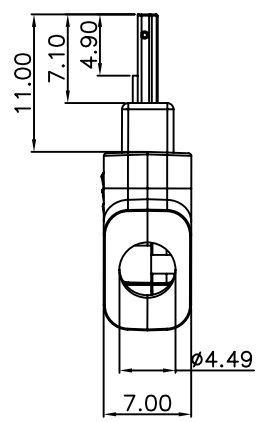
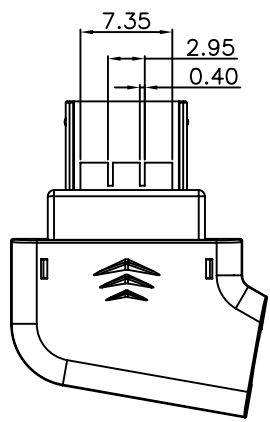
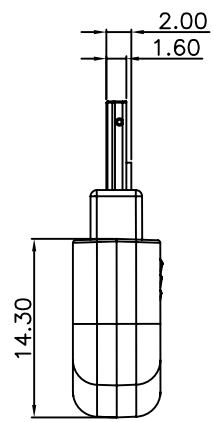



項目	PARTS NAME 零件名稱	Q'TY 數量	MATERIAL 材質	FINISH/REMARK 處理/備註
1	TOP COVER	1	A.B.S	Black
2	BOTTOM COVER	1	A.B.S	Black
3	HOUSING	1	NYLON	Black
4	SHELL	1	STAINLESS	Plating Nickel over all (50u")
5	CAP	1	A.B.S	
6	CONTACT	20	Phosphor Bronze	Gold flash

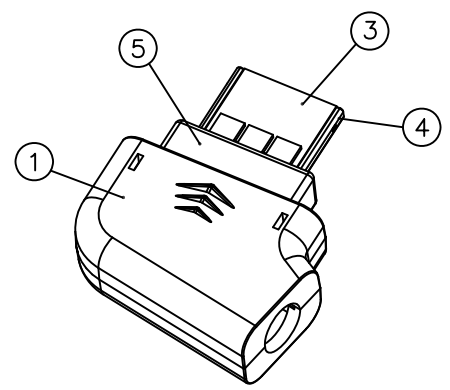

SPECIFICATION
MATERIAL
See drawing
STANDARD DATA
Rating current:1.0A
Applicable wire: AWG#26 Max.
Operating temperature: -30°C ~ +60°C
Storage temperature: -40°C ~ +85°C
ELECTRICAL
Insulator resistance: 1000M ohms Min. @ 250 VDC
Withstanding voltage: 100 VAC / minute
Contact resistance: 50 m ohms Max.
MECHANICAL
Mating force: 30N(3.06kgf) Max.
Unmating force (Without lock): 2.25N(0.23kgf) Min.
Durability: 10000 cycles Min.
Contact retention force: 2.25N(0.23kgf) Min



CPSAM-PAR-20-LF
LEADFREE
RoHS Compliant

 MORETHANALL CONNECTORS ASSEMBLIES 煜倫股份有限公司	PART NO. CPSAM-PAR-20		CHECKED BY CY		TOLERANCES ARE .X ± 0.2 .XX ± .XXX ± AWG	DESCRIP TION: PLUG IN CONNECTOR SMT type-20 position				
	DWG NO. CPSAM-PAR-20									
	FILE NO.		DRAWING BY		AREA	REVISIONS	HK	DATE		
	UNIT / mm	SCALE 1:1	PROJECTION 							