

J

I

H

G

F



E

D






C

B

A

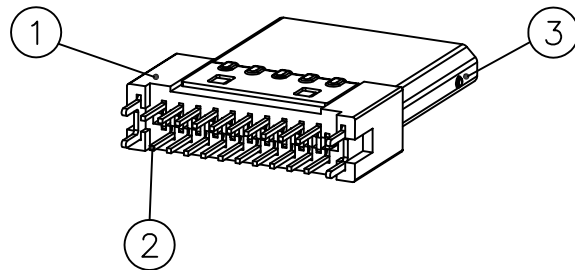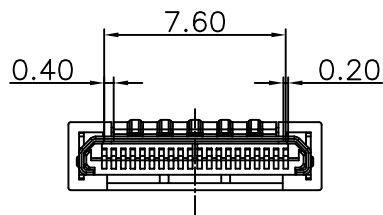

ITEM 項目	PARTS NAME 零件名稱	Q'TY 數量	MATERIAL 材質	FINISH/REMARK 處理/備註
1	HOUSING	1	NYLON	Black
2	CONTACT	20	Phosphor Bronze	Gold : 3u"
3	SHELL	1	SUS304	Plating Nickel : 50u"

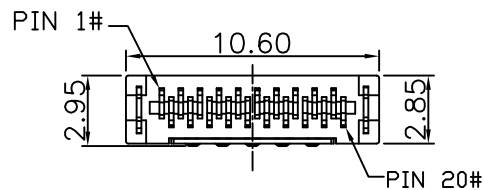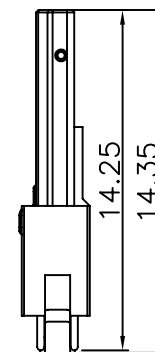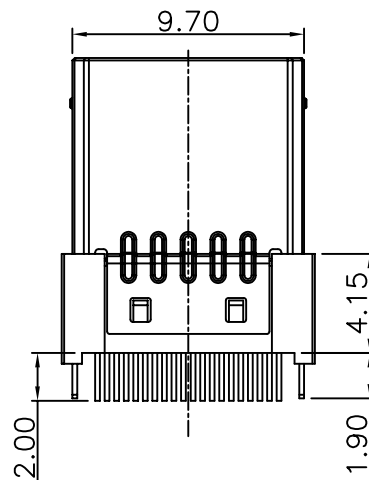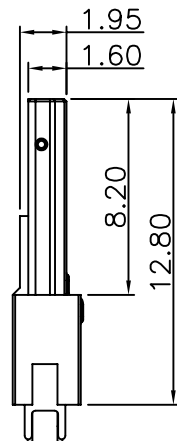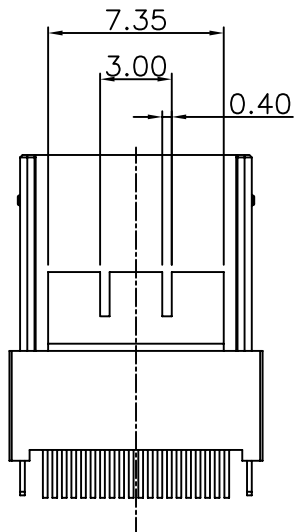

NOTES

1.MATERIAL: See drawing

2.ELECTRICAL

2.1.Insulator resistance: 1000M ohms Min. @ 250 VDC

2.2.Withstanding voltage: 100 VAC / minute

2.3.Contact resistance: 50m ohms Max.

3.MECHANICAL

3.1.Mating force: 30N(3.06kgf) Max.

3.2.Unmating force: 2.25N(0.23kgf) Min.

3.3.Durability: 10000 cycles Min.

3.4.Contact retention force: 2.25N(0.23kgf) Min

4.PACKING: 50pcs/tray (reference)

CPSAM-PE-20-LF
LEADFREE
RoHS Compliant

MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO. CPSAM-PE-20

DWG NO. CPSAM-PE-20

FILE NO.


UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X ± 0.2

.XX ±

.XXX ±

AWG

DESCRIP TION:

AREA

REVISIONS

HK

DATE

煜倫股份有限公司