


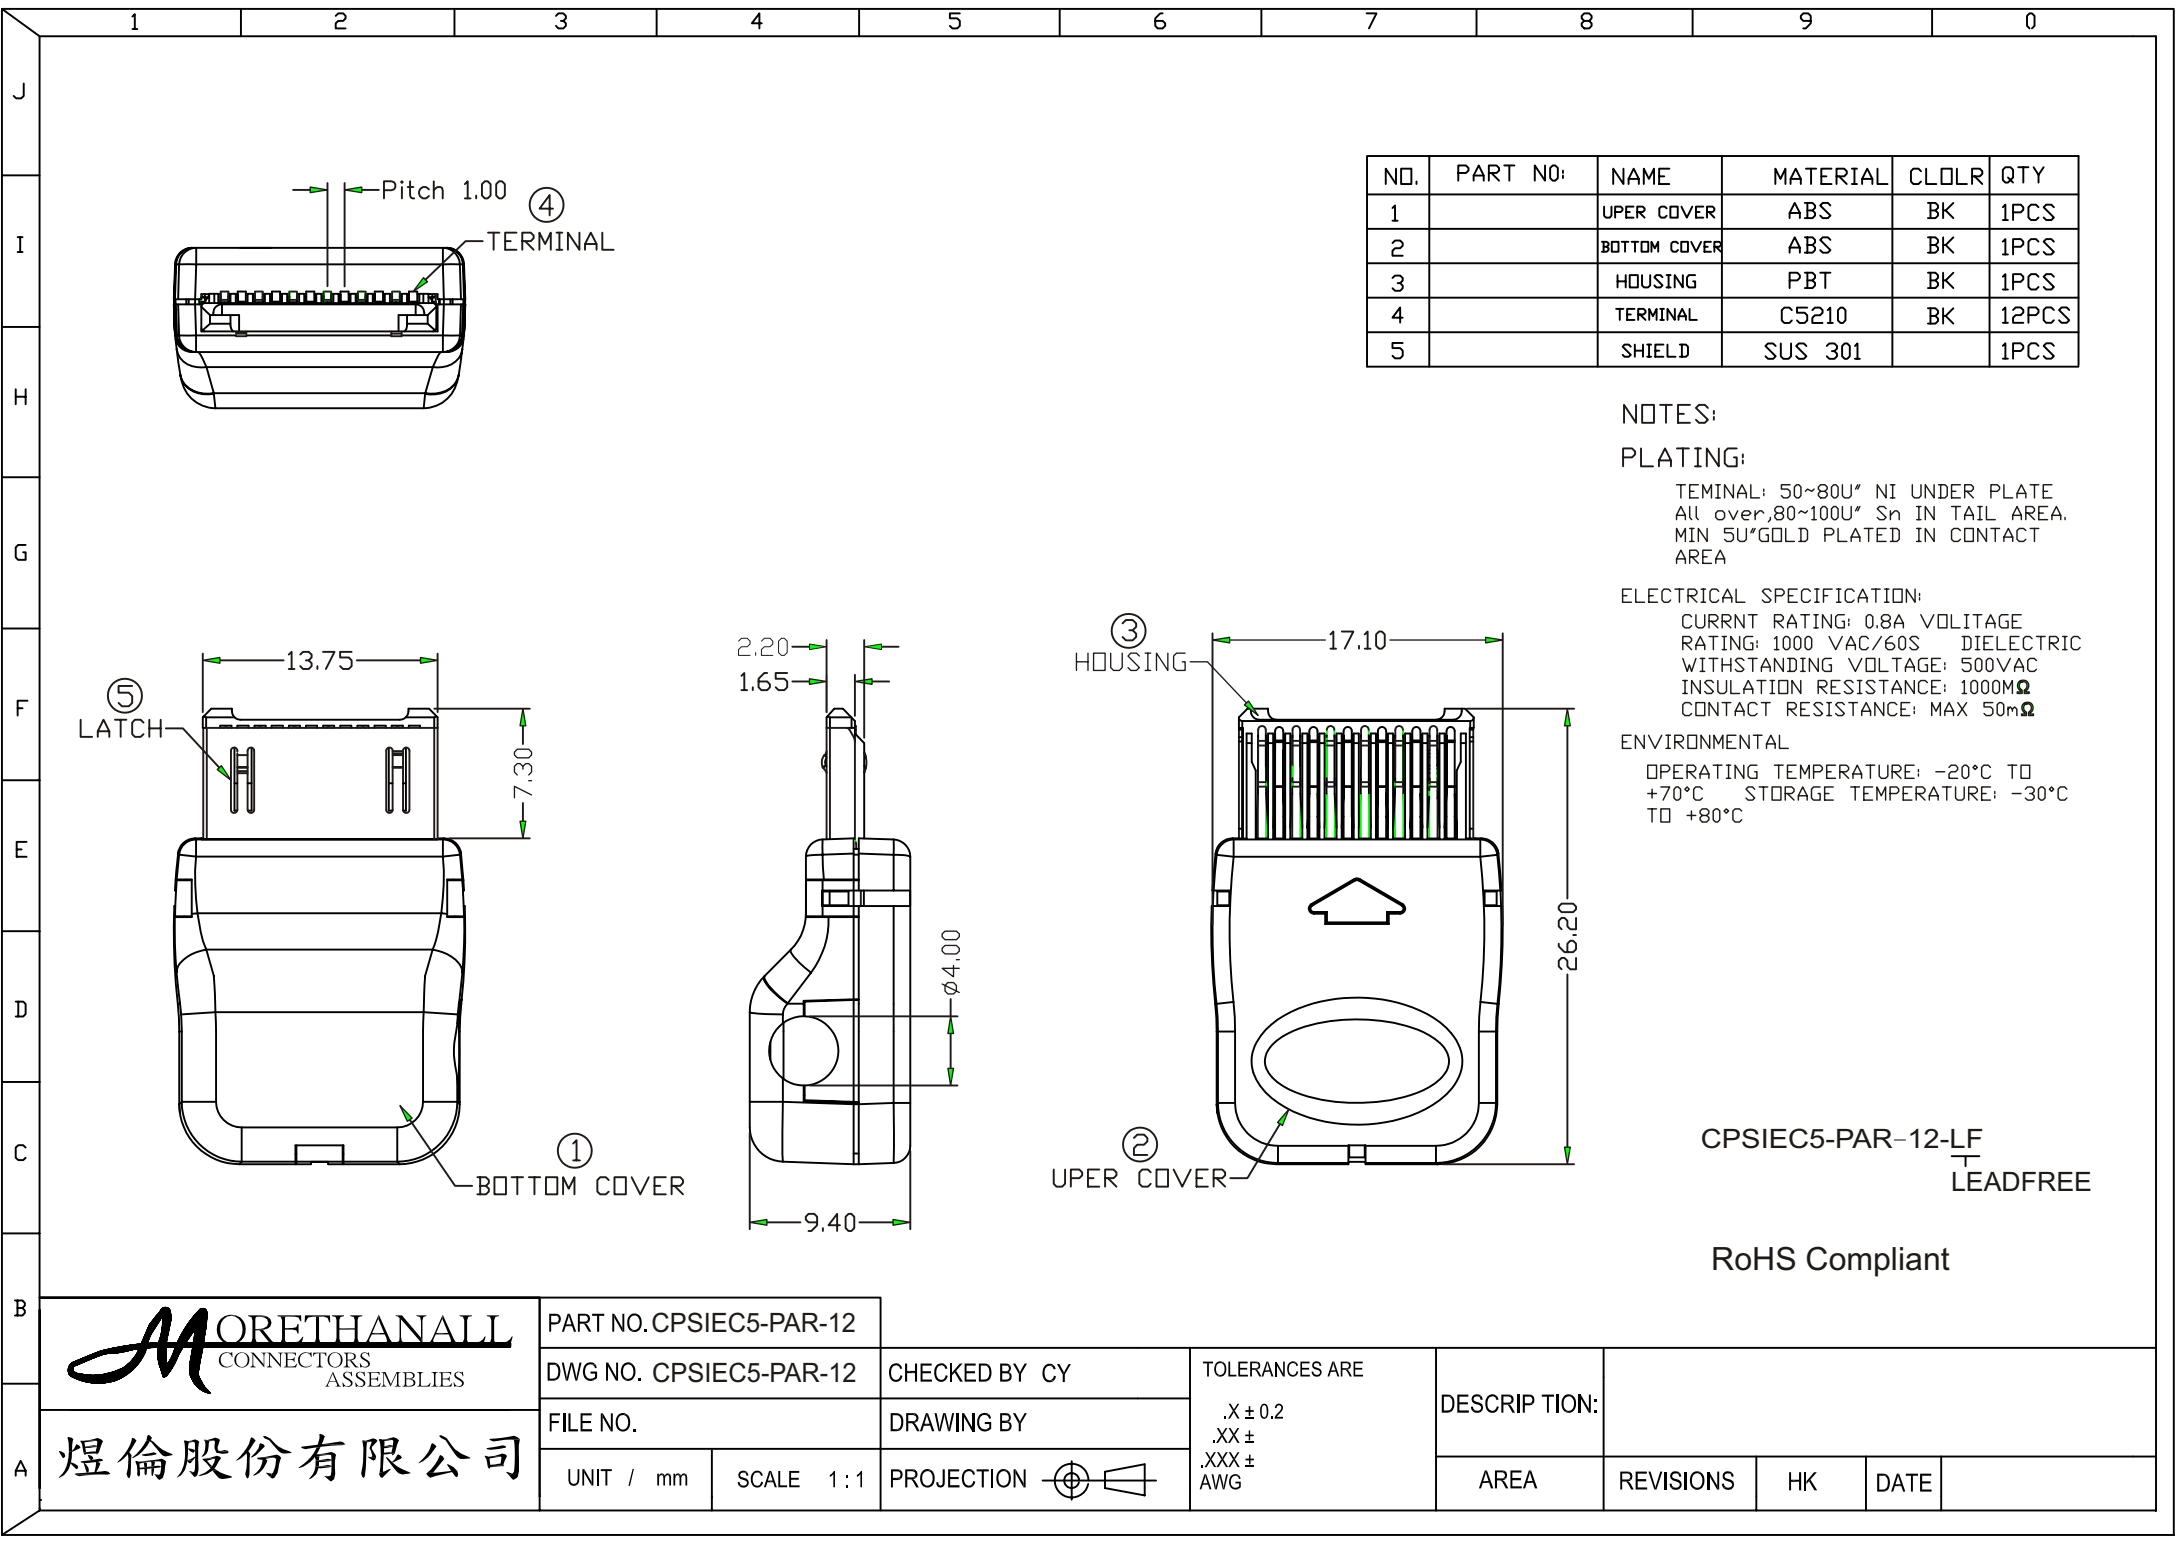

NO.	PART NO:	NAME	MATERIAL	COLOR	QTY
1		UPPER COVER	ABS	BK	1PCS
2		BOTTOM COVER	ABS	BK	1PCS
3		HOUSING	PBT	BK	1PCS
4		TERMINAL	C5210	BK	12PCS
5		SHIELD	SUS 301		1PCS

NOTES:
PLATING:
TERMINAL: 50~80U" NI UNDER PLATE
All over,80~100U" Sn IN TAIL AREA.
MIN 5U"GOLD PLATED IN CONTACT AREA

ELECTRICAL SPECIFICATION:
CURRNT RATING: 0.8A VOLTAGE RATING: 1000 VAC/60S DIELECTRIC WITHSTANDING VOLTAGE: 500VAC INSULATION RESISTANCE: 1000MΩ CONTACT RESISTANCE: MAX 50mΩ

ENVIRONMENTAL
OPERATING TEMPERATURE: -20°C TO +70°C STORAGE TEMPERATURE: -30°C TO +80°C

CPSIEC5-PAR-12-LF
LEADFREE

RoHS Compliant



煜倫股份有限公司

PART NO. CPSIEC5-PAR-12									
DWG NO. CPSIEC5-PAR-12		CHECKED BY CY	TOLERANCES ARE .X ± 0.2 .XX ± .XXX ± AWG	DESCRIP TION:					
FILE NO.		DRAWING BY							
UNIT / mm	SCALE 1:1	PROJECTION 		AREA	REVISIONS	HK	DATE		