


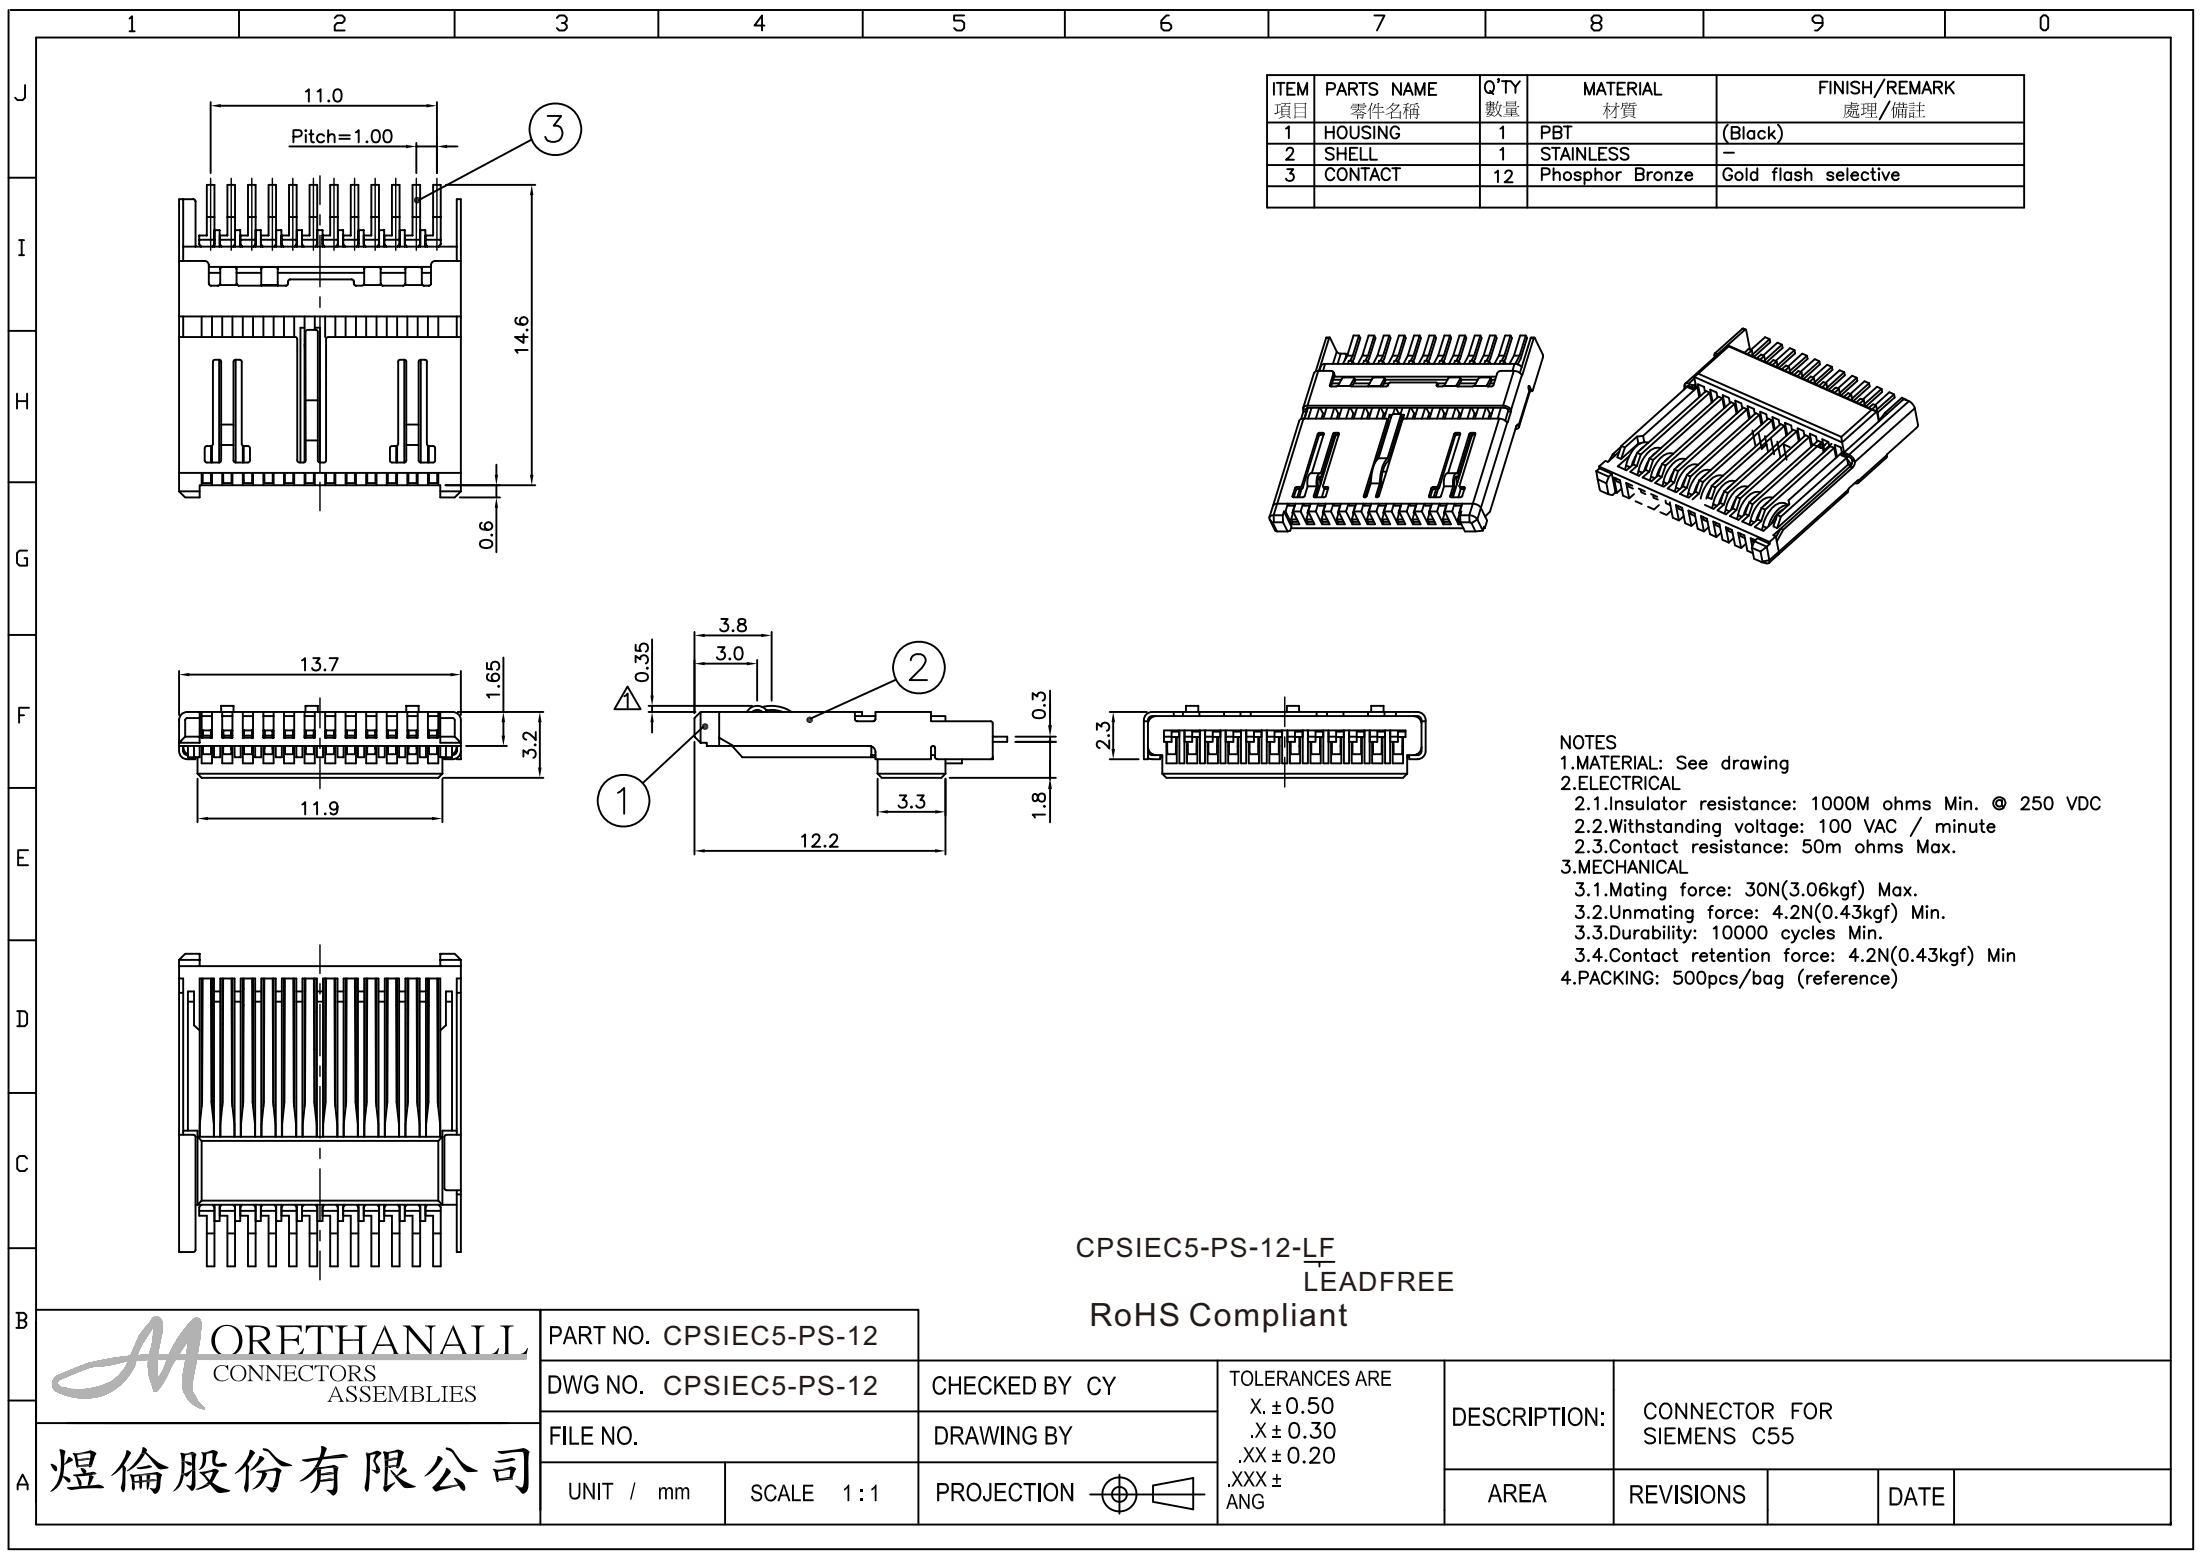

ITEM 項目	PARTS NAME 零件名稱	Q'TY 數量	MATERIAL 材質	FINISH/REMARK 處理/備註
1	HOUSING	1	PBT	(Black)
2	SHELL	1	STAINLESS	-
3	CONTACT	12	Phosphor Bronze	Gold flash selective

NOTES
1.MATERIAL: See drawing
2.ELECTRICAL
2.1.Insulator resistance: 1000M ohms Min. @ 250 VDC
2.2.Withstanding voltage: 100 VAC / minute
2.3.Contact resistance: 50m ohms Max.
3.MECHANICAL
3.1.Mating force: 30N(3.06kgf) Max.
3.2.Unmating force: 4.2N(0.43kgf) Min.
3.3.Durability: 10000 cycles Min.
3.4.Contact retention force: 4.2N(0.43kgf) Min
4.PACKING: 500pcs/bag (reference)

CPSIEC5-PS-12-LF
LEADFREE
RoHS Compliant

 MORETHANALL CONNECTORS ASSEMBLIES 煜倫股份有限公司	PART NO. CPSIEC5-PS-12		RoHS Compliant							
	DWG NO. CPSIEC5-PS-12		CHECKED BY CY	TOLERANCES ARE X. ±0.50 .X ±0.30 .XX ±0.20 .XXX ± ANG	DESCRIPTION:	CONNECTOR FOR SIEMENS C55				
	FILE NO.		DRAWING BY		AREA	REVISIONS		DATE		
	UNIT / mm	SCALE 1:1	PROJECTION 							

煜倫股份有限公司