


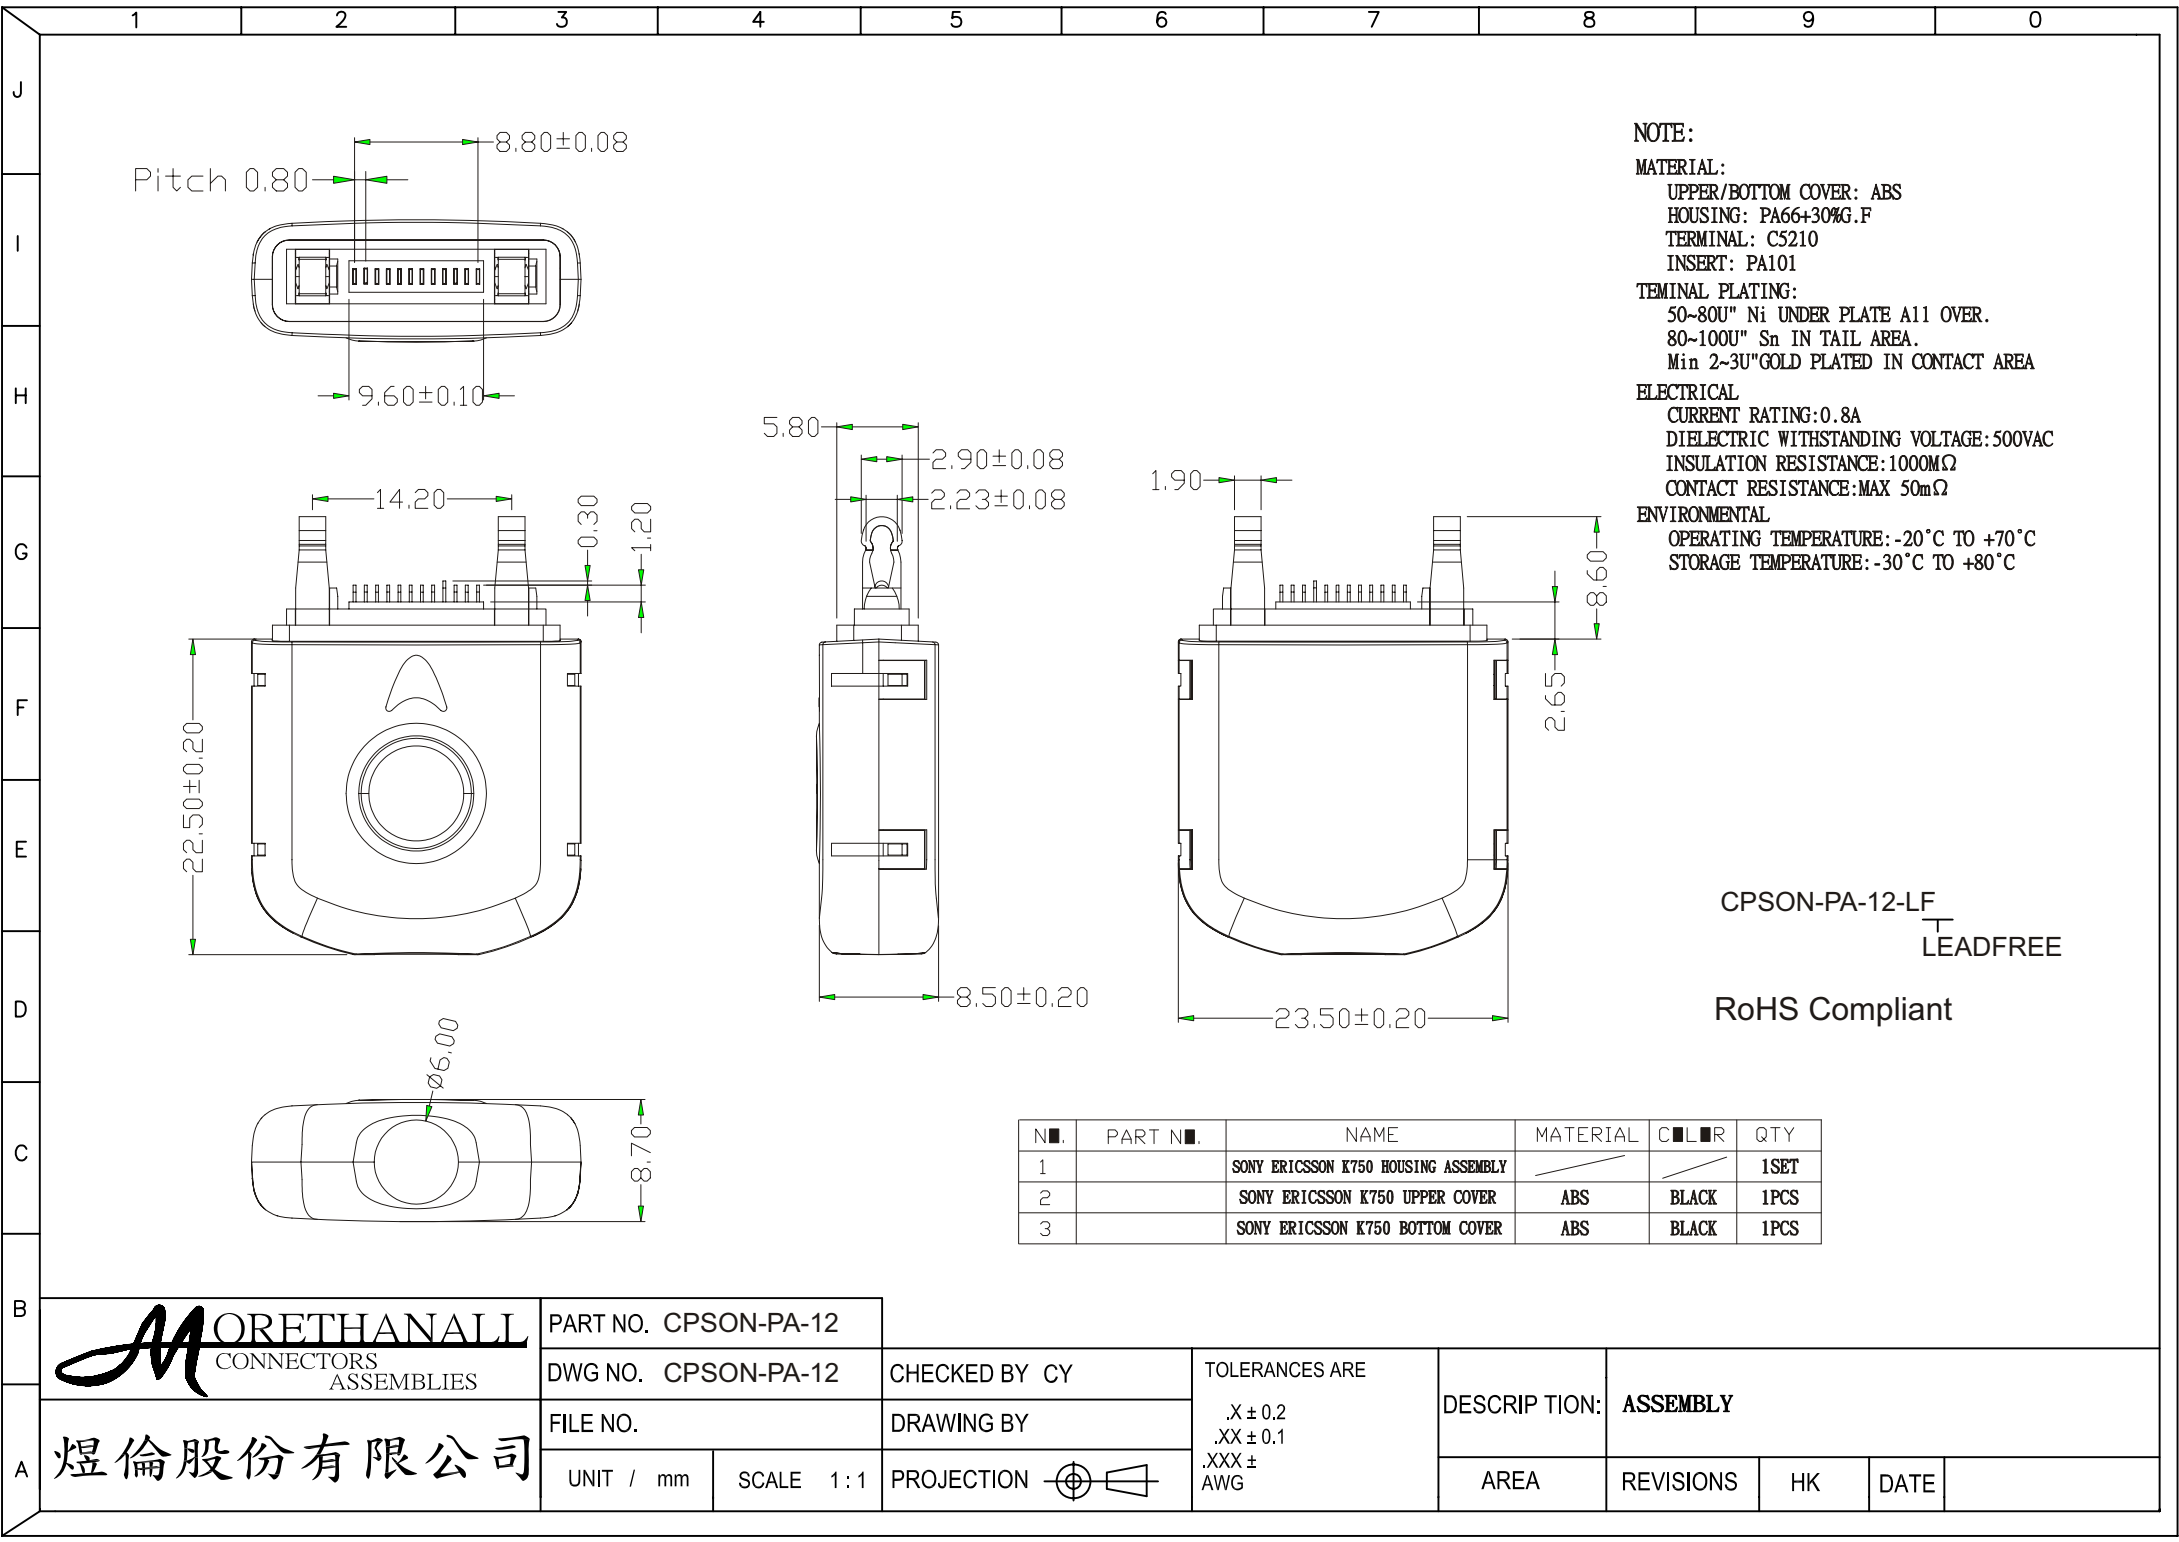

NOTE:

MATERIAL:

UPPER/BOTTOM COVER: ABS
HOUSING: PA66+30%G.F
TERMINAL: C5210
INSERT: PA101

TERMINAL PLATING:

50~80U" Ni UNDER PLATE A11 OVER.
80~100U" Sn IN TAIL AREA.
Min 2~3U"GOLD PLATED IN CONTACT AREA

ELECTRICAL

CURRENT RATING:0.8A
DIELECTRIC WITHSTANDING VOLTAGE:500VAC
INSULATION RESISTANCE:1000MΩ
CONTACT RESISTANCE:MAX 50mΩ

ENVIRONMENTAL

OPERATING TEMPERATURE:-20°C TO +70°C
STORAGE TEMPERATURE:-30°C TO +80°C

CPSON-PA-12-LF
LEADFREE

RoHS Compliant

N ₁	PART N ₁	NAME	MATERIAL	C ₁ L ₁ R	QTY
1		SONY ERICSSON K750 HOUSING ASSEMBLY			1SET
2		SONY ERICSSON K750 UPPER COVER	ABS	BLACK	1PCS
3		SONY ERICSSON K750 BOTTOM COVER	ABS	BLACK	1PCS

MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO. CPSON-PA-12

DWG NO. CPSON-PA-12

CHECKED BY CY

TOLERANCES ARE

DESCRIP TION: ASSEMBLY

FILE NO.

DRAWING BY

.X ± 0.2
.XX ± 0.1
.XXX ±
AWG

AREA

REVISIONS

HK

DATE

煜倫股份有限公司

UNIT / mm

SCALE 1:1

PROJECTION

