

Material & Finish

SHELL:

Steel

Zinc plated, Tin plated
or Nickel plated steel

PIN CONTACT:

Phosphor Bronze
Gold plated

INSULATOR:

PBT & Glass-fibre reinforced
UL-94-V0

CURRENT RATING:

5 Amp

DIELECTRIC WITHSTANDING VOLTAGE:


1000VAC for one minute Min.

INSULATOR RESISTANCE:

3000M Ω Min. (at 500VDC)


TEMPERATURE:

-55°C to +105°C

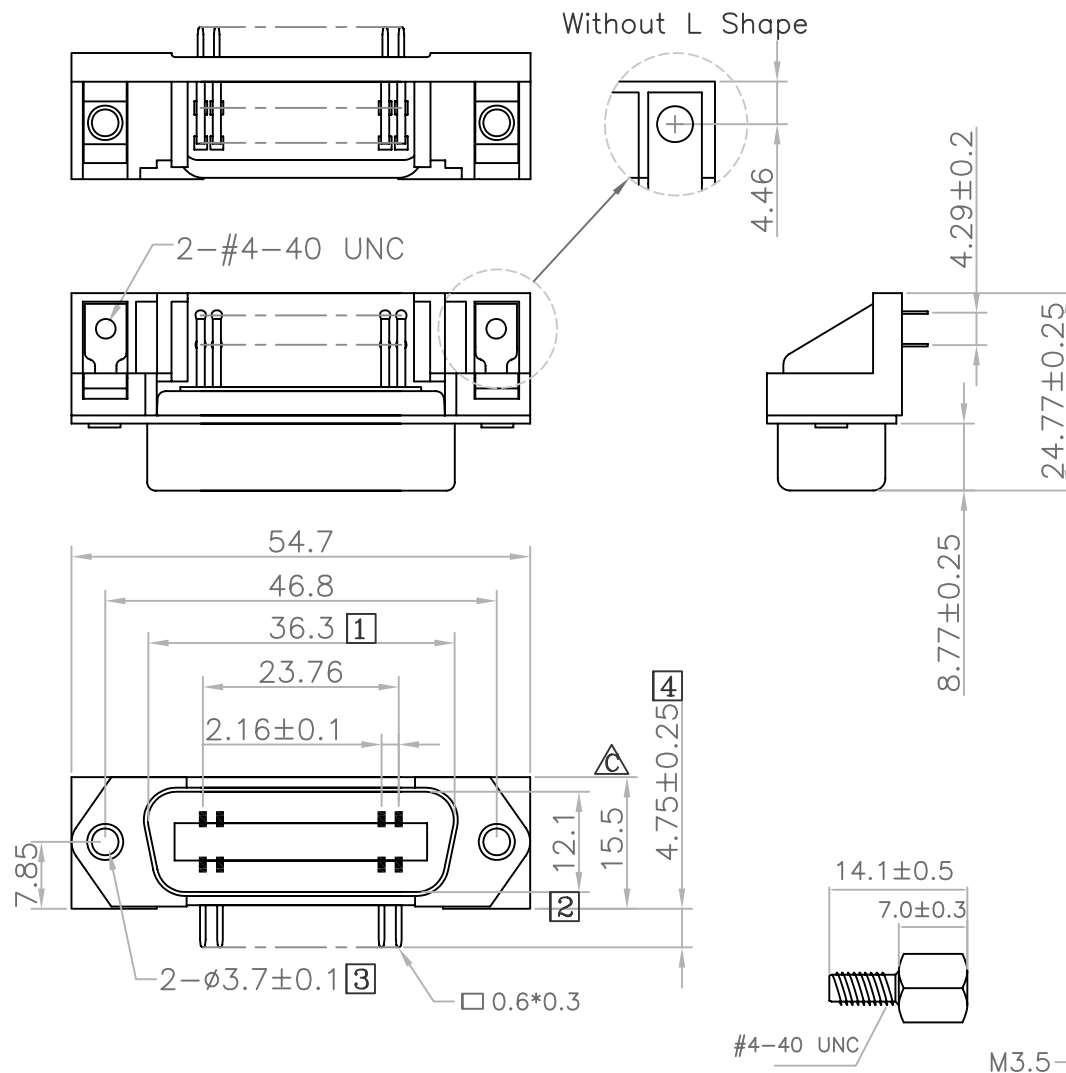

MATERIAL: Copper

FINISH: Nickel Plated

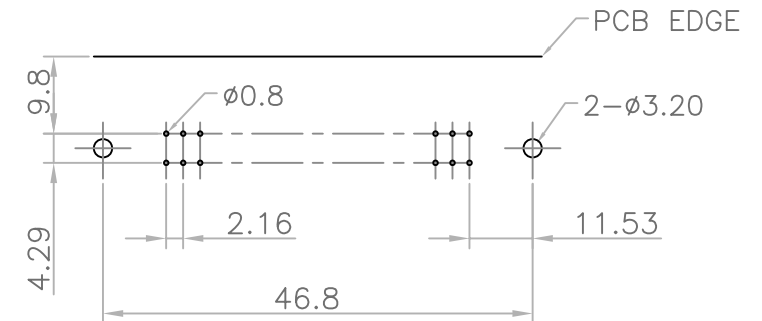

P.C.B. LAYOUT

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

TOLERANCES ARE

X $\pm$ 0.40

.X $\pm$ 0.30

.XX $\pm$ 0.20

.XXX $\pm$

ANG $\pm$ 3°

PPOJECTION

照片框

ORDER INFORMATION

CR-PLNHM35-24-LF

SERIES

MALE

L TYPE

NUT

M3.5

HEX SCREW

24WAY

LEADFREE

DESCRIPTION: CENTRONIC P.C.B. R/A TYPE MALE 24 PIN