


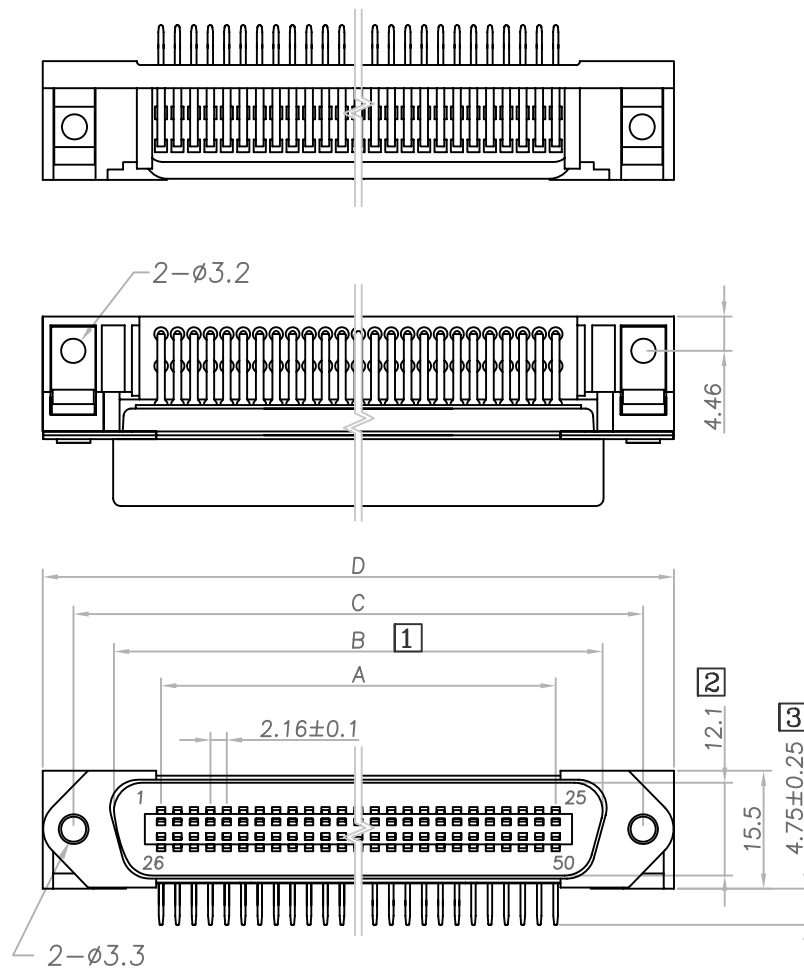

Positions	A	B	C	D
14	12.96	25.6	36.0	43.9
24	23.76	36.3	46.8	54.7
36	36.72	49.3	59.7	67.7
50	51.84	64.4	74.9	82.8

Material & Finish

SHELL:

Steel, Nickel Plated

PIN CONTACT:

Phosphor Bronze

Gold Flash Plated

INSULATOR:

PBT & Glass-fibre reinforced

UL-94-V0 Blue

CURRENT RATING:

3 Amp

CONTACT RESISTANCE:

30mΩ Max

DIELECTRIC STRENGTH:


1000VAC for one minute

INSULATOR RESISTANCE:

1000MΩ Min. (at 500VDC)

TEMPERATURE:

-55°C to +105°C

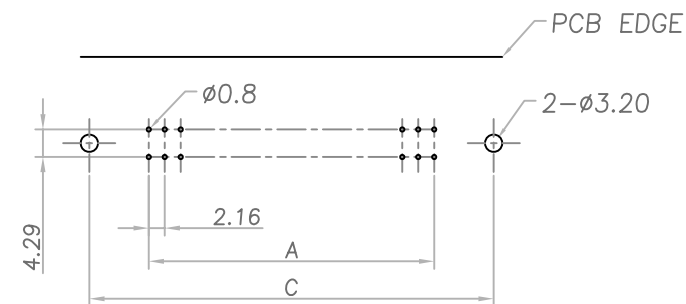

RECOMMENDED PCB LAYOUT

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

X. ± 0.40

CHECKED BY GENIUS

.X ± 0.30

UNIT / mm

SCALE 1 : 1

.XX ± 0.20

DATE

.XXX ±

ANG ± 3°

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

CR-PLNX33-xx-LF

SERIES
LEADFREE
14~50WAY
NON-THREAD 3.3 DIA
L TYPE
MALE

DESCRIPTION: CENTRONIC PCB R/A TYPE MALE RIVET L SHAPE Ø3.3

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com