


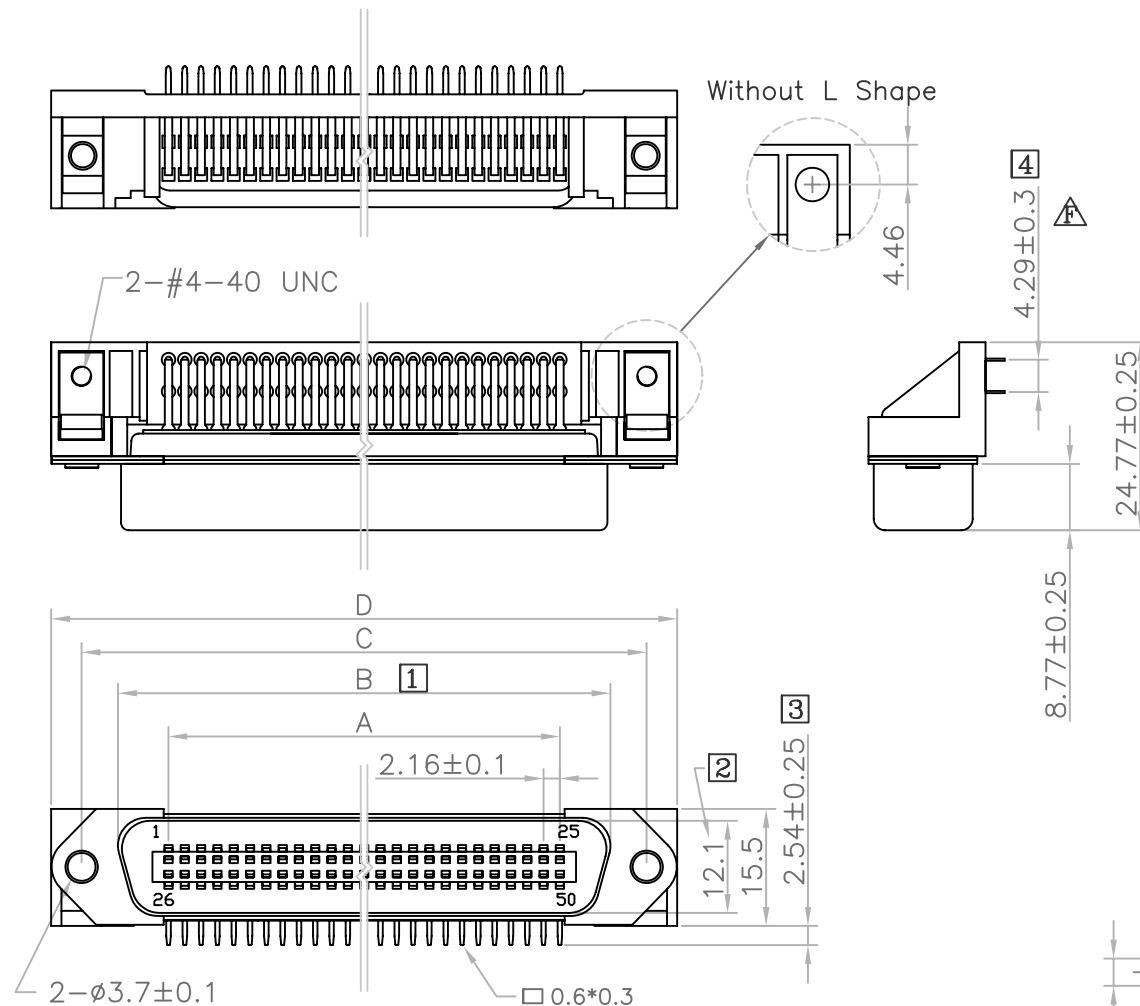

Material & Finish

SHELL:

Steel
Nickel plated steel

PIN CONTACT:

Phosphor Bronze
Gold flash plated

INSULATOR:

PBT & Glass-fibre reinforced
UL-94-V0, Blue

CURRENT RATING:

3 Amp

DIELECTRIC STRENGTH:


1000V for one minute

INSULATOR RESISTANCE:

1000M Ω Min. (at 500V DC)

TEMPERATURE:

-55°C to +105°C

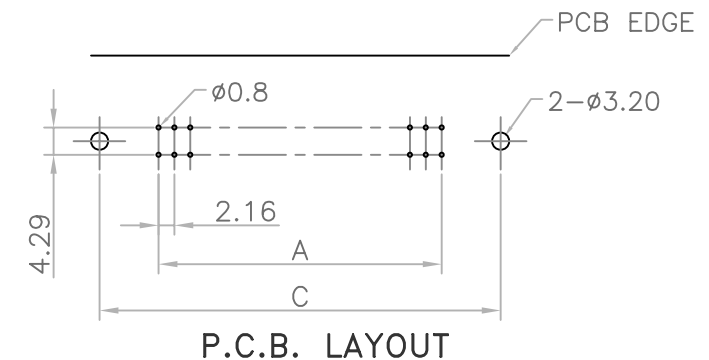

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

X. ± 0.40

CHECKED BY GENIUS

.X. ± 0.30

UNIT / mm

SCALE 1 : 1

.XXX $\pm$

ANG $\pm 3^\circ$

DATE

SIZE A4

PPOJECTION 

照片框

ORDER INFORMATION

CR-PLNX37-24-LF

SERIES
LEADFREE
24WAY
NON-THREAD 3.7 DIA
L TYPE
MALE

DESCRIPTION: CENTRONIC PCB R/A TYPE MALE RIVET $\phi 3.7$ L SHAPE, 針長 2.54mm

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com