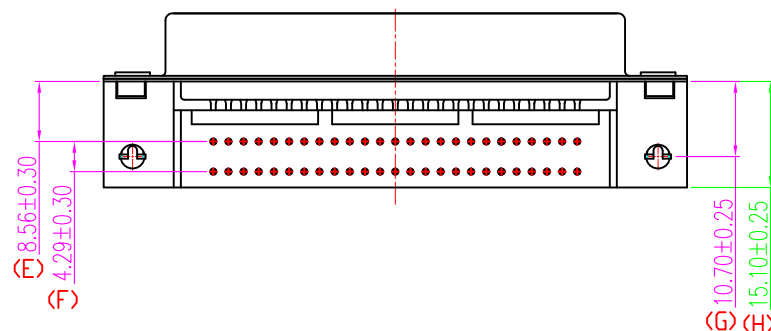
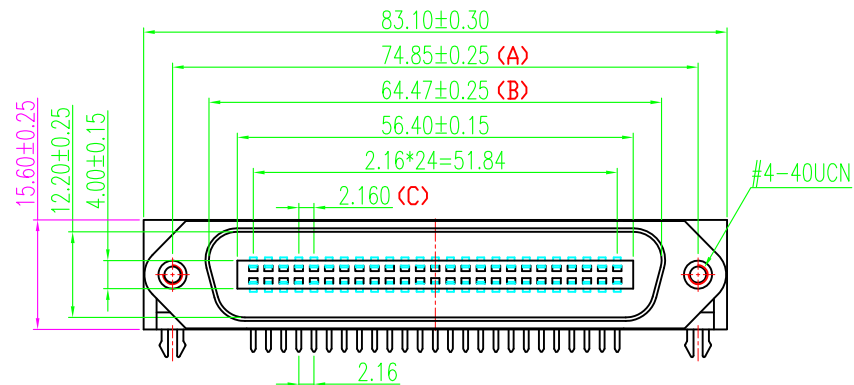


NOTES

- MATERIAL:**
Housing: PBT, UL 94V-0, Color: Blue.
Terminal: Copper Alloy.
Shell: SPCC.
Boardlock: Copper Alloy.
Rivet: Copper Alloy.
- FINISH:**
Terminal: Gold Plated over Nickel at Contact Area.
Tin Plated over Nickel at Solder Area.
Shell: Nickel Plated.
Boardlock: Tin Plated.
Rivet: Nickel Plated.
- This Product is LEAD-FREE & RoHS Compliance Product.

SPECIFICATIONS

- CENTRONIC**
 - Voltage: 250 VAC(RMS) Max.
 - Current Rating: 1 Ampere per Contact
 - Contact Resistance: 30 Milliohms Max.
 - Insulation Resistance: 1000 Megohms Min.
 - Dielectric Withstanding Voltage: 1000V AC(RMS)
 - Contact Insertion Force: 25 pounds. Maximum.
 - Contact Separation Force: 2 pounds. Minimum.
 - Operating Temperature: -55°C to +105°C

RECOMMENDED P.C.B LAYOUT
INSPECTION DIMENSION: (A)~(H)

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±
.X ±
.XX ± 0.25
.XXX ± 0.13
ANG ± 2°

PPOJECTION

照片框

ORDER INFORMATION

CR-PZN-50-LF
SERIES NUT CLIP MALE
LEADFREE
50 WAY

DESCRIPTION: