


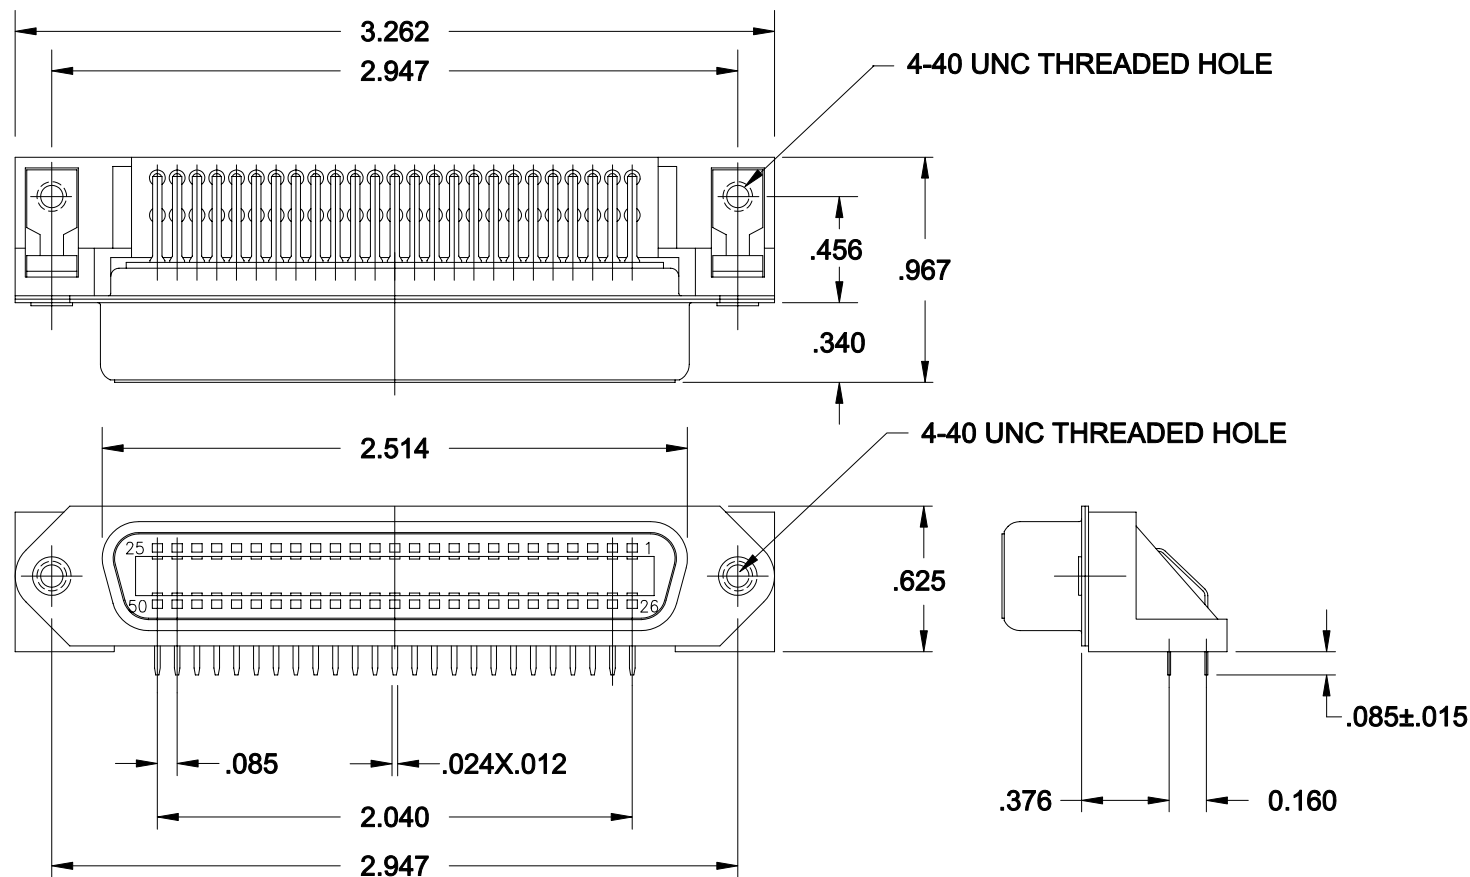

ELECTRICAL SPECIFICATIONS

CONTACT CURRENT RATING: 3 AMPERE
DIELECTRIC WITHSTANDING VOLTAGE: 1200 VAC R.M.S.
INSULATION RESISTANCE: 1000 MEGOHMS MIN. AT 500 VDC
CONTACT RESISTANCE: 30 MILLIOHMS MAX.
OPERATING TEMPERATURE: -55°C TO +105°C

MATERIALS:

INSULATOR : THERMOPLASTIC POLYESTAR COLOR BLUE, UL 94V-0 RATING
SHELLS: STELL, NICKEL PLATED
CONTACTS: COPPER ALLOY W/30 MICROINCHES OF GOLD PLATED ON CONTACT AREA
TIN/LEAD ON TAILS OVER NICKEL

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

CR SLN-50-LF
SERIES
LEADFREE
50 WAY
NUT
L BRACKET
FEMALE

DESCRIPTION: 50 POSITION MINIATURE RIBBON RECEPTACLE RIGHT ANGLE P.C.B.(100 MAX. TAILS LG.)