

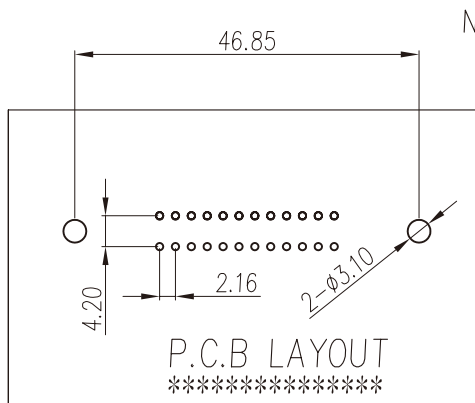
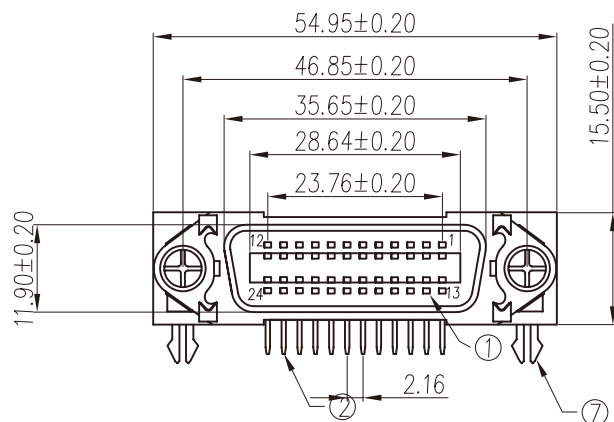




Note:

Specification:

1. Current rating: 1 A Max.
2. Dielectric withstanding voltage: 500 V(ac) for 1 minute.
3. Contact resistance: 30 mΩ Max.
4. Insulation resistance: 1000 MΩ Min at DC 500V.
5. Insertion force: 5.5 Kgf Max.
6. Extraction force: 1.5 Kgf Min.
7. Temperature range: -55°C~+105°C

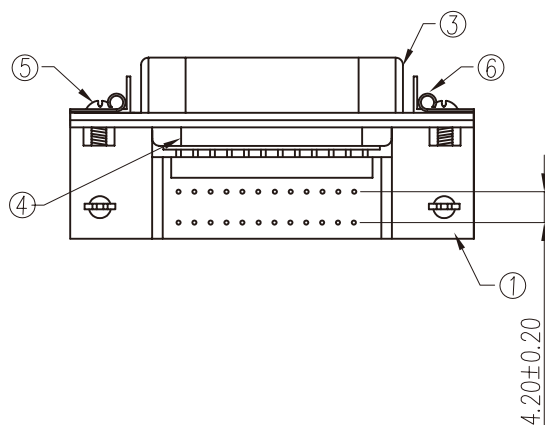

7	"Z" type board-lock	2	Cold Rolled Steel	T=0.5mm	Cu: 40u"min. 80~120u" Tin Plated
6	Trangle	2	Cold Rolled Steel	T=0.60mm	Cu: 40u"min. 80~120u" Nickel Plated
5	Screw	2	Brass	Ø5.2*7.2	80~120u" Nickel Plated
4	Back-shell	1	Cold Rolled Steel	T=0.40mm	Cu: 40u"min. 80~120u" Nickel Plated
3	Front-shell	1	Cold Rolled Steel	T=0.40mm	Cu: 40u"min. 80~120u" Nickel Plated
2	Contact	24	Brass	T=0.30mm	Contact area: 0.8~1.2u" Gold Plated over 40u" Nickel min. Solder area: 80~120u" Tin Plated over 40u" Nickel min.
1	Housing	2	P.B.T	UL 94-V0	Black/White/Blue
No.	Name	Q'ty	Material	Remarks & Thickness	Finish

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

CR-SZ-24-LF
SERIES T LEADFREE
CLIP 24WAY
FEMALE

DESCRIPTION: CENTRONIC 24PIN(F) 90° DIP 鍍三角片鎖 Z 片鎖十字小 NUT