


Note:

1.Material:

- 1.1 Insulator: High temperature thermoplastic with g.f,UL94v-0
- 1.2 Contact: Copper alloy,t=0.25mm
- 1.3 Shell: Spcc,t=0.40mm,50P Front-shell t=0.60mm

2.Specification:

- 2.1 Current rating: 1 A Max.
- 2.2 Dielectric withstanding voltage: 750 V(ac) for 1 min.
- 2.3 Contact resistance: 30 mΩ Max.
- 2.4 Insulation resistance: 1000 MΩ Min.
- 2.5 Total mating force: 9.0 Kgf Max.
- 2.6 Total unmating force: 5.0 Kgf Min.
- 2.7 Temperature range: -55°C~85°C

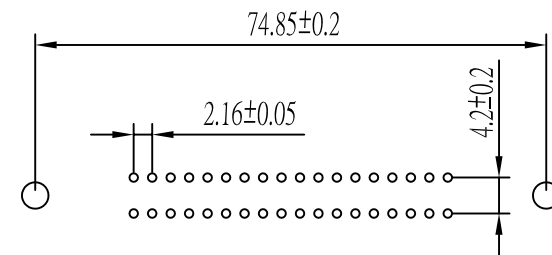

P.C.B LAYOUT

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

P PROJECTION

照片框

ORDER INFORMATION

CR-SZJ-50-LF
SERIES LEADFREE
50WAY JACKSCREW
CLIP FEMALE

DESCRIPTION: CENTRONIC RIGHT ANGLE P.B.C 50PIN SOLDER (F)

煜倫股份有限公司

www.morethanall.com