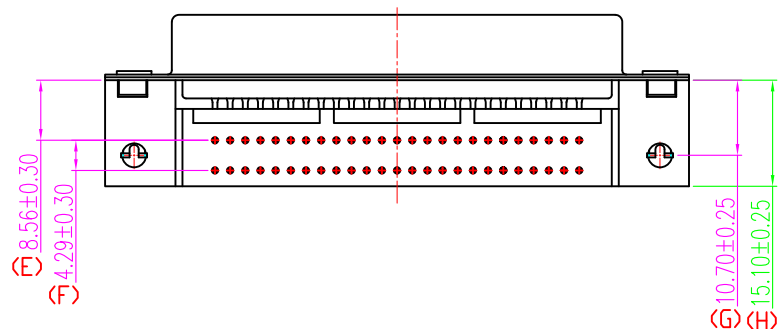
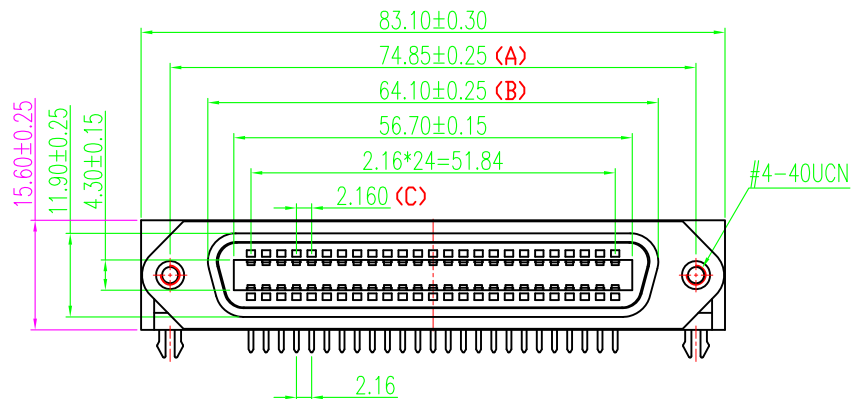


RECOMMENDED P.C.B LAYOUT
INSPECTION DIMENSION:(A)~(H)

NOTES

- MATERIAL:
Housing:PBT, UL 94V-0, Color:Blue.
Terminal:Copper Alloy.
Shell:SPCC.
Boardlock:Copper Alloy.
Rivet:Copper Alloy.
- FINISH:
Terminal:Gold Plated over Nickel at Contact Area.
Tin Plated over Nickel at Solder Ared.
Shell:Nickel Plated.
Boardlock:Tin Plated.
Rivet:Nickel Plated.
- This Product is LEAD-FREE & RoHS Compliance Product.

SPECIFICATIONS

- CENTRONIC
- 1.1 Voltage: 250 VAC(RMS) Max.
- 1.2 Current Rating: 1 Ampere per Contact
- 1.3 Contact Resistance: 30 Milliohms Max.
- 1.4 Insulation Resistance: 1000 Megohms Min.
- 1.5 Dielectric Withstanding Voltage: 1000V AC(RMS)
- 1.6 Contact Insertion Force: 25 pounds. Maximum.
- 1.7 Contact Separation Force: 2 pounds. Minimum.
- 1.8 Operating Temperature: -55°C to $+105^{\circ}\text{C}$

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X $\pm$
.XX ± 0.25
.XXX ± 0.13
ANG $\pm 2^{\circ}$

照片框

ORDER INFORMATION

CR-SZN-50-LF
SERIES NUT CLIP FEMALE
LEADFREE
50 WAY

DESCRIPTION: