


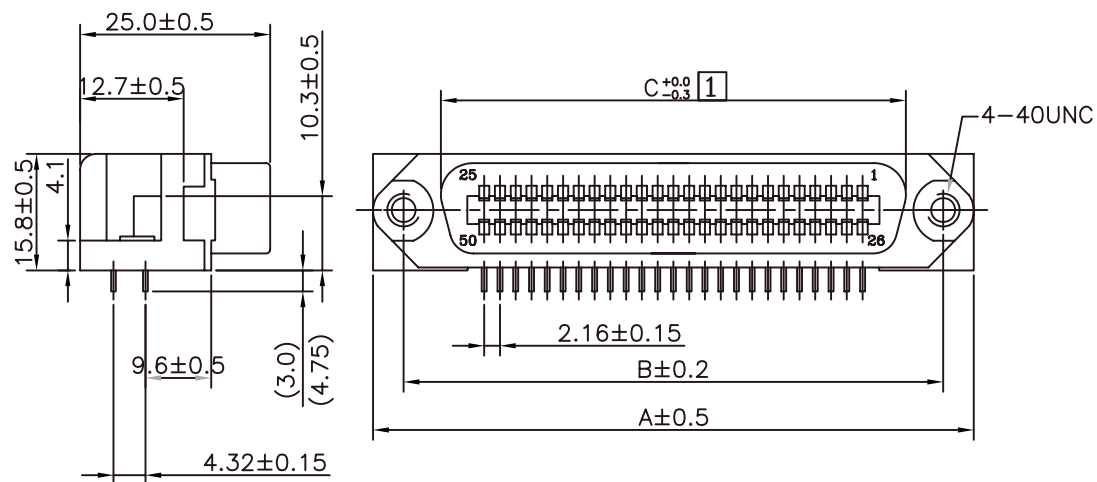


General Specifications:

- *Dielectric: Glass filled polyester Recognized UL 94V-0
- *Contact: Phosphor Bronze
- *Plating: Gold Plate over Nickel

Performance Characteristics:

- *Current Rating: 1A DC/max. per contact pair 1A/max. for simultaneous current on all contacts.
- *Contact Resistance: 25mΩ/Max.
- *Dielectric with standing voltage: AC 1000V
- *Insulation Resistance: 10000MΩ/Min.
- *Temperature Range: -55°C to $+125^{\circ}\text{C}$

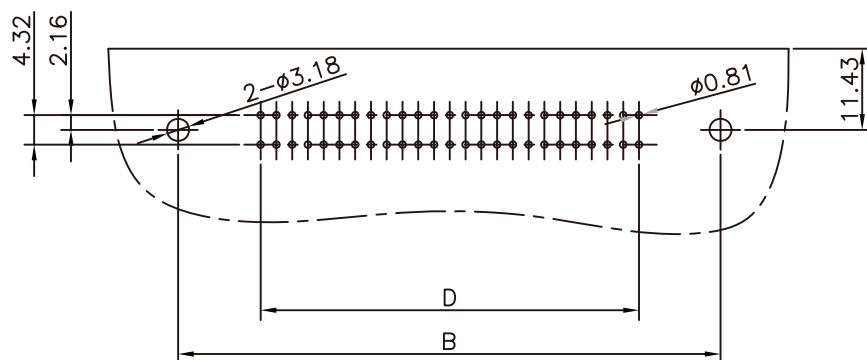

Printed Circuit Board Pattern

Contacts	A	B	C	D
14	44.15	35.95	25.38	12.96
24	54.95	46.75	36.18	23.76
36	67.91	59.71	49.14	36.72
50	83.03	74.83	64.26	51.84
64	98.15	89.95	79.38	66.96

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT/mm

SCALE 1:1

DATE

SIZE A4

TOLERANCES ARE

X. $\pm$

.X $\pm$

.XX $\pm$

.XXX $\pm$

ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

CRP-SN-xx-LF
SERIES NUT FEMALE
LEADFREE
14~64WAY

DESCRIPTION: Ribbon P.C.B. R/A Type Connector
64 Pin Socket Screw Lock Type