



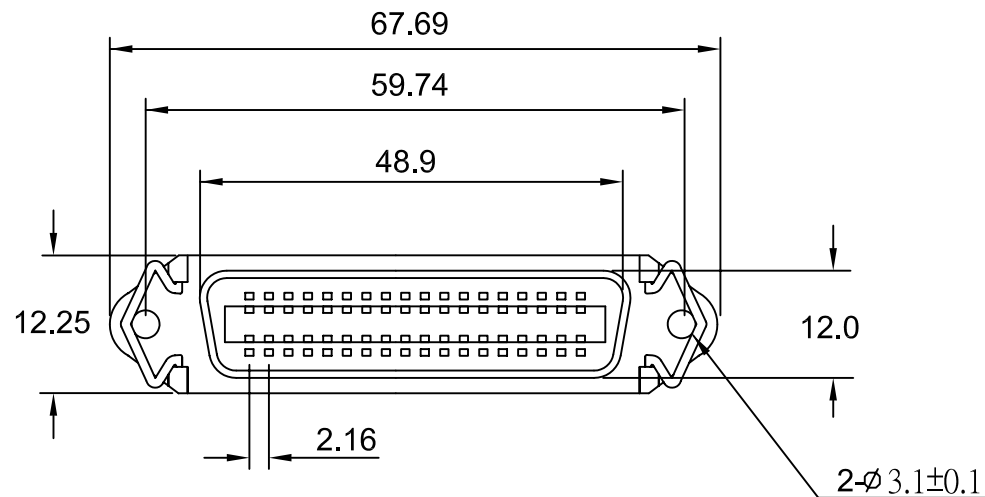


Note:

1. Material:
 - 1.1 Insulator: High temperature thermoplastic with g.f, UL94v-0
 - 1.2 Contact: Copper alloy, $t=0.25\text{mm}$
 - 1.3 Shell: Spcc, $t=0.40\text{mm}$, 50P Front-shell $t=0.60\text{mm}$

2. Specification:

- 2.1 Current rating: 1 A Max.
- 2.2 Dielectric withstanding voltage: 750 V(ac) for 1 min.
- 2.3 Contact resistance: 30 mΩ Max.
- 2.4 Insulation resistance: 1000 MΩ Min.
- 2.5 Total mating force: 9.0 Kgf Max.
- 2.6 Total unmating force: 1.0 Kgf Min.
- 2.7 Temperature range: $-55^{\circ}\text{C} \sim 85^{\circ}\text{C}$

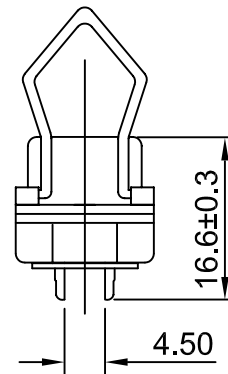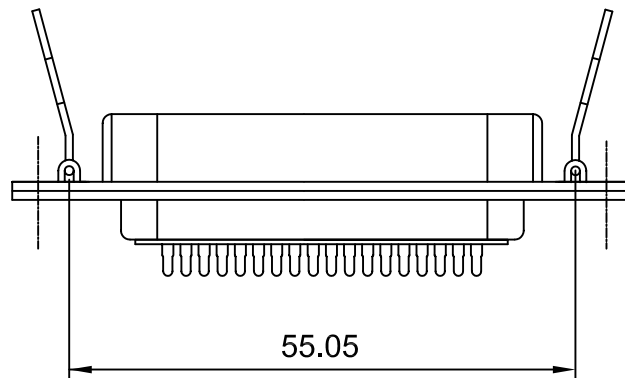

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±

.X, ±

.XX, ±

.XXX, ±

ANG, ±

PPOJECTION

ORDER INFORMATION

CS-S4-36-LF
SERIES 36WAY FOUR HOLE
LEADFREE
SOLDER

DESCRIPTION: CENTRONIC SOLDER FEMALE 鉚三角片