


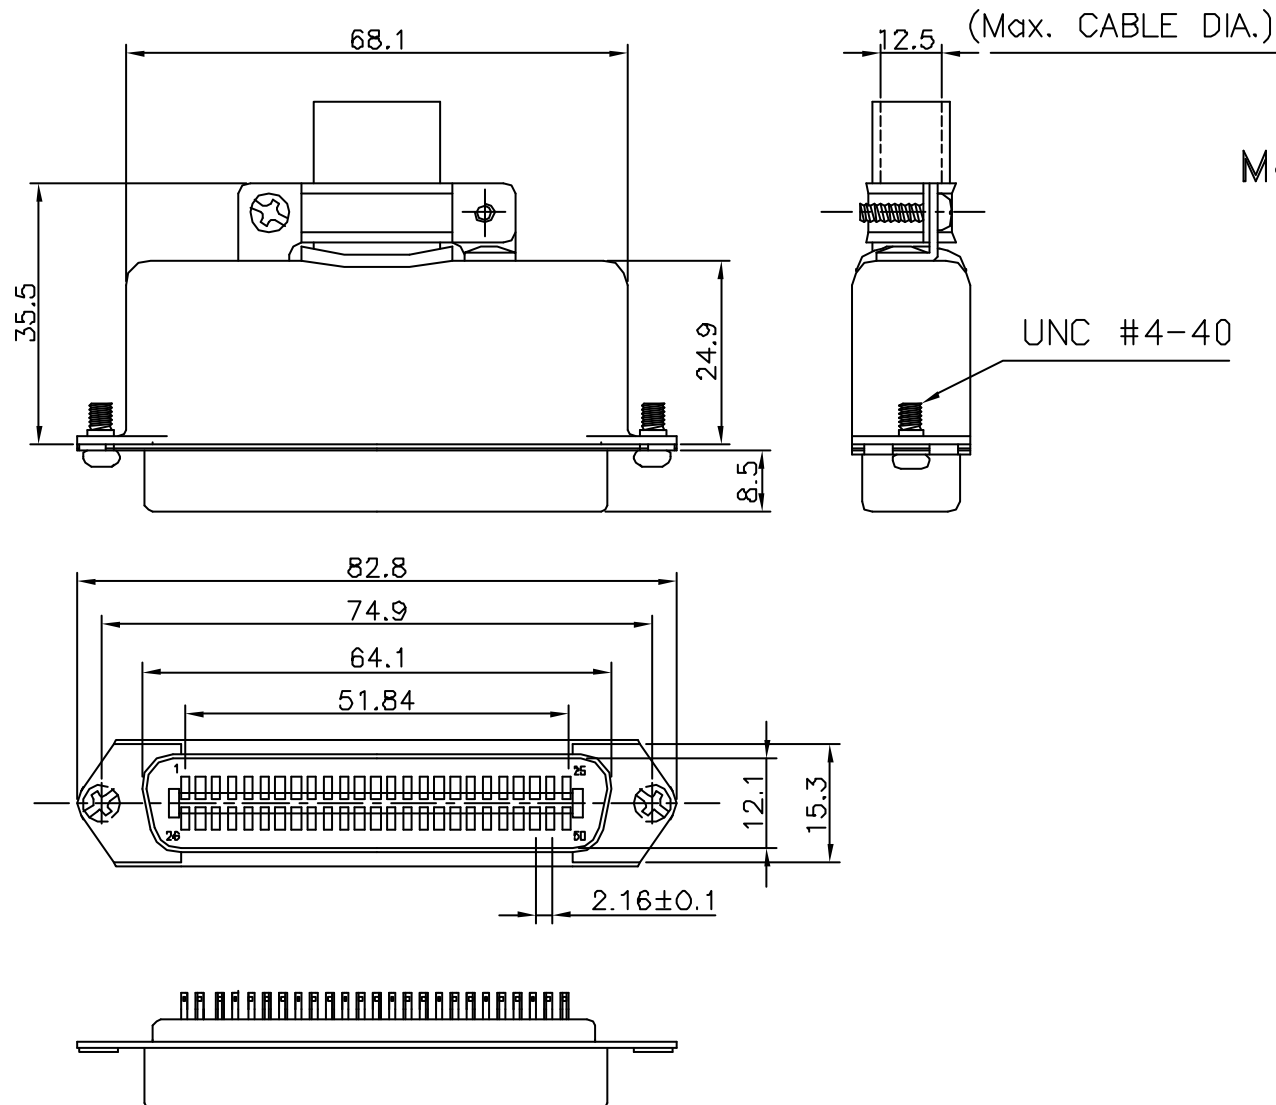

Material & Finish

SHELL:

Steel
Zinc plated, Tin plated
or Nickel plated steel

PIN CONTACT:

Phosphor bronze or brass
Gold plated

INSULATOR:

PBT & Glass-fibre reinforced
UL-94-V0

CURRENT RATING:

5 Amp

DIELECTRIC STRENGTH:

1000V for one minute

INSULATOR RESISTANCE:

1000MΩ Min. (at 500V DC)

TEMPERATURE:

-55°C to +105°C

MORETHANALL
CONNECTORS
ASSEMBLIES

煜倫有限公司

PART NO. **CSH-PA-50**

DWG NO. **CSH-PA-50**

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X ±
.XX ±
.XXX ±
AWG

DESCRIP TION:

**57 SOLDER MALE WITH SCREW
ASSEMBLY TYPE (RC1+RC6)
50PIN**

AREA

REVISIONS

HK

DATE