

SPECIFICATIONS

Current Rating: 1A AC,DC

Voltage Rating: 100V AC,DC

Temperature Range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$



Contact Resistance: 20mΩ Max.

Insulation Resistance: 1000MΩ Min.

Withstanding Voltage: 800V AC/minute

Pin Material: Brass/Tin-plated

Material: Nylon 66,UL94V-0

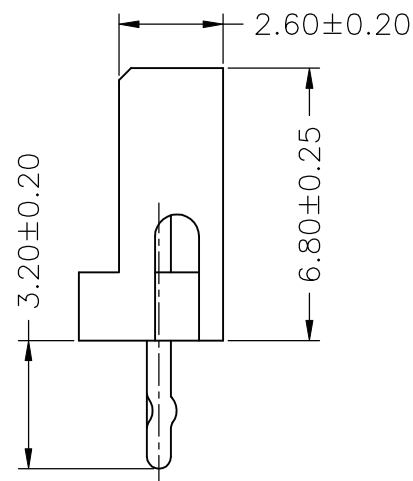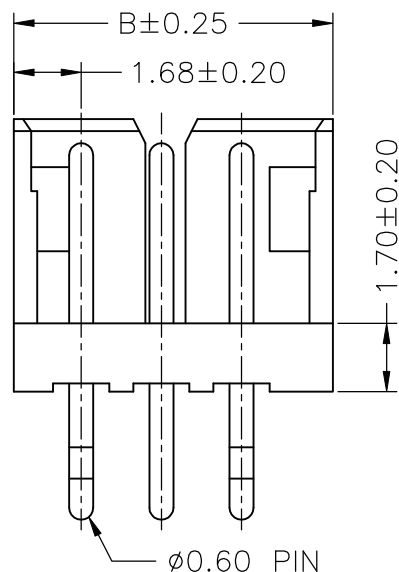

Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
CT-D-02	2.00	5.96
CT-D-03	4.00	7.96
CT-D-04	6.00	9.96
CT-D-05	8.00	11.96
CT-D-06	10.00	13.96
CT-D-07	12.00	15.96
CT-D-08	14.00	17.96
CT-D-09	16.00	19.96
CT-D-10	18.00	21.96
CT-D-11	20.00	23.96
CT-D-12	22.00	25.96
CT-D-13	24.00	27.96
CT-D-14	26.00	29.96
CT-D-15	28.00	31.96

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

CT-Dxx-xx-LF
SERIES T LEADFREE
02~15WAY
YL:YELLOW
BL:BLUE
BK:BLACK
DIP 180°

DESCRIPTION: 2.00mm PITCH 180° WAFER